



Customer information packet

EM3219T-5

7.5HP, 3500RPM, 3PH, 60HZ, 184T, 3646M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM CURUSEEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.700 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.7 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail

Revision	AE
Type	AC
Mech. spec.	36G548
Base	
Status	PRD/A
Elec. spec.	36WGX579
Layout	36LYG548
Eff. date	05-01-2024
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	01-01-0001

KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3646M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	16.50 IN
Power Factor	93
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1259L											
CAT.NO.	EM3219T-5										
SPEC.	36G548X579G1										
HP	7.5										
VOLTS	575										
AMP	6.7										
RPM	3500										
FRAME	184T		HZ	60			PH	3			
SER.F.	1.15	CODE	H	DES	B	CL	F				
NEMA-NOM-EFF	90.2	PF	93								
RATING	40C AMB-CONT										
CC	010A										
DE	6206		ODE	6205							
ENCL	OPSB	SN									

AC Induction Motor Performance Data

Record # 35752

Typical performance - not guaranteed values

Winding: 36WGX579-R002		Type: 3646M	Enclosure: OPEN
Nameplate Data		575 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	7.5	Full Load Torque	11.2 LB-FT
Volts	575	Start Configuration	direct on line
Full Load Amps	6.7	Breakdown Torque	55 LB-FT
R.P.M.	3500	Pull-up Torque	40 LB-FT
Hz	60 Phase	Locked-rotor Torque	48 LB-FT
NEMA Design Code	B KVA Code	Starting Current	70 A
Service Factor (S.F.)	1.15	No-load Current	1.8 A
NEMA Nom. Eff.	90.2 Power Factor	Line-line Res. @ 25°C	2.24 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	34°C
S.F. Amps		Temp. Rise @ S.F. Load	42°C
		Locked-rotor Power Factor	45
		Rotor inertia	0.205 LB-FT ²

Load Characteristics 575 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	65	84	90	91	93	93	92
Efficiency	87.9	91.3	91.6	90.9	89.9	88.6	90.3
Speed	3570	3542	3511	3478	3446	3412	3459
Line amperes	2.5	3.7	5.1	6.7	8.2	9.9	7.6


ABB Motors and Mechanical Inc.


WINDING # 36WGX579

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 3500 RPM 575 V 3646M

TORQUES (LB-FT) : PO=55 PU=40 LR=48 LRA=70

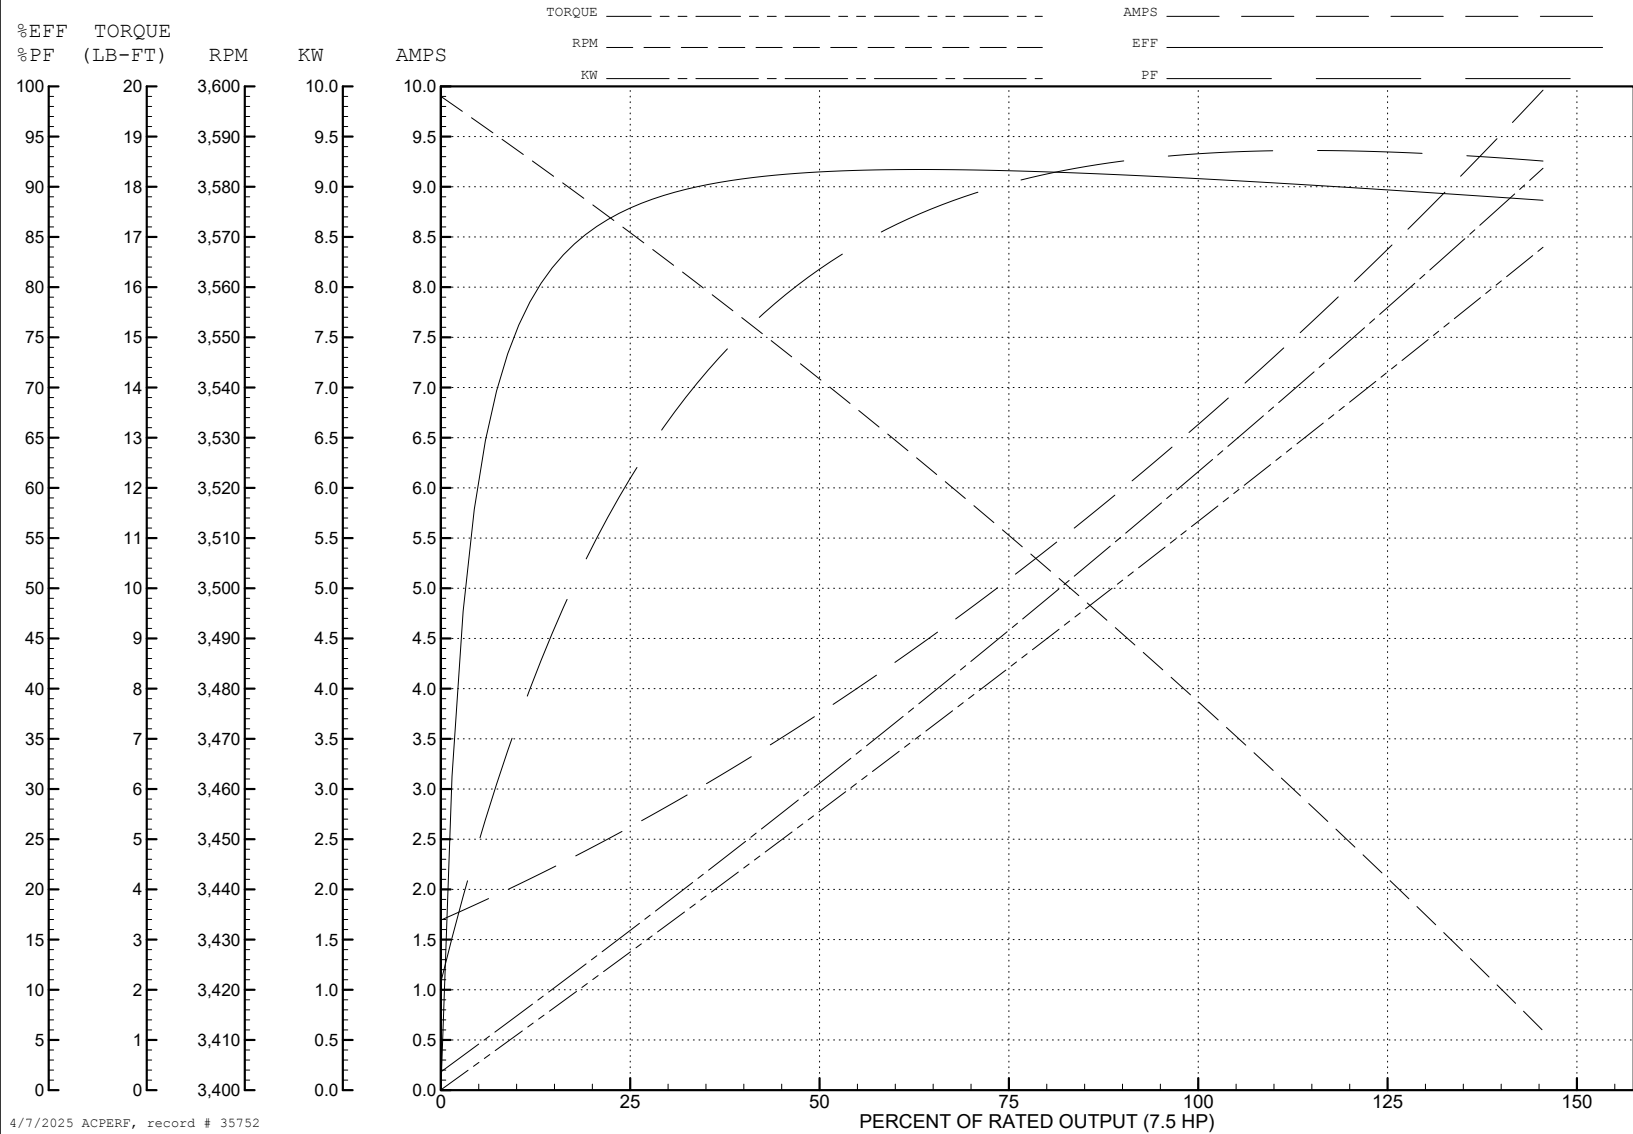

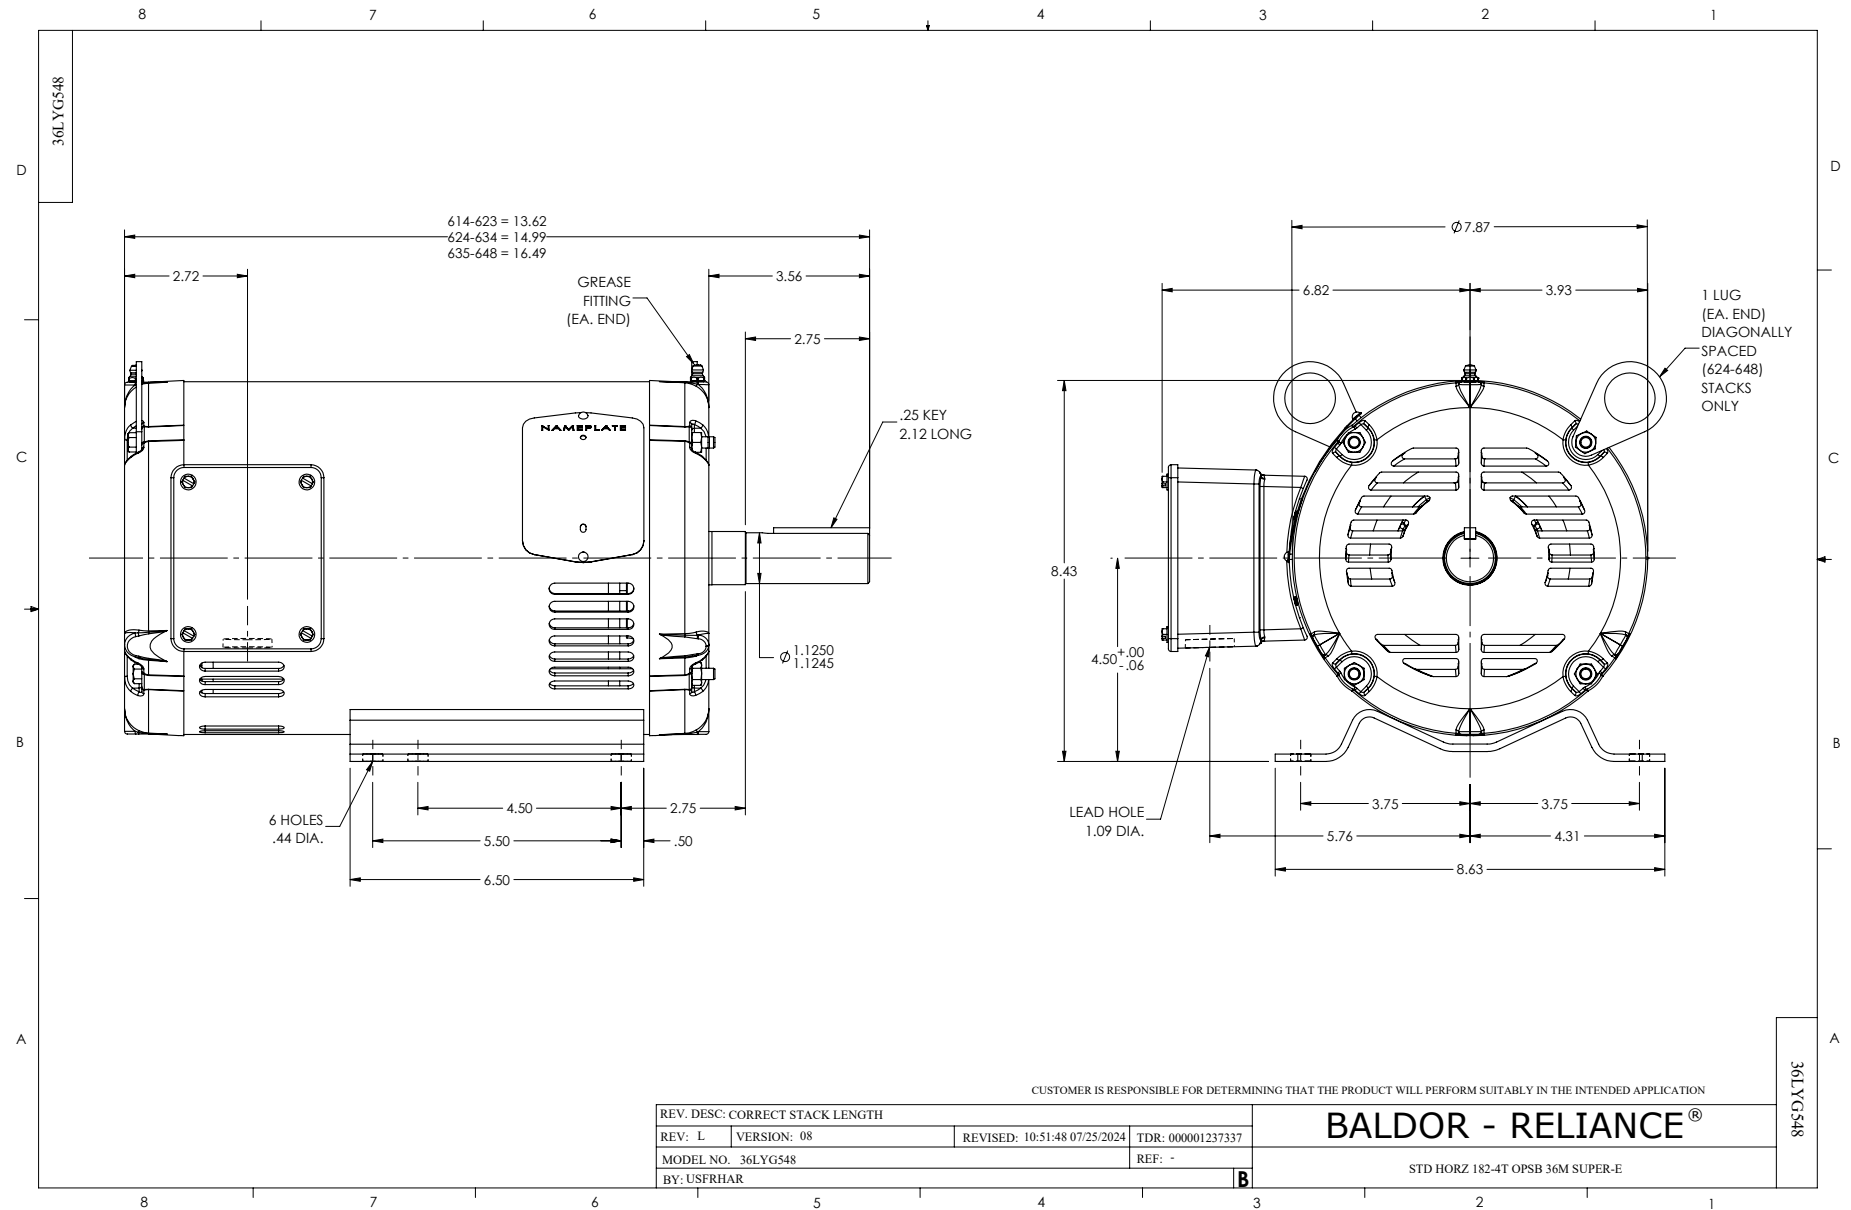

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1