



Select and order double reduction reducers with model number. Refer to page 112 for Model Number System.

SIZES 821, 824, 826 • 1.0 S.F.

Overall Ratio	Input RPM	Output RPM	SIZE 821			SIZE 824			SIZE 826		
			Input HP	Output HP	Output TQ (lb-in)	Input HP	Output HP	Output TQ (lb-in)	Input HP	Output HP	Output TQ (lb-in)
75	1750	23.30	0.631	0.455	1230	0.979	0.707	1910	1.226	0.911	2461
	1170	15.60	0.451	0.313	1266	0.702	0.489	1975	0.872	0.629	2540
100	1750	17.50	0.537	0.365	1315	0.829	0.567	2041	1.048	0.736	2649
	1170	11.70	0.384	0.251	1352	0.597	0.392	2109	0.755	0.508	2739
150	1750	11.70	0.366	0.238	1284	0.572	0.373	2010	0.753	0.509	2740
	1170	7.80	0.253	0.161	1303	0.397	0.253	2045	0.532	0.347	2803
200	1750	8.75	0.305	0.190	1372	0.478	0.298	2145	0.602	0.387	2787
	1170	5.85	0.216	0.129	1392	0.339	0.203	2182	0.426	0.263	2835
250	1750	7.00	0.252	0.151	1363	0.405	0.240	2160	0.501	0.309	2779
	1170	4.68	0.180	0.103	1381	1.276	0.164	2195	0.356	0.211	2824
300	1750	5.83	0.222	0.128	1392	0.346	0.201	2182	0.436	0.261	2835
	1170	3.90	0.158	0.087	1405	0.248	0.137	2207	0.312	0.177	2868
400	1750	4.38	0.179	0.098	1402	0.280	0.154	2201	0.353	0.200	2860
	1170	2.93	0.126	0.065	1412	0.197	0.102	2220	0.249	0.133	2885
500	1750	3.50	0.154	0.078	1408	0.241	0.123	2212	0.303	0.160	2875
	1170	2.34	0.108	0.052	1416	0.169	0.081	2227	0.215	0.106	2895
600	1750	2.92	0.134	0.065	1412	0.213	0.101	2205	0.253	0.127	2752
	1170	1.95	0.098	0.044	1419	0.154	0.069	2224	0.171	0.079	2568
750	1750	2.33	0.114	0.051	1409	0.181	0.081	2217	0.219	0.105	2871
	1170	1.56	0.087	0.036	1417	0.137	0.057	2232	0.166	0.073	2887
900	1750	1.94	0.100	0.043	1413	0.159	0.067	2224	0.189	0.086	2848
	1170	1.30	0.076	0.029	1420	0.118	0.046	2237	0.141	0.059	2863
1000	1750	1.75	0.099	0.041	1420	0.152	0.062	2175	0.156	0.066	2309
	1170	1.17	0.072	0.027	1424	0.099	0.038	1989	0.050	0.040	2107
1200	1750	1.46	0.088	0.034	1418	0.139	0.053	2234	0.125	0.048	2029
	1170	0.975	0.061	0.022	1423	0.100	0.035	2244	0.081	0.029	1882
1500	1750	1.17	0.076	0.027	1421	0.119	0.043	2240	0.113	0.042	2209
	1170	0.780	0.056	0.018	1426	0.087	0.029	2248	0.077	0.026	2044
1800	1750	0.972	0.068	0.023	1424	0.111	0.036	2244	0.107	0.038	2365
	1170	0.650	0.053	0.016	1427	0.085	0.025	2250	0.075	0.024	2184
2400	1750	0.729	0.056	0.016	1425	0.087	0.025	2244	0.096	0.028	2563
	1170	0.488	0.043	0.011	1429	0.069	0.018	2250	0.070	0.019	2336
3000	1750	0.583	0.053	0.013	1381	0.080	0.021	2206	0.091	0.026	2691
	1170	0.390	0.040	0.009	1384	0.057	0.014	2212	0.061	0.016	2456
3600	1750	0.486	0.048	0.011	1378	0.064	0.017	2090	0.084	0.022	2741
	1170	0.325	0.034	0.007	1381	0.042	0.010	2095	0.055	0.013	2748

* Actual ratio combinations supplied by Factory may vary from above depending on application and manufacturing requirements. Refer to page 131 for exact ratio of worm gear primary stage and worm gear secondary stage. At speeds above 1750 input RPM, gear reducers may become thermally limited. For continuous operation, limit input HP to 1750 RPM input ratings shown. Contact Factory with application requirements if higher speeds are required.


For input/ output shaft overhung load and thrust load ratings, refer to pages 419-422.




GR Series Dimensions Styles: DMQ, DM, D

**CAST IRON
GR SERIES**


Style DMQ

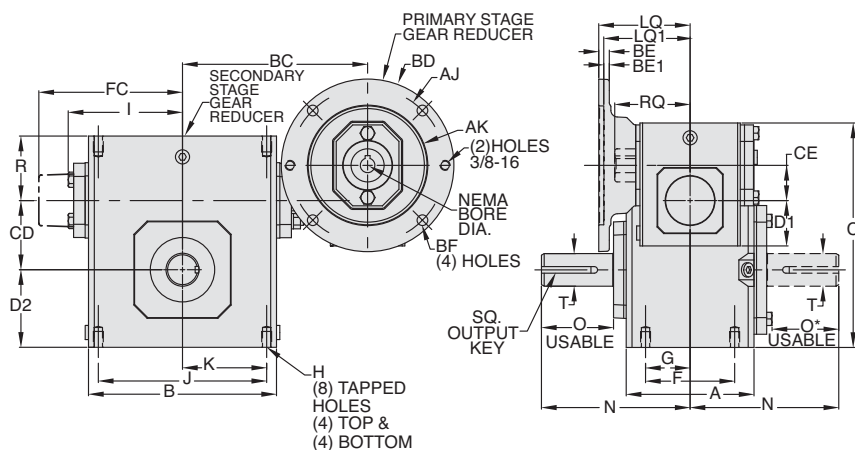


ASSEMBLIES

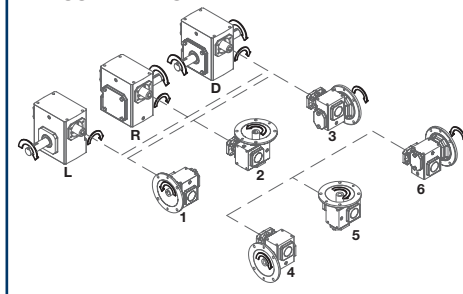


Style DM

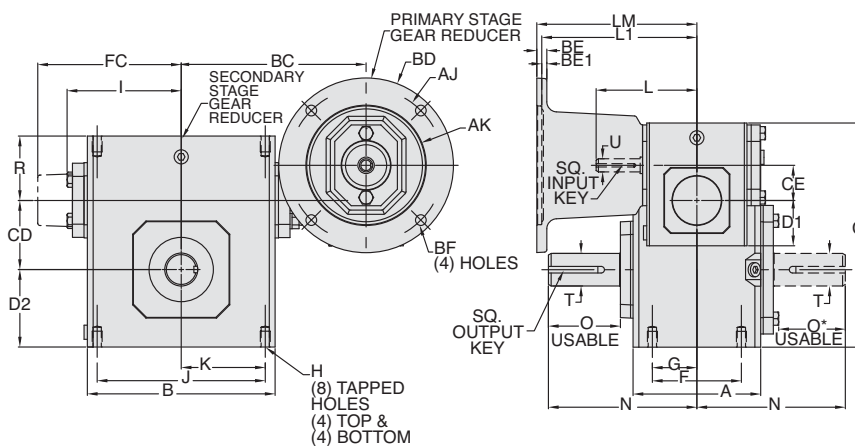


ASSEMBLIES

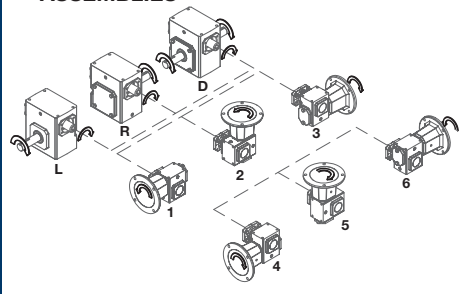

Style D

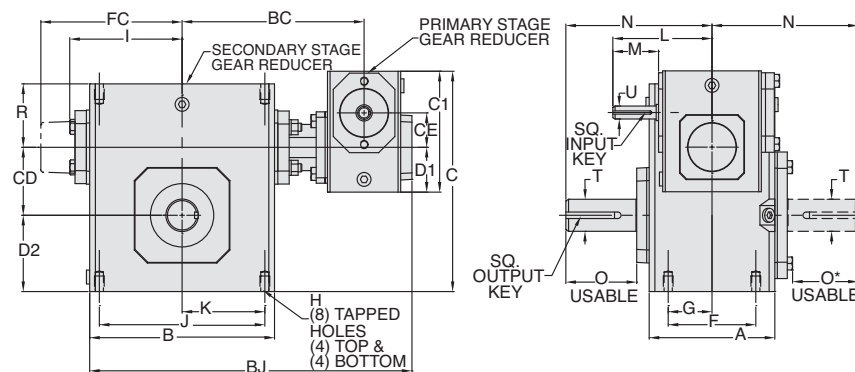

ASSEMBLIES

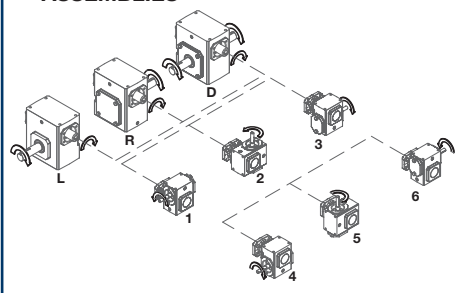

REVERSE ALL ARROWS FOR OPPOSITE INPUT SHAFT ROTATION.
CONTACT FACTORY FOR OTHER MOUNTINGS OR ASSEMBLY POSITIONS.



GR Series Dimensions

Styles: DMQ, DM, D



STYLE DMQ, DM, D DIMENSIONS (Inches)

Size	A	B	BC	BJ	C	CD	CE	C1	D1	D2	F	FC▼	G	H		I	J	K	L	M	N	O	O*	R	T +0.000 -0.0015	U +0.000 -0.0015	Input Key*	Output Key
														Tap Size	Depth													
GR813	2.82	3.80	5.32	9.06	5.99	1.33	1.33	4.66	1.72	1.72	2.00	N/A	1.00	5/16-18 UNC	.50	2.61	3.25	1.63	3.82	1.76	4.00	2.16	1.94	1.61	.625	0.500	1/8 x 1.00	3/16 X 1.50
GR815	3.44	4.88	5.85	10.13	6.38	1.54	1.33	4.66	1.72	1.91	2.75	N/A	1.38	5/16-18 UNC	.63	3.14	4.19	2.09	3.82	1.76	4.31	2.11	1.90	1.93	.750	0.500	1/8 x 1.00	3/16 X 1.50
GR818	3.56	5.06	5.94	10.32	6.75	1.75	1.33	4.66	1.72	2.06	2.75	N/A	1.38	5/16-18 UNC	.63	3.24	4.19	2.09	3.82	1.76	4.31	2.05	1.84	1.94	.875	0.500	1/8 x 1.00	3/16 X 1.38
GR821	3.81	5.80	6.32	11.06	7.28	2.06	1.33	4.66	1.72	2.28	▲	N/A	1.44	3/8-16 UNC	.63	3.61	▲	2.50	3.82	1.76	4.68	2.29	2.08	2.03	1.000	0.500	1/8 x 1.00	1/4 X 1.44
GR824	4.06	6.12	6.44	11.35	7.81	2.38	1.33	4.66	1.72	2.50	2.88	N/A	1.44	3/8-16 UNC	.69	3.77	5.00	2.50	3.82	1.76	5.14	2.66	2.44	2.06	1.125	0.500	1/8 x 1.00	1/4 X 1.75
GR826	4.84	7.12	7.01	12.41	8.50	2.63	1.33	4.66	1.72	2.94	3.38	N/A	1.69	3/8-16 UNC	.69	4.34	6.38	3.19	3.82	1.76	5.63	2.73	2.52	2.44	▲	0.500	1/8 x 1.00	1/4 X 1.75
GR830	5.25	8.12	7.86	14.12	9.94	3.00	1.75	5.38	2.06	3.25	4.00	N/A	2.00	7/16-14 UNC	.88	4.84	7.00	3.50	4.45	1.76	6.75	3.60	3.36	2.63	1.250	0.625	3/16 x 1.38	1/4 X 1.75
GR832	5.75	8.50	8.05	14.50	10.44	3.25	1.75	5.38	2.06	3.50	4.00	N/A	2.00	7/16-14 UNC	.88	5.02	7.50	3.75	4.45	1.76	7.06	3.66	3.42	2.63	▲	0.625	3/16 x 1.38	3/8 X 2.25
GR842	6.13	10.25	9.18	16.69	12.78	4.25	2.06	6.38	2.28	4.44	5.00	N/A	2.50	5/8-11 UNC	1.00	6.10	8.50	4.25	4.82	1.76	8.12	4.50	4.21	2.69	1.875	0.625	3/16 x 1.38	1/2 X 3.06
GR852	7.19	13.00	11.57	20.97	15.43	5.25	2.63	8.00	2.94	5.12	5.81	N/A	2.91	5/8-11 UNC	1.25	7.50	11.00	5.50	6.07	2.38	9.06	4.78	4.53	3.63	2.000	0.750	3/16 x 1.63	1/2 X 3.50
GR860	8.13	14.25	13.30	23.82	18.38	6.00	3.25	9.38	3.50	6.50	6.38	10.24	3.19	5/8-11 UNC	1.00	N/A	12.75	6.38	6.76	2.38	10.00	4.65	4.65	4.00	2.500	0.875	3/16 x 1.63	5/8 X 4.00
GR870	7.63	14.88	12.96	24.33	20.46	7.00	3.25	9.38	3.50	7.59	5.50	10.63	2.75	1-8 UNC	1.56	N/A	12.50	6.25	6.76	2.38	11.76	5.65	5.65	4.33	2.750	0.875	3/16 x 1.75..	5/8 x 4.00..
GR880	8.63	17.00	13.94	26.69	23.79	8.00	4.25	11.38	4.44	8.86	6.50	11.93	3.25	1-8 UNC	1.66	N/A	14.25	7.13	9.57	3.47	12.25	5.98	5.98	4.11	3.000	1.250	1/4 X 2.88..	3/4 x 4.50..
GR8100	9.53	20.88	17.05	32.74	29.24	10.00	5.25	14.00	5.12	10.36	6.88	14.34	3.44	1-1/4 -7 UNC	2.04	N/A	17.75	8.88	10.88	3.38	14.75	6.76	6.76	5.12	3.750	1.250	1/4 X 3.00..	7/8 x 5.00..

▲ See feature comparison chart.

FEATURE COMPARISON (821, 826, 832)

Size	Output Shaft Diameter Needed?	Mounting Footprint Needed?	Output Key Needed?	All Other Features	Grove Gear Flexaline Interchange	LEESON IRONMAN Interchange	Replace With Series Code Below:
821	Identical	(F)3.00" x (J)4.75"	Identical	Identical	✓	✓	GRG
		(F)2.88" x (J)5.00"					GRL
826	1.250"	Identical	Identical	Identical	✓	✓	GRG
	1.125"						GRL
832	1.500"	Identical	3/8 x 2.63	Identical	✓	✓	GRG
	1.375"		5/16 x 2.63				GRL

Motor Mounting Dimensions

NEMA DIMENSIONS (Inches)

Size	LM		L1	250TC	LQ	LQ1			48CZ/ 56C/140TC	RQ		
	48CZ	56C/ 140TC			180TC/ 210TC	48CZ/ 56C/140TC	180TC	210TC		250TC	180TC	210TC
GR813	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR815	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR818	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR821*	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR824	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR826*	5.63	6.07	N/A	N/A	3.46	N/A	N/A	N/A	3.09	N/A	N/A	N/A
GR830	6.26	6.70	N/A	N/A	4.09	N/A	N/A	N/A	3.59	N/A	N/A	N/A
GR832*	6.26	6.70	N/A	N/A	4.09	N/A	N/A	N/A	3.59	N/A	N/A	N/A
GR842	6.63	7.07	N/A	N/A	4.46	N/A	N/A	N/A	4.06	N/A	N/A	N/A
GR852	N/A	8.32	9.32	N/A	5.19■	5.62	N/A	N/A	4.82■	5.13	N/A	N/A
GR860	N/A	9.01	10.01	N/A	6.14■	6.34	6.75	N/A	5.51■	5.81	6.25	N/A
GR870	N/A	9.01	10.01	N/A	6.14■	6.34	6.75	N/A	5.51■	5.81	6.25	N/A
GR880	N/A	11.81	12.90	13.46	6.45■	7.21	7.21	7.77	6.04■	6.68	6.68	7.24
GR8100	N/A	13.21	14.30	14.86	7.85■	8.61	8.61	9.17	7.35■	7.98	7.98	8.54

IEC B5 & B3/B5 METRIC DIMENSIONS (Inches)*

Size	LQ1					RQ						
	D63D	D71D	D80D	D90D	D100LD/ D112MD	D132D	D63D	D71D	D80D	D90D	D100LD/ D112MD	D132D
GR813	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR815	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR818	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR821*	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR824	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR826*	2.62	2.65	2.89	N/A	N/A	N/A	2.45	2.47	2.71	N/A	N/A	N/A
GR830	3.25	3.28	3.52	N/A	N/A	N/A	2.95	2.97	3.21	N/A	N/A	N/A
GR832*	3.25	3.28	3.52	N/A	N/A	N/A	2.95	2.97	3.21	N/A	N/A	N/A
GR842	3.62	3.65	3.89	N/A	N/A	N/A	3.43	3.44	3.68	N/A	N/A	N/A
GR852	N/A	4.28	4.90	4.90	5.30	N/A	N/A	4.09	4.72	4.72	5.07	N/A
GR860	N/A	4.97	5.59	5.59	6.07	N/A	N/A	4.78	5.41	5.41	5.76	N/A
GR870	N/A	4.97	5.59	5.59	6.07	N/A	N/A	4.78	5.41	5.41	5.76	N/A
GR880	N/A	N/A	N/A	6.38	6.39	7.17	N/A	N/A	N/A	6.16	6.14	6.93
GR8100	N/A	N/A	N/A	7.78	7.78	8.57	N/A	N/A	N/A	7.46	7.45	8.24

* Applies to double output shaft

** Key not provided with gear reducer. Keyway dimension shown.

◆ Keyway width by depth

■ 48CZ not available

* Style D and DM only.

◆ Metric IEC B5 input flange options are available only on quill input styles.

* Dimensions same for GRG and GRL Series

▼ Sizes 860-8100 have extended cap. Dimensions refer to cap location.



For safety, purchaser or user should provide protective guards over shaft extensions and any couplings, sheaves and belts, sprockets and chains, etc., mounted thereon.

Single Reduction
Worm Gear Reducers

Double Reduction
Worm - Worm Gear Reducers

Double Reduction
Helical - Worm Gear Reducers

WASHGUARD® Reducers
and GEAR+MOTOR™

Ratio Multipliers

Accessories and
Additional Capabilities