

PN Gold Mounted Ball Bearings

SEALMASTER®



Duty: Standard

Housing: 316 Passivated Stainless Steel
Two Bolt Flange



Self-Alignment: +/- 2 Degrees

Lock: Skwezloc Locking Collar

Seal: HPS

Temperature: -20° to 220°F

Grease: Sealmaster GoldPlex-FG

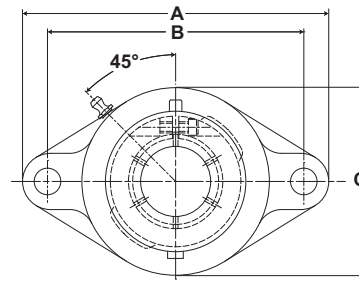

CRFS Bearings

CRFTS-PN-T Series 2 Bolt Flange Skwezloc Locking Collar

Bore Diameter		Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch/mm												Unit Wt. lb/kg	Open Cap	Closed Cap	Backside Shield
					A	B	C	D	G	H	J	L	N	P	T	Bolt Size				
3/4	-	CRFTS-PN12T	PN-12T	2611 11614	4 13/32 111.9	3 17/32 89.7	2 3/8 60.3	31/32 24.6	7/16 11.1	1 9/32 32.5	2 1/2 63.5	1 3/4 44.5	1/2 12.7	2 17/64 57.5	2 50.8	3/8	1.20 .54	ECO-12	ECC-12	2BSS-12
-	20	CRFTS-PN204T	PN-204T																	
1	-	CRFTS-PN16T	PN-16T	2801 12459	4 7/8 123.8	3 57/64 98.8	2 3/4 69.9	1 5/64 27.4	17/32 13.5	1 7/16 36.5	2 3/4 69.9	1 15/16 49.2	9/16 14.3	2 7/16 61.9	2 3/16 55.6	7/16	1.60 .73	ECO-16	ECC-16	2BSS-16
-	25	CRFTS-PN205T	PN-205T																	
1 3/16	-	CRFTS-PN19T	PN-19T	4381 19488	5 9/16 141.3	4 19/32 116.7	3 1/4 82.6	1 7/32 31.0	17/32 13.5	1 9/16 39.7	3 1/4 82.6	2 3/16 55.6	5/8 15.9	2 37/64 65.5	2 9/16 65.1	7/16	2.20 1.00	ECO-19	ECC-19	2BSS-19
1 1/4	-	CRFTS-PN20RT	PN-20RT															ECO-20R		2BSS-20R
-	30	CRFTS-PN206T	PN-206T															ECO-19		2BSS-19
1 1/4	-	CRFTS-PN20T	PN-20T	5782 25720	6 1/8 155.6	5 1/8 130.2	3 3/4 95.3	1 11/32 34.1	9/16 14.3	1 3/4 44.5	3 3/4 95.3	2 7/16 61.9	11/16 17.5	2 25/32 70.6	2 15/16 74.6	1/2	3.20 1.45	ECO-20	ECC-23	2BSS-20
1 3/8	-	CRFTS-PN22T	PN-22T	5782 25720	6 1/8 155.6	5 1/8 130.2	3 3/4 95.3	1 11/32 34.1	9/16 14.3	1 3/4 44.5	3 3/4 95.3	2 9/16 65.1	11/16 17.5	2 25/32 70.6	2 15/16 74.6	1/2	3.40 1.54	ECO-23	ECC-23	2BSS-22
1 7/16	-	CRFTS-PN23T	PN-23T																	2BSS-23
-	35	CRFTS-PN207T	PN-207T																	2BSS-22
1 1/2	-	CRFTS-PN24T	PN-24T	7340 32650	6 3/4 171.5	5 21/32 143.7	4 1/8 104.8	1 1/2 38.1	9/16 14.3	2 1/64 51.2	4 1/8 104.8	2 11/16 68.3	3/4 19.1	3 3/64 77.4	3 19/64 83.7	1/2	4.50 2.04	ECO-24	ECC-24	2BSS-24
-	40	CRFTS-PN208T	PN-208T																	2BSS-208
1 11/16	-	CRFTS-PN27T	PN-27T	7901 35145	7 1/16 179.4	5 27/32 148.4	4 3/8 111.1	1 9/16 39.7	9/16 14.3	2 3/64 52.0	4 3/8 111.1	2 15/16 74.6	3/4 19.1	3 5/64 78.2	3 7/8 98.4	9/16	5.00 2.27	ECO-27	ECC-27	2BSS-27
1 3/4	-	CRFTS-PN28T	PN-28T															N/A		N/A
-	45	CRFTS-PN209T	PN-209T															N/A		N/A
1 15/16	-	CRFTS-PN31T	PN-31T	7889 35092	7 7/16 188.9	6 3/16 157.2	4 9/16 115.9	1 9/16 39.7	9/16 14.3	2 5/32 54.8	4 9/16 115.9	3 3/8 85.7	3/4 19.1	3 5/64 78.2	4 101.6	9/16	6.70 3.04	ECO-31	ECC-31	2BSS-31
2	-	CRFTS-PN32RT	PN-32RT																	N/A
-	50	CRFTS-PN210T	PN-210T																	N/A
2	-	CRFTS-PN32T	PN-32T	9752 43379	8 1/2 215.9	7 1/4 184.2	5 1/4 133.4	1 3/4 44.5	13/16 20.6	2 5/16 58.7	5 1/4 133.4	3 1/2 88.9	7/8 22.2	3 27/64 86.9	4 1/4 108.0	5/8	8.40 3.81	ECO-35	ECC-35	N/A
2 3/16	-	CRFTS-PN35T	PN-35T	9752 43379	8 1/2 215.9	7 1/4 184.2	5 1/4 133.4	1 3/4 44.5	13/16 20.6	2 5/16 58.7	5 1/4 133.4	3 5/8 92.1	7/8 22.2	3 27/64 86.9	4 1/4 108.0	5/8	8.40 3.81	ECO-35	ECC-35	2BSS-35
-	55	CRFTS-PN211T	PN-211T																	

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.