

DR150 Standard Duty - 150 A


UL/CSA Ratings

- **Max Amperage & Voltage**
150 A, 600 VAC
- **Current Interruption Capability**
For current interrupting up to 250 VAC
 For Switch-Rated devices, see DS & DSN sections.
- **Short Circuit Rating**
65 kA
Testing was performed with RK1 current limiting fuses sized at at least 100% of the device's ampacity rating.
- **Environmental Ratings**
Type 4X/IP66/IP67/IP69/IP69K
- **Temperature Range**
Min -40°F/Max 140°F
See pg 254 for temperatures outside of this range.
- **Wiring Capacity**
Based on THHN wire sizes
Min 4 AWG Max 2/0 AWG
Aux Contacts - Max 14 AWG
- **Certifications**
UL 1682, CSA C22.2 NO. 182.1, NOM

Receptacle (female)



Inlet (male)

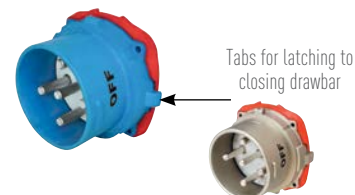

! Don't forget to add installation accessories to your order

North American UL/CSA Configurations

VOLTAGE	POLARITY	PART #		PART #	
		POLY	METAL	POLY	METAL
120 V	1P+N+G	31-94235-K16	39-94235-K16	31-98235-K16	39-98235-K16
120 208 V	3P+N+G	31-94237-K16	39-94237-K16	31-98237-K16	39-98237-K16
125 V	1P+N+G	31-94175-K07	39-94175-K07	31-98175-K07	39-98175-K07
125 250 V	2P+N+G	31-94176-K07	39-94176-K07	31-98176-K07	39-98176-K07
208 V	2P+G	31-94232-K16	39-94232-K16	31-98232-K16	39-98232-K16
208 V	3P+G	31-94233-K16	39-94233-K16	31-98233-K16	39-98233-K16
250 V	2P+G	31-94172-K07	39-94172-K07	31-98172-K07	39-98172-K07
250 V	3P+G	31-94173-K07	39-94173-K07	31-98173-K07	39-98173-K07
277 V	1P+N+G	31-94245-K04	39-94245-K04	31-98245-K04	39-98245-K04
277 480 V	3P+N+G	31-94247-K04	39-94247-K04	31-98247-K04	39-98247-K04
347 600 V	3P+N+G	31-94187-K14	39-94187-K14	31-98187-K14	39-98187-K14
480 V	2P+G	31-94242-K04	39-94242-K04	31-98242-K04	39-98242-K04
480 V	3P+G	31-94243-K04	39-94243-K04	31-98243-K04	39-98243-K04
600 V	2P+G	31-94182-K14	39-94182-K14	31-98182-K14	39-98182-K14
600 V	3P+G	31-94183-K14	39-94183-K14	31-98183-K14	39-98183-K14

For international configurations and ratings (IEC, CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

Main Options



RECEPTACLE OPTIONS

With 2 Auxiliary/Pilot Contacts	Recept # -262
With 4 Auxiliary/Pilot Contacts	Recept # -264
With 6 Auxiliary/Pilot Contacts	Recept # -976
Mushroom Pawl	Recept # -375
Padlock Pawl	Recept # -843
Screw-Type Locking Pawl	Recept # -845
Metal Pawl (on poly receptacle)	Recept # -824
Self-Returning Lid (Manual Close)	Recept # -NC
With Microswitch	Recept # -270^{3,4}

SUFFIX

INLET OPTIONS

With 2 Auxiliary/Pilot Contacts	Inlet # -262
With 4 Auxiliary/Pilot Contacts	Inlet # -264
With 6 Auxiliary/Pilot Contacts	Inlet # -976
Without Lockout Hole	Inlet # -A155
For Microswitch	Inlet # -270^{3,4}

Notes:

³ Not UL/CSA listed.

⁴ Not available on 3P+N+G configurations.

! See pages 231-240 for detailed information on these options

Order Example: 480 V DR150 + 2 auxiliary contacts
DR150 Poly inlet 3P+G = 31-98243-K04-972



INSTALLATION ACCESSORIES – SIZE 5

When properly installed, all accessories meet or exceed the environmental ratings of the devices they are mounted to; unless otherwise noted.

HANDLES

HANDLE WITH NPT		PART # POLY	PART # METAL
	3/4"	515P0N07	595P0N07
	1"	515P0N10	595P0N10
	1 1/4"	515P0N12	595P0N12
	1 1/2"	515P0N15	595P0N15
	2"	515P0N20	595P0N20

For available cord grips, see pg 159.

POLY HANDLE WITH CORD GRIP		CABLE RANGE	PART #
		.980-1.260"	715P0EP4
		1.260-1.560"	715P0FP1
		1.520-1.860"	715P0GP2

METAL HANDLE WITH CORD GRIP		CABLE RANGE	PART #
		1.250-1.375"	795P0FS1
		1.438-1.562"	795P0FS2*
		1.562-1.688"	795P0FS3*
		1.688-1.812"	795P0GS1
		*May require stripping of cable jacket.	

OVERSIZED METAL HANDLE WITH NPT		CABLE RANGE	PART #
	3/4"		795P0N07
	1"		795P0N10
	1 1/4"		795P0N12
	1 1/2"		795P0N15
	2"		795P0N20
	2 1/2"		795P0N25

For available cord grips, see pg 159.

SANTOPRENE HANDLE		CABLE RANGE	PART #
		.708-.984"	555P0D25
		.984-1.377"	555P0D35
		1.377-1.771"	555P0D45
		1.771-1.929"	555P0D49

ANGLES

POLY ANGLE		PART #
	30°	515M3

METAL ANGLE		PART #
	0°	595M0
	30°	595M3
	Oversized 30°	795M3
	70°	595M7


Mounts on oversize metal box only. Order with 7T6F0N25XL. See pg 100.

BOXES

POLY ANGLE WITH METAL BOX WITH NPT			PART #
	30°	1 1/4"	715C3N12
	30°	1 1/2"	715C3N15
	30°	2"	715C3N20
	30°	2 1/2"	715C3N25

* 108.7 in³

* Interior volume with receptacle installed.

METAL ANGLE WITH METAL BOX WITH NPT			PART #
	30°	1 1/4"	795C3N12
	30°	1 1/2"	795C3N15
	30°	2"	795C3N20
	30°	2 1/2"	795C3N25

* 111.8 in³

* Interior volume with receptacle installed.

METAL BOX WITH NPT			PART #
	0°	1 1/4"	7T5F0N12
	0°	1 1/2"	7T5F0N15
	0°	2"	7T5F0N20
	0°	2 1/2"	7T5F0N25

NPT on top or bottom (if rotated). For other configurations, contact Customer Service.

MISCELLANEOUS ACCESSORIES

PROTECTIVE INLET/PLUG CAP		PART #
		31-9A426

For Inlets/Plugs Only. Covers lockout hole for watertight seal on inlet. Consult Customer Service for availability.

PADLOCKABLE INLET/PLUG CAP		PART #
		DS9MC

Aluminum – For Inlets/Plugs Only. -A155 suffix required on inlet part # to retain water ingress protection.

CORD GRIP WITH OPTIONS		PART #
		see pg 159

EASY RETROFIT ADAPTER PLATES		PART #
		see pg 240

Mount to existing boxes.

RECEPTACLE LOCKING PIN		PART #
		LP-843

Requires Padlockable Pawl option (-843) on receptacle.