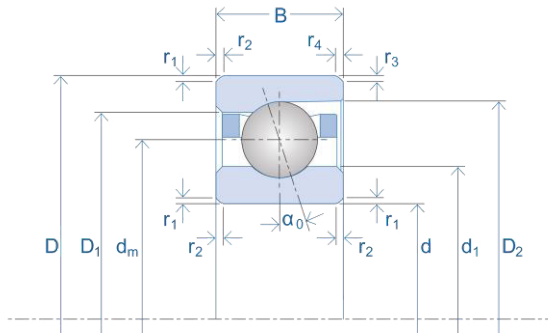


Part Number	HY SM 6005 C TA
Bearing Size	6005

Bearing Series	SM
Hybrid (Si ₃ N ₄ Balls)	Yes

Bearing Dimensions

Bore Diameter	d [mm]	25
Outer Diameter	D [mm]	47
Bearing Width	B [mm]	12
Pitch Circle	dm [mm]	36.0
Ball Diameter	Dw [mm]	6.35
OD Inner Ring	d1 [mm]	32.2
ID Outer Ring	D1 [mm]	40.1
ID Outer Ring (Open Side)	D2 [mm]	42.3
Chamfer	r1,2 [mm]	0.6
Chamfer (Open Side)	r3,4 [mm]	0.3

Geometrical Data

Number of Balls	Z [Qty.]	15
Contact Angle	α ₀ [°]	15
Bearing Weight	m [kg]	0.076

Mating Part Dimensions

Abutment Diameter Inner Ring	da min. [mm]	30.0
Abutment Diameter Outer Ring	Da max. [mm]	42.0
Chamfer Associated Component	ra max. [mm]	0.6
Chamfer Associated Component (Open Side)	rb max. [mm]	0.3

Bearing Load Ratings

Dynamic Radial Load Rating	C [N]	9,200
Static Radial Load Rating Steel Balls	C ₀ [N]	4,700
Static Radial Load Rating Si ₃ N ₄ balls	C ₀ HY [N]	3,300

Bearing RPM Ratings

Speed Value with Oil Lubrication	n _{oil} [1/min]	68,750
Speed Value with Grease Lubrication	n _{grease} [1/min]	51,250

Bearing Preload Data

Light Pre-Load	Fv [N]	50
Light Axial Rigidity	C _{ax} [N/μm]	28
Medium Pre-Load	Fv [N]	140
Medium Axial Rigidity	C _{ax} [N/μm]	43
Heavy Pre-Load	Fv [N]	280
Heavy Axial Rigidity	C _{ax} [N/μm]	59
Minimum Spring Pre-Load	F _r [N]	280

Notes:

1. Position of the oiling Nozzle (d_r) for bearings with TA cage/ TXM cage upon request
2. The stated load and speed values are given for a spring preloaded single bearing with oil/air or oil mist lubrication. If specific applications differ, please consult correction factors and/or GMN USA engineers.