



Weight: 0.6 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Voltage	Watts	N/A
120V	N/A	Color Temp	N/A
208V	N/A	Color Accuracy	N/A
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	N/A
Input Watts	N/A	Efficacy	N/A

Technical Specifications

Performance

Product Type:
LED Tape Light Linear Driver Damp Rated

Description:
Versatile driver with high-performance dimming on ELV, TRIAC, and 0-10V dimming system that allows for dim-to-dark

L70 Lifespan:
50,000-Hour LED lifespan based on IES LM-70 results

Electrical
Power Factor:
0.95

Dimmable:
Yes, dimmable down to 0.1% on compatible TRIAC/ELV or 0-10V dimming systems. See Dimmer Compatibility List.

Input Voltage:
DC24V

Output Power:
60W Max

Output Voltage:
24VDC

Output Current:
2.5A

Operating Frequency:
47-63Hz

Operating Temperature:
-4°F to 113°F (-20°C to 45°C)

Construction
Material Construction:
Dedicated line voltage and low-voltage wiring compartments. Multiple 7/8" knock-outs for easy wire configuration.

Compliance
Listings:
UL Listed

Environment:
Suitable for use indoors in dry and damp environments.

IP Rating:
IP20

California Title 24 JA8 Compliant:
Can be used to conform with the requirements of California Title 24 Part 6.


California Energy Commission (CEC) Status:
Lawful for Sales in California

RoHS:
Mercury and UV free. RoHS-compliant components.

FCC:
Complies with Part 15 of the FCC Rules

Other
Compatible Products:
Compatible with the following ARCTAPE products: TICYY, TICY, TICYN, TICN, TICCW, TICLYY, TICLY, TICLYN, TICLN, TICLCW, TICHYY, TICHY, TICHYN, TICHN, TICHCW, TIC/DW

Dimensions

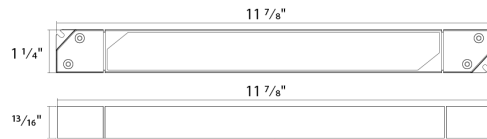

Features

- 120-277V Universal input voltage
- Phase dimmable, TRIAC/ELV
- 0.1% Performance dimming, dim-to-dark>Indoor Rated
- UL Listed and Title 24 JA8 Compliant
- 5-year limited warranty