



5C series - 395 series

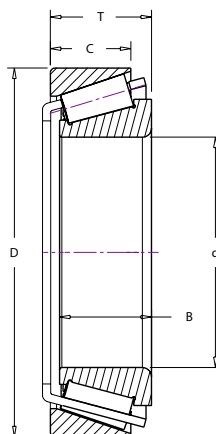

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
5C series 4A	0.7500	0.4688	0.06	0.12	6	1.7500	0.3750	0.06	0.08	0.5000	
335 series 342A	1.6250	1.1802	0.14	0.87	332	3.1496	0.7018	0.05	0.32	0.8268	
355 series 355	1.7500	0.8540	0.09	0.81	354A	3.3465	0.6875	0.05	0.40	0.8124	
365 series 366	1.9685	0.8750	0.09	0.77	362	3.5433	0.6250	0.08	0.38	0.7874	368: Frontface Chamfer
368	2.0000	0.8750	0.06	0.75	362A	3.5000	0.6501	0.05	0.36	0.8125	
368S	2.0312	0.8750	0.08	0.77							
368A	2.0000	0.8750	0.14	0.74							
385 series 385	2.1654	0.8640	0.09	0.97	382	3.8750	0.7018	0.03	0.49	0.8268	384D: Groove/Holes in OD center
385A	2.0000	0.8640	0.09	1.10	382A	3.8125	0.6250	0.03	0.39	0.8268	
386A	1.8750	0.8640	0.03	1.20	382S	3.8125	0.7982	0.09	0.53	1.0000	
387	2.2500	0.8640	0.09	0.90	383A	3.9370	0.7018	0.08	0.56	0.8268	
387A	2.2500	0.8640	0.14	0.89	384D	3.9370	1.6875	0.03	1.49	2.0625	
387AS	2.2500	0.8640	0.20	0.86							
387S	2.2500	0.8640	0.03	0.95							
388A	2.2650	0.8640	0.14	0.87							
395 series 390	2.2500	0.8660	0.09	1.60	394A	4.3307	0.7411	0.05	0.58	0.8661	
390A	2.5000	0.8660	0.06	1.30	394AS	4.3307	0.7411	0.13	0.66	0.8661	
395	2.5000	0.8660	0.14	1.30	3920	4.4375	0.9375	0.13	0.98	1.0617	
395A	2.6250	0.8660	0.03	1.20							
395S	2.6250	0.8660	0.14	1.20							
399A	2.6875	0.8660	0.09	1.18							
399AS	2.6875	0.8660	0.20	1.20							

All dimensions listed in inches unless otherwise noted.


455 series - 565 series

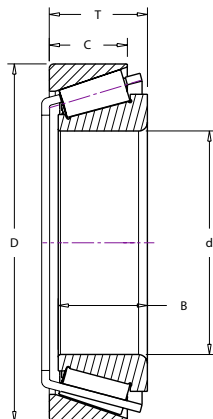

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
455 series											
455	2.0000	1.1542	0.03	1.78	453A	4.2500	0.8750	0.03	0.93	1.0938	
460	1.7500	1.1542	0.14	2.01	453X	4.1250	0.9687	0.13	0.81	1.1875	
462	2.2500	1.1542	0.09	1.50							
469	2.2500	1.1542	0.14	1.49							
475 series					472	4.7244	0.9542	0.08	1.10	1.1730	
495 series											
495	3.2500	1.1720	0.14	2.37	492A	5.2500	0.8750	0.13	0.93	1.1875	
495A	3.0000	1.1720	0.14	2.78	493	5.3750	0.8750	0.13	1.18	1.1875	
496	3.1875	1.1720	0.14	2.47							
497	3.3750	1.1720	0.14	2.15							
498	3.3125	1.1720	0.14	2.26							
525 series											
527	1.7500	1.4200	0.14	2.17	522	4.0000	1.0625	0.13	1.03	1.3750	
529	2.0000	1.4200	0.03	1.91							
535 series					532X	4.2500	1.1250	0.13	1.33	1.4376	
555 series											Groove/Holes in OD center
554	2.4375	1.4440	0.14	2.69	552A	4.8750	1.1875	0.13	1.65	1.5000	
555S	2.2500	1.4440	0.14	3.09	552D	4.8750	2.5000	0.06	3.49	3.1250	
557S	2.1250	1.4440	0.14	3.27							
559	2.5000	1.4440	0.14	2.71							
560	2.6250	1.4440	0.14	2.50							
565 series											
565	2.5000	1.4240	0.14	3.18	563	5.0000	1.1250	0.13	1.42	1.4375	
566	2.7500	1.4240	0.14	2.76							
567	2.8750	1.4240	0.14	2.54							

All dimensions listed in inches unless otherwise noted.


575 series - 755 series

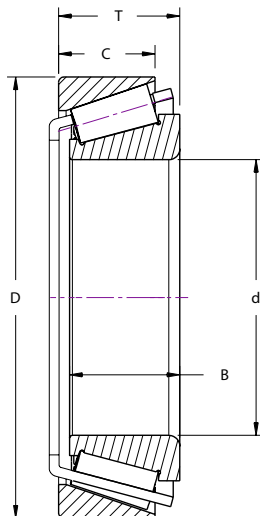

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
575 series											
575	3.0000	1.4212	0.14	3.52	572	5.5115	1.1250	0.13	1.70	1.4375	
580	3.2500	1.4212	0.14	3.02							
581	3.1875	1.4212	0.14	3.15							
595 series											
593	3.5000	1.4300	0.14	3.76	592	6.0000	1.3125	0.13	2.60	1.5625	
593A	3.5000	1.4300	0.25	3.83	592A	6.0000	1.1875	0.13	2.29	1.5625	
594	3.7500	1.4300	0.14	3.18							
594A	3.7500	1.4300	0.20	3.14							
596	3.3750	1.4300	0.14	4.20							
598	3.6250	1.4300	0.14	3.60							
635 series											
639	2.5000	1.6250	0.14	3.95	632	5.3750	1.2500	3.30	2.30	1.6250	
643	2.7500	1.6250	0.14	3.58	633	5.1250	1.2500	0.13	1.71	1.6250	
655 series											
663	3.2500	1.6250	0.14	4.14	652	6.0000	1.2500	0.13	2.76	1.6250	
665	3.3750	1.6250	0.14	3.84	653	5.7500	1.2500	0.13	1.92	1.6250	
675 series											
687	4.0000	1.6250	3.50	4.72	672	6.6250	1.1875	0.13	2.69	1.6250	
745 series											
740	3.1875	1.8375	0.20	5.15	742	5.9090	1.4375	0.13	2.35	1.7500	
744	2.8750	1.8375	0.14	6.05							
749	3.3475	1.8375	0.14	4.78							
755 series											
759	3.5000	1.9000	0.14	5.44	752	6.3750	1.5000	0.13	3.51	1.8750	

All dimensions listed in inches unless otherwise noted.


775 series - 2700 series

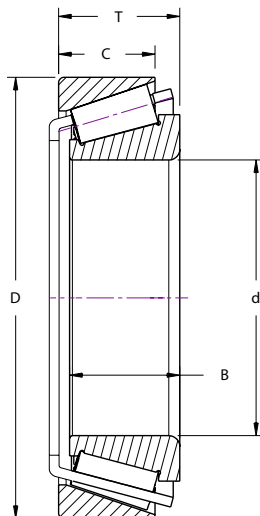

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
775 series											
782	4.1250	1.8900	0.14	6.42	772	7.1250	1.5000	0.13	4.24	1.8750	
795 series											
795	4.7500	1.8750	0.13	9.80	792	8.1250	1.3750	0.13	4.18	1.8750	
855 series											
864	3.7500	2.2650	0.31	10.14	854	7.5000	1.7500	0.13	5.85	2.2500	
895 series											
896	5.3750	2.2500	0.14	13.2	892	9.0000	1.7500	0.13	6.85	2.2500	
935 series											
938	4.5000	2.6250	0.28	12.73	932	8.3750	2.1250	0.13	8.98	2.6250	
1200 series											
1280	0.8750	0.8750	0.03	0.40							
1700 series											
1779	0.9375	0.7810	0.03	0.34	1729	2.2400	0.6250	0.05	0.22	0.7625	
1900 series											
1986	1.0000	0.7620	0.05	0.36	1922	2.2500	0.6250	0.06	0.17	0.7813	
1988	1.1250	0.7620	0.14	0.31							
2500 series											
2580	1.2500	0.9883	0.03	0.63	2520	2.6125	0.8125	0.13	0.26	1.0000	
2585	1.3125	0.9983	0.14	0.58	2523	2.7500	0.7500	0.05	0.37	0.9375	
2600 series											
					2631	2.6150	0.7500	0.05	0.40	0.9375	
2700 series											
					2735X	2.8750	0.7500	0.03	0.29	0.9361	
2700 series											
2788	1.5000	1.0100	0.14	0.73	2720	3.0000	0.7500	0.13	0.40	0.9360	
2789	1.5625	1.0100	0.14	0.67	2729	3.0000	0.7500	0.03	0.42	0.9360	
2790	1.3125	1.0100	0.06	0.85							
2793	1.3750	1.0100	0.03	0.82							
2796	1.3750	1.0100	0.14	0.78							

All dimensions listed in inches unless otherwise noted.


2900 series - 3800 series

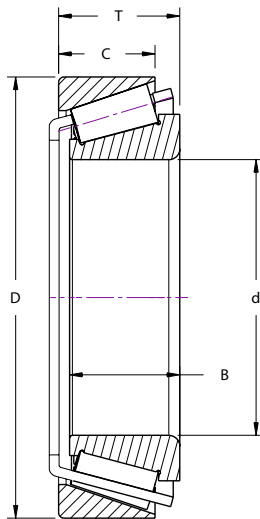

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
2900 series											
2984	1.8125	1.0082	0.14	0.87	2924	3.3465	0.8125	0.05	0.48	1.0000	
3100 series					3120	2.8593	0.9375	0.13	0.50	1.1875	
3300 series					3320	3.1562	0.9375	0.13	0.46	1.1563	
3381	1.5000	1.1965	0.14	1.03							
3379	1.3750	1.1965	0.14	1.17							
3382	1.5625	1.1965	0.14	0.98							
3400 series					3420	3.1250	0.9375	0.13	0.56	1.1563	3490: Frontface chamfer
3490	1.5000	1.1721	0.14	0.89							
3500 series					3520	3.3125	0.9375	0.13	0.58	1.1875	
3578	1.7500	1.2160	0.14	1.05	3525	3.4375	0.9375	0.13	0.65	1.1875	
3585	1.6250	1.2160	0.06	1.17							
3700 series					3720	3.6718	0.9375	0.13	0.62	1.1875	
3767	2.0625	1.1930	0.09	1.18	3730	3.6718	0.9375	0.03	0.60	1.1876	
3775	2.0000	1.1930	0.03	1.29							
3780	2.0000	1.1930	0.14	1.23							
3782	1.7500	1.1930	0.14	1.48							
3800 series					3820	3.3750	0.9375	0.13	0.61	1.1875	
3872	1.3750	1.1875	0.14	1.41							
3877	1.6250	1.1875	0.14	1.21							

All dimensions listed in inches unless otherwise noted.


3900 series - 02400 series

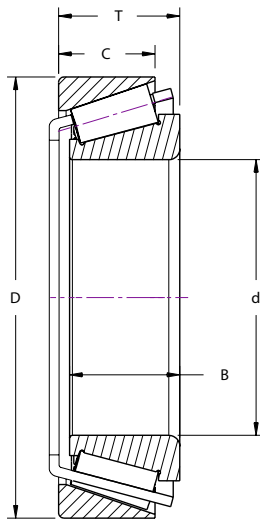

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
3900 series					3920	4.4375	0.9375	0.13	0.98	1.1875	
3975	2.0000	1.1830	0.14	2.31							
3980	2.3750	1.1830	0.14	1.88							
3982	2.5000	1.1830	0.14	1.72							
3984	2.6250	1.1830	0.14	1.55							
3994	2.6250	1.1830	0.22	1.55							
A4000 series					A4138	1.3775	0.3437	0.05	0.05	0.4330	
A4050	0.5000	0.4326	0.05	0.08							
4500 series					4535	4.1250	1.3125	0.13	1.38	1.5625	
A6000 series					A6157	1.5745	0.3750	0.05	0.07	0.4730	
A6075	0.7500	0.4391	0.04	0.08							
6400 series					6420	5.8750	1.7500	0.13	3.56	2.1250	
6461	3.0000	2.1350	0.14	6.10							
6461A	3.0000	2.1350	0.38	6.10							
6500 series					6535	6.3750	1.6875	0.13	3.64	2.1250	
6580	3.5000	2.1693	0.14	6.65							
9200 series					9220	6.3750	1.2500	0.13	3.03	1.9375	
9285	3.0000	1.1825	0.14	6.49							
02400 series					02420	2.6875	0.6875	0.06	0.33	0.8750	
02474	1.1250	0.8750	0.03	0.56							
02475	1.2500	0.8750	0.14	0.49							

All dimensions listed in inches unless otherwise noted.


02800 series - LM11900 series

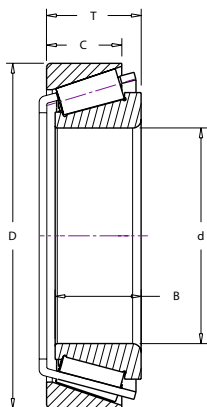

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
02800 series											
02872	1.1250	0.8750	0.03	0.72	02820	2.8750	0.6875	0.13	0.34	0.8750	
02875	1.2500	0.6875	0.03	0.64							
02877	1.3750	0.8750	0.03	0.60							
03000 series											
03062	0.6250	0.5780	0.05	0.22	03162	1.6250	0.4375	0.08	0.08	0.5625	
05000 series											
05066	0.6690	0.5662	0.06	0.18	05185	1.8504	0.4375	0.05	0.12	0.5662	
07000 series											
07097	0.9843	0.5614	0.06	0.20	07196	1.9687	0.3750	0.04	0.08	0.5313	
07100	1.0000	0.5614	0.04	0.18	07204	2.0470	0.5000	0.05	0.13	0.5910	
08000 series											
08125	1.2500	0.5937	0.04	0.24	08231	2.3125	0.4219	0.04	0.12	0.5781	
09000 series											
09067	0.7500	0.7500	0.05	0.24	09195	1.9380	0.5625	0.05	0.14	0.7813	09074: BACKFACE CHAMFER
09074	0.7500	0.8484	spcl.	0.26	09196	1.9380	0.6875	0.06	0.18	0.9063	
09078	0.7500	0.8480	0.05	0.26							
09081	0.8120	0.8480	0.06	0.24							
11500 series											
11590	0.6250	0.5625	0.06	0.13	11520	1.6875	0.3750	0.06	0.09	0.5625	
LM11700 series											
LM11749	0.6875	0.5750	0.05	0.12	LM11710	1.5700	0.4200	0.05	0.06	0.5450	
LM11900 series											
LM11949	0.7500	0.6550	0.05	0.18	LM11910	1.7810	0.4750	0.05	0.10	0.6100	

All dimensions listed in inches unless otherwise noted.


12000 series - 14000 series

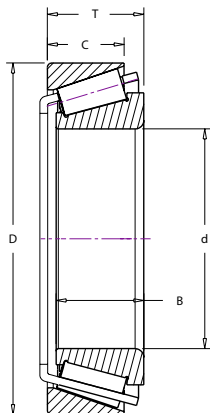

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
12000 series											
12175	1.7500	0.6750	0.06	0.35							
12500 series											
12580	0.8125	0.7813	0.06	0.26	12520	1.9380	0.6250	0.06	0.15	0.7813	
M12600 series											
M12648	0.8750	0.7200	0.05	0.23	M12610	1.9687	0.5500	0.05	0.13	0.6900	
M12649	0.8437	0.7200	0.05	0.24							
LM12700 series											
LM12749	0.8656	0.6550	0.05	0.19	LM12711	1.8100	0.4750	0.05	0.09	0.6100	
					LM12710	1.7810	0.4750	0.05	0.27	0.6100	
13600 series											13686: MAY BE PAIRED WITH ALL SGL E CUPS AND WILL REQUIRE .2813" TO BE ADDED TO THE T-WIDTH VALUES
13685	1.5000	0.7500	0.14	0.40	13620	2.7170	0.5938	0.03	0.23	0.7500	
13686	1.5000	1.0313	0.06	0.54	13621	2.7170	0.5938	0.09	0.22	0.7500	
13687	1.5000	0.7500	0.08	0.41							
13800 series											
138889	1.5000	0.4688	0.06	0.24	13830	2.5000	0.3750	0.03	0.12	0.5000	
14000 series											
14116	1.1900	0.7710	0.03	0.51	14274	2.7170	0.6250	0.13	0.28	0.7813	14123A: EXTENDED LARGE RIB SHOULDER ON OD BACKFACE 14136A: EXTENDED LARGE RIB SHOULDER ON OD BACKFACE
14123A	1.2500	1.0520	0.17	0.56	14276	2.7170	0.6250	0.05	0.29	0.7813	
14124	1.2500	0.7710	0.03	0.05							
14125A	1.2500	0.7710	0.14	0.48							
14130	1.3125	0.7710	0.14	0.47							
14131	1.3125	0.7710	0.03	0.46							
14136A	1.3750	1.0520	0.03	0.49							
14137A	1.3750	0.7710	0.06	0.43							
14138A	1.3750	0.7710	0.14	0.46							
14139	1.3770	0.7710	0.05	0.44							

All dimensions listed in inches unless otherwise noted.


15000 series - 18600 series

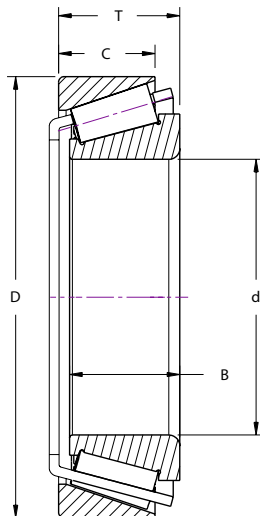

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii			
	d	B				D	C			T	
15000 series											15123: SPECIAL BACKFACE RADIUS
15100	1.0000	0.8125	0.14	0.47	15243	2.4375	0.5625	0.08	0.17	0.7500	
15101	1.0000	0.8125	0.03	0.47	15245	2.4409	0.5625	0.05	0.18	0.7500	
15102	1.0000	0.8125	0.06	0.48	15250	2.5000	0.6250	0.05	0.24	0.8125	
15106	1.0625	0.8125	0.03	0.45	15250X	2.5000	0.6250	0.06	0.24	0.8125	
15112	1.1250	0.8125	0.14	0.42							
15113	1.1250	0.8125	0.03	0.43							
15117	1.1806	0.8125	0.05	0.40							
15118	1.1895	0.8125	0.14	0.39							
15120	1.1895	0.8125	0.03	0.40							
15123	1.2500	0.7500	spcl.	0.33							
15125	1.2500	0.8125	0.14	0.36							
15126	1.2500	0.8125	0.03	0.37							
15500 series											
15578	1.0000	0.6875	0.05	1.20	15520	2.2500	0.5313	0.06	0.15	0.6875	
15580	1.0625	0.6875	0.14	0.30							
15590	1.1250	0.6875	0.14	0.27							
17800 series					17831	3.1490	0.5937	0.05	0.32	0.7812	
18500 series											
18590	1.6250	0.6875	0.14	0.43	18520	2.8750	0.5000	0.06	0.18	0.6562	
18600 series											
18685	1.7500	0.6875	0.11	0.49	18620	3.1250	0.5313	0.06	0.27	0.6875	
18690	1.8125	0.6875	0.11	0.46							

All dimensions listed in inches unless otherwise noted.


18700 series - 25800 series

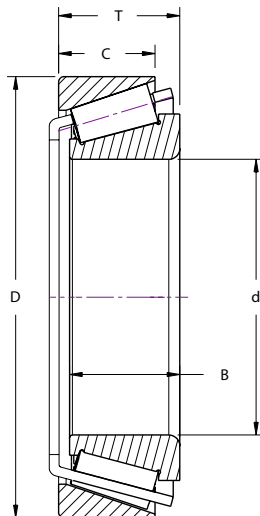

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
18700 series 18790	2.0000	0.6875	0.14	0.51	18720	3.3465	0.5313	0.06	0.29	0.6875	
19000 series					19268	2.6875	0.4688	0.06	0.19	0.6250	
21000 series 21075	0.7500	0.8598	0.06	0.34	21212	2.1250	0.6250	0.09	0.21	0.8750	
L21500 series L21549	0.6250	0.4330	0.05	0.07	L21511	1.3775	0.3430	0.05	0.04	0.4330	
23000 series 23100	1.0000	0.8450	0.06	0.49	23256	2.5625	0.6250	0.06	0.31	0.8750	
24700 series 24780	1.6250	0.9063	0.14	0.61	24720	3.0000	0.6875	0.06	0.33	0.8750	24780: BROKEN FRONTFACE ID
25500 series 25577	1.6880	1.0000	0.14	0.82	25520	3.2650	0.7500	0.03	0.44	0.9375	
25578	1.6875	1.0000	0.09	0.83	25521	3.2700	0.7500	3.30	0.13	0.9375	
25580	1.7500	1.0000	0.14	0.77	25522	3.2700	0.7525	0.08	0.44	0.9400	
25581	1.7500	1.0000	0.02	0.79	25523	3.2650	0.8750	0.09	0.54	1.0625	
25584	1.7710	1.0000	0.06	0.77							
25590	1.7960	1.0000	0.14	0.74							
25800 series 25877	1.3750	0.9688	0.06	0.71	25820	2.8750	0.7500	0.09	0.36	0.9375	
25880	1.4365	0.9688	0.06	0.68	25821	2.8750	0.7500	0.03	0.36	0.9375	

All dimensions listed in inches unless otherwise noted.


26000 series - 28900 series

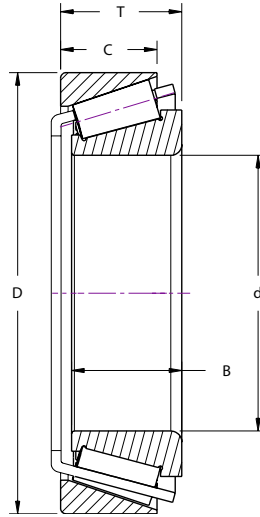

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
26000 series											
26118	1.1806	0.7450	0.06	0.49	26283	2.8346	0.6250	0.06	0.35	0.7480	
26800 series											
26878	1.5000	1.0000	0.03	0.86	26820	3.1562	0.8125	0.13	0.47	1.0000	
26882	1.6250	1.0000	0.14	0.76	26822	3.1250	0.7500	0.03	0.41	0.9375	
26883	1.3780	1.0000	0.03	0.95	26823	3.0000	0.8125	0.06	0.31	1.0000	
26884	1.6880	1.0000	0.14	0.71	26824	3.1496	0.7500	0.05	0.47	0.9375	
26886	1.6880	1.0000	0.06	0.72							
27600 series											
27687	3.2500	1.0000	0.14	1.54	27620	4.9375	0.7813	0.06	0.76	1.0000	
27689	3.2813	1.0000	0.03	1.52						1.0000	
27690	3.2813	1.0000	0.14	1.49							
28000 series											
28138	1.3770	0.8244	0.06	0.67	28315	3.1496	0.6250	0.06	0.45	0.8270	
28500 series											
28579	1.9680	1.0000	0.09	1.04	28521	3.6250	0.7813	0.03	0.54	0.9688	
28580	2.0000	1.0000	0.14	1.02							
28584	2.0625	1.0000	0.14	0.94							
28600 series											
28680	2.1875	0.9688	0.14	1.08	28622	3.8437	0.7656	0.03	0.59	0.9688	
28682	2.2500	0.9688	0.14	1.02							
28900 series											
28985	2.3750	1.0000	0.14	1.17	28920	4.0000	0.7813	0.13	0.58	1.0000	
28995	2.4700	1.0000	0.14	1.06	28921	3.9370	0.7813	0.13	0.49	1.0000	

All dimensions listed in inches unless otherwise noted.


29500 series - 36600 series

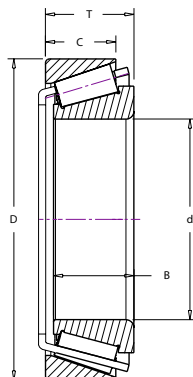

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
29500 series											
29586	2.5000	1.0000	0.06	1.45	29520	4.2500	0.7500	0.13	0.60	1.0000	
29590	2.6250	1.0000	0.14	1.28	29522	4.2500	0.7500	0.03	0.62	1.0000	
29600 series											
29675	2.7500	1.0000	0.06	1.52	29620	4.4375	0.7500	0.13	0.60	1.0000	
29685	2.8750	1.0000	0.14	1.37							
LM29700 series											
LM29748	1.5000	0.7200	spcl.	0.32	LM29710	2.5625	0.5500	0.05	0.17	0.7100	LM29748: SPECIAL BACK-FACE RADIUS
LM29749	1.5000	0.7200	0.09	0.34	LM29711	2.5625	0.6200	0.05	0.22	0.7800	
31500 series											
31594	1.3750	1.1250	0.06	0.87	31520	3.0000	0.9375	0.13	0.50	1.1563	
33000 series											
33275	2.7500	1.1875	0.14	1.81	33462	4.6250	0.9375	0.13	0.95	1.1875	
33281	2.8125	1.1875	0.14	1.72	33472	4.7244	0.9230	0.03	1.15	1.1730	
33287	2.8750	1.1875	0.14	1.62							
33800 series											
33891	2.0625	1.1250	0.14	1.23	33821	3.7500	0.8750	0.09	0.58	1.0938	
33885	1.7500	1.1250	0.03	1.57							
33889	2.0000	1.1250	0.14	1.34							
33890	2.0625	1.1250	0.06	1.20							
34000 series											
34300	3.0000	0.9060	0.08	1.43	34478	4.7812	0.6875	0.08	0.68	0.9688	
34301	3.0000	0.9060	0.14	2.552							
36600 series											
36690	5.7500	1.1250	0.06	3.41	36620	7.6250	0.9063	0.06	1.59	1.1250	

All dimensions listed in inches unless otherwise noted.


37000 series - 45200 series



CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
37000 series											37425: FRONTFACE CHAMFER
37425	4.2500	0.8440	0.14	1.94	37625	6.2500	0.6250	0.13	1.04	0.9063	
39000 series					39412	4.1250	0.6250	0.08	0.41	0.8438	
39500 series											
39580	2.2500	1.1875	0.14	2.26	39520	4.4375	0.9375	0.13	0.79	1.1875	
39581	2.2500	1.1875	0.31	2.18	39521	4.4375	0.9375	0.03	0.90	1.1875	
39585	2.5000	1.1875	0.14	1.95							
39590	2.6250	1.1875	0.14	1.80							
42000 series											
42381	3.8125	1.1406	0.14	2.47	42584	5.8437	0.8438	0.12	1.22	1.1250	
42600 series											
42687	3.0000	1.2205	0.14	2.22	42620	5.0000	0.8750	0.13	0.94	1.1875	
43000 series											
43112	1.1250	0.9478	0.03	0.90	43312	3.1250	0.6875	0.06	0.48	1.0000	
43131	1.3125	0.9478	0.14	0.81							
44000 series											
44162	1.6250	0.9330	0.09	0.96	44348	3.4843	0.6875	0.06	0.53	1.0000	
L44600 series											
L44640	0.9375	0.5800	0.06	0.21	L44610	1.9800	0.4200	0.05	0.08	0.5600	
L44643	1.0000	0.5800	0.05	0.19							
L44649	1.0625	0.5800	0.14	0.17							
45200 series											
45284	2.0000	1.2188	0.25	1.89	45220	4.1250	0.9375	0.13	0.76	1.1875	
45287	2.1250	1.2188	0.03	1.76	45221	4.1250	0.9375	0.03	1.00	1.1876	
45289	2.2500	1.2188	0.03	1.70							
45290	2.2500	1.2188	0.09	1.70							
45291	2.2500	1.2188	0.25	1.60							

All dimensions listed in inches unless otherwise noted.


L45400 series - 52000 series

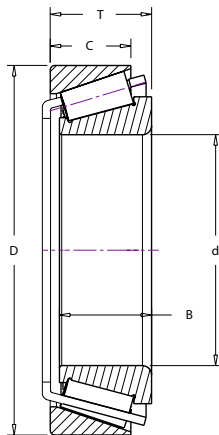

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
L45400 series L45449	1.1417	0.5800	0.14	0.17	L45410	1.9800	0.4200	0.05	0.08	0.5600	L45410: CHAMFER ON FRONTFACE OD
46700 series 46790	6.5000	1.5625	0.14	7.30	46720	8.8750	1.3125	0.13	3.59	1.6250	46790: Frontface Chamfer
47400 series 47487	2.7500	1.2813	0.14	2.105	47420	4.7244	1.0313	0.13	1.04	1.2813	
47600 series 47678	3.0000	5.2500	0.25	3.05	47620	5.2500	1.0313	0.13	1.24	1.3125	
47679	3.0000	1.3125	0.14	2.95							
47686	3.2500	1.3125	0.14	2.50							
47687	3.2500	1.3125	0.27	2.60							
48100 series 48190	4.2500	1.3750	0.14	3.37	48120	6.3750	1.0625	0.13	1.79	1.3750	
48200 series 48290	5.0000	1.5000	0.14	4.81	48220	7.1875	1.3125	0.13	2.47	1.5626	
48300 series 48393	5.3750	1.5625	0.14	4.88	48320	7.5000	1.3125	0.13	2.51	1.5625	
LM48500 series LM48500LA	1.3750	0.7200	spcl.	0.36	LM48510	2.5625	0.5500	0.05	0.19	1.5000	LM48500LA: SEALCLUDED
LM48548A	1.3750	0.7200	0.03	1.00							LM48548: SPECIAL BACK- FACE RADIUS
LM48548	1.3750	0.7200	spcl.	0.35							
48600 series 48685	5.6250	1.5625	0.14	5.45	48620	7.8750	1.3437	0.13	3.01	1.6250	
49000 series 49585	2.0000	1.2500	0.14	1.72							
52000 series 52400	4.0000	1.4219	0.14	3.80	52618	6.1875	1.0313	0.13	1.52	1.4375	
					52637	6.3750	1.0313	0.13	2.30	1.4375	

All dimensions listed in inches unless otherwise noted.


53000 series - 67900 series

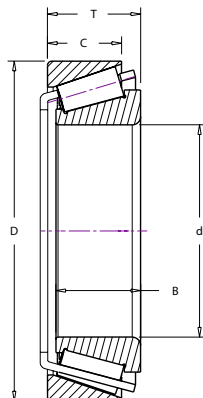

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
53000 series											
53176	1.7500	1.1142	0.05	1.29	53375	3.7500	0.8125	0.03	0.80	1.2188	
55000C series											
55175C	1.7500	1.0594	0.14	2.11	55437	4.3750	0.8125	0.13	1.10	1.1875	
56000 series											
56425	4.2500	1.4375	0.14	3.92	56650	6.5000	1.0625	0.13	1.86	1.4375	
59000 series											
59175	1.7500	1.4375	0.14	2.37	59412	4.1250	1.1250	0.13	1.03	1.4375	
64000 series											
64450	4.5000	1.6250	0.14	5.21	64700	7.0000	1.1875	0.13	2.41	1.6250	
65000 series											
					65500	5.0000	1.3750	0.13	2.25	1.7500	
LM67000 series											
LM67000LA	1.2500	0.6600	spcl.	0.27	LM67010	2.3280	0.4650	0.05	0.14	0.6250	LM67000LA: SEAL INCLUDED
LM67048	1.2500	0.6600	spcl.	0.25							LM67048: SPECIAL BACK-FACE RADIUS
LM67049A	1.2500	0.6600	0.03	0.28							
67300 series											
67388	5.0000	1.8125	0.14	8.05	67322	7.7500	1.5000	0.13	3.18	1.8125	
67700 series											
67780	6.5000	1.8750	0.14	12.39	67720	9.7500	1.5000	0.13	5.05	1.8750	
67786	6.8750	1.8750	0.31	10.06							
67791	7.0000	1.8750	0.41	10.52							
67800 series											
67884	7.3750	1.8438	0.14	13.04							
67900 series											
67983	8.0000	1.8125	0.14	13.59							

All dimensions listed in inches unless otherwise noted.


68000 series - HM88500 series

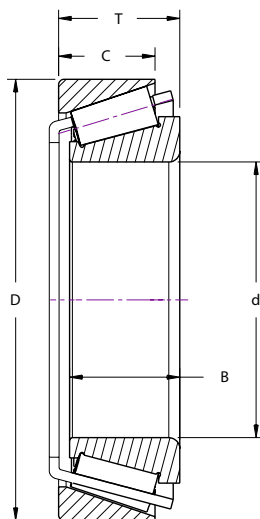

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
68000 series 68462	4.6250	1.2500	0.14	3.76	68712	7.1250	1.0000	0.13	2.28	1.3750	
L68100 series L68149	1.3775	0.6600	spcl.	0.24	L68110 L68111	2.3280 2.3612	0.4700 0.4700	0.05 0.05	0.12 0.14	0.6250 0.6250	L68149: SPECIAL BACK- FACE RADIUS
L69300 series JL69349	1.4961	0.6693	spcl.	0.30	JL69310	2.4803	0.5315	0.05	0.16	0.6693	JL69349: SPECIAL BACK- FACE RADIUS
71000 series 71412 71425 71450	4.1250 4.2500 4.5000	1.9375 1.9375 1.9375	0.14 0.14 0.14	8.95 8.50 7.56	71750	7.5000	1.3750	0.13	3.79	1.8750	
72000C series 72201C 72218C	2.0000 2.1875	1.2910 1.2910	0.03 0.14	2.97 2.89	72487	4.8750	1.0000	0.13	1.72	1.4375	
74000 series 74500 74525 74550	5.0000 5.2500 5.5000	1.8750 1.8750 1.8750	0.14 0.14 0.14	11.48 9.40 8.96	74845 74850	8.4636 8.5000	1.3750 1.3750	0.13 0.13	4.06 4.29	1.8750 1.8750	
M84500 series M84548	1.0000	0.7650	0.06	0.34	M84510	2.2500	0.5800	0.06	0.19	0.7650	
M86600 series M86649	1.1875	0.8438	0.06	0.46	M86610	2.5312	0.6563	0.06	0.28	0.8438	
M88000 series M88048	1.3125	0.8750	0.03	0.55	M88010	2.6875	0.6875	0.06	0.35	0.8750	
HM88500 series HM88542	1.2500	1.0938	0.05	0.87	HM88510	2.8750	0.9063	0.13	0.57	1.1563	

All dimensions listed in inches unless otherwise noted.


HM88600 series - JM205100 series

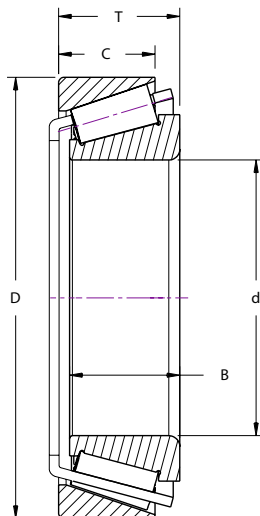

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
HM88600 series											
AXS HM88648	1.4062	1.0000	0.14	0.69	HM88610	2.8438	0.7812	0.09	0.44	1.0000	
AXS HM88649	1.3750	1.0000	0.09	0.69							
HM89400 series											
HM89440	1.2500	1.1250	0.03	0.97	HM89410	3.0000	0.9063	0.13	0.55	1.1563	
HM89446	1.3750	1.1250	0.14	0.87							
HM89449	1.4375	1.1250	0.14	0.83							
93000 series											
93825	8.2500	2.5000	0.17	23.96	93125	12.5000	1.8125	0.13	13.18	2.5000	
93825A	8.2500	2.5000	0.50	23.11							
95000 series											
95475	4.7500	2.5000	0.25	18.30	95925	9.2500	1.9375	0.13	8.91	2.5000	
95500	5.0000	2.5000	0.25	16.94							
99000 series											
99600	6.0000	2.6250	0.28	18.15	99100	10.0000	1.8750	0.13	9.35	2.6250	
LM102900 series											
LM102949	1.7812	0.7800	0.14	0.47	LM102910	2.8910	0.6200	0.03	0.22	0.7700	
JLM104900 series											
JLM104948	1.9685	0.8465	0.12	0.71	JLM104910	3.2283	0.6693	0.02	0.28	0.8465	
JLM104949	2.0000	0.8750	0.14	0.68	LM104911	3.2500	0.6500	0.05	0.29	0.8313	
					LM104912	3.2650	0.6500	0.05	0.30	0.8313	
EE113000 series											
EE113091	8.9945	3.3750	0.25	31.66	EE113170	17.0000	1.9375	0.25	33.34	3.6250	
JM205100 series											
JM205149	1.9685	1.1024	0.12	1.12	JM205110	3.5433	0.9055	0.10	0.53	1.1024	

All dimensions listed in inches unless otherwise noted.


M207000 series - HH421200 series

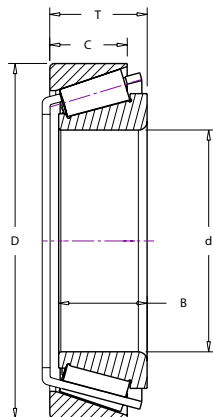

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
JM207000 series											
JM207049	2.1654	1.1417	0.06	1.29	JM207010	3.7402	0.9252	0.10	0.56	1.1417	
JM207049A	2.1654	1.1417	0.24	1.24							
JH211700 series											
JH211749	2.5591	1.5157	0.12	2.76	JH211710	4.7244	1.2598	0.10	1.36	1.5354	
HM212000 series											
HM212047	2.5000	1.5100	0.28	2.99	HM212011	4.8125	1.1700	0.13	1.32	1.5000	
HM212049	2.6250	1.5100	0.14	2.80							
H217200 series											
JH217249	3.3465	1.8110	0.12	5.12	JH217210	5.9055	1.4961	0.10	2.58	1.8110	
HM218200 series											
HM218248	3.5423	1.5748	0.28	3.91	HM218210	5.7864	1.2795	0.14	1.75	1.5748	
HH221400 series											
HH221449	4.0000	2.2650	0.31	10.99	HH221410	7.5000	1.8125	0.13	4.88	2.2500	
L225800 series											
L225849	5.0000	1.0313	0.06	2.60							
HH228300 series											
HH228340	4.7500	3.2500	0.38	29.63	HH228318	10.2352	2.4375	0.16	15.92	3.0625	
LM300800 series											
LM300849	1.6137	0.7087	spcl.	0.36	LM300811	2.6762	0.5315	0.06	0.18	0.6890	LM300849: SPECIAL BACK-FACE RADIUS
HM318400 series											
JHM318448	3.5433	1.7323	0.14	5.24	JHM318410	6.1024	1.3976	0.10	2.39	1.7323	
H414200 series											
H414249	2.8125	1.6250	0.14	4.10	H414210	5.3750	1.2500	0.13	1.73	1.6250	
HH421200 series											
HH421246	3.8750	2.5000	0.25	10.48	HH421210	7.2500	2.0625	0.13	5.56	2.5000	

All dimensions listed in inches unless otherwise noted.


LM501300 series - L610500 series

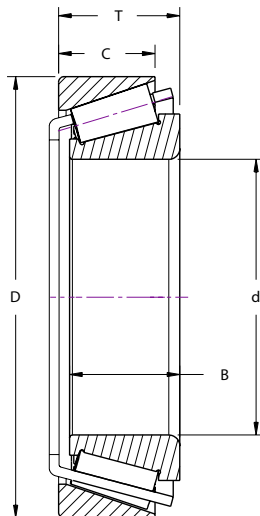

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
LM501300 series LM501349	1.6250	0.7800	0.14	0.50	LM501310 LM501314	2.8910 2.8910	0.5800 0.6537	0.03 0.03	0.24 0.28	0.7700 0.8437	
JLM506800 series JLM506849	2.1654	0.9055	0.06	0.80	JLM506810	3.5433	0.7283	0.02	0.41	0.9055	
JM511900 series JM511946	2.5591	1.1024	0.12	1.58	3920 JM511910	4.4375 4.3307	0.9375 0.8858	0.13 0.10	0.98 0.74	1.1425 1.1024	
JM515600 series JM515649	3.1496	1.3386	0.12	2.50	JM515610	5.1181	1.1220	0.10	1.26	1.3780	
HM518400 series HM518445	3.5000	1.5625	0.25	4.52	HM518410	6.0000	1.1875	0.13	1.68	1.5625	
JHM522600 series JHM522649	4.3307	1.8110	0.12	6.72	JHM522610	7.0866	1.4961	0.10	3.30	1.8504	
HM535300 series HM535349	6.7500	2.6250	0.14	17.4	HM535310	10.2500	2.0625	0.13	8.70	2.6250	
LM603000 series LM603049	1.7812	0.7812	0.14	0.24	LM603011 LM603012 LM603014	3.0625 3.0625 3.1486	0.5937 0.6562 0.5937	0.03 0.03 0.03	0.27 0.31 0.34	0.7812 0.8437 0.7812	
L610500 series L610549	2.5000	0.7500	0.06	0.67	L610510	3.7188	0.5938	0.06	0.34	0.7500	

All dimensions listed in inches unless otherwise noted.


M612900 series - M802000 series

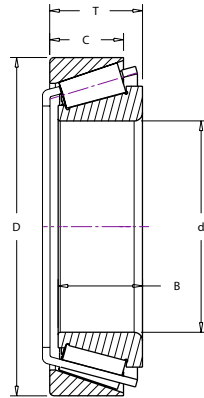

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
JM612900 series					JM612910						
JM612949	2.7559	1.1417	0.12	1.70	JM612910	4.5276	0.9055	0.10	0.79	1.1417	
JLM710900 series					JLM710910						
JLM710949C	2.5591	0.9055	0.12	1.14	JLM710910	4.1339	0.7283	0.04	0.52	0.9449	
JLM714100 series					JLM714110						
JLM714149	2.9528	0.9843	0.12	1.34	JLM714110	4.5276	0.7480	0.10	0.58	0.9843	
JM714200 series					JM714210						
JM714249	2.9528	1.1614	0.12	1.93	JM714210	4.7244	0.9843	0.10	0.94	1.2205	
H715300 series					H715311						H715345: FRONTFACE CHAMFER
H715334	2.4375	1.8125	0.14	5.70	H715311	5.3750	1.4375	0.13	2.12	1.8125	
H715345	2.8125	1.8125	0.14	4.75	H715311	5.3750	1.4375	0.13	2.12	1.8125	
JM716600 series					JM716610						
JM716648	3.3465	1.1417	0.24	1.92	JM716610	5.1181	0.9449	0.10	1.00	1.1811	
JM716649	3.3465	1.1417	0.12	1.99	JM716610	5.1181	0.9449	0.10	1.00	1.1811	
JM719100 series					JM719113						
JM719149	3.7402	1.3386	0.12	3.10	JM719113	5.9055	1.0630	0.10	1.68	1.3780	
JHM720200 series					JHM720210						
JHM720249	3.9370	1.5748	0.12	4.49	JHM720210	6.2992	1.2598	0.10	2.12	1.6142	
M734400 series					JM734410						
JM734449	6.6929	1.7520	0.12	9.35	JM734410	9.4488	1.4567	0.10	4.55	1.8110	
LM739700 series					LM739710						
LM739749	7.7500	1.5625	0.14	7.87	LM739710	10.1250	1.1875	0.13	3.84	1.5625	
M802000 series					M802011						
M802048	1.6250	1.0100	0.14	0.92	M802011	3.2500	0.7950	0.13	0.49	1.0450	

All dimensions listed in inches unless otherwise noted.

HM803100 series - H936300 series

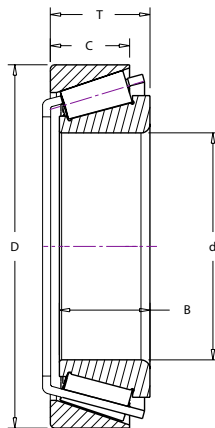

CONE					CUP					BEARING	Notes
Number	Dimensions			Weight (lbs)	Number	Dimensions			Weight (lbs)	Width	
	Bore	Width	Max Shaft Fillet Radii			Outside Dia.	Width	Max Housing Fillet Radii		T	
	d	B				D	C				
HM803100 series											
HM803146	1.6250	1.1563	0.14	1.28	HM803110	3.5000	0.9063	0.13	0.69	1.1875	HM803146: FRONTFACE CHAMFER
HM803149	1.7500	1.1563	0.14	1.17							HM803149: FRONTFACE CHAMFER
M804000 series											
M804048	1.8750	1.0000	0.03	1.04	M804010	3.5000	0.7500	0.13	0.48	1.0000	
M804049	1.8750	1.0000	0.14	0.98							
HM804800 series											
HM804840	1.6250	1.1563	0.14	1.66	HM804810	3.7500	0.9063	0.13	0.77	1.1875	
HM804848	1.9060	1.1563	0.09	1.50							
HM807000 series											
HM807040	1.7500	1.4375	0.14	2.57	HM807010	4.1250	1.1250	0.13	1.11	1.4375	
HM807046	2.0000	1.4375	0.14	2.23							
HM807049	2.1250	1.4375	0.14	2.07							
LM813000 series											
JLM813049	2.7559	0.9843	0.04	1.30	JLM813010	4.3307	0.8071	0.10	0.65	1.0236	
L814700 series											
L814749	3.0000	0.7500	0.06	0.88	L814710	4.3125	0.5938	0.06	0.44	0.7500	
LM814800 series											
LM814849	3.0625	1.0000	0.14	1.35	LM814810	4.6250	0.7500	0.13	0.63	1.0000	
L819300 series											
JL819349	3.7402	0.7874	0.20	1.28							
M822000 series											
JM822049	4.3307	1.3780	0.12	3.58	JM822010	6.4961	1.0433	0.10	1.84	1.3780	
HM903200 series											
HM903249	1.7500	1.1250	0.14	1.39	HM903210	3.7500	0.8750	0.03	0.85	1.2188	
HM926700 series											
HM926747	5.0000	1.9460	0.14	13.14	HM926710	9.0000	1.5000	0.13	6.14	2.1250	
H936300 series											
H936340	6.1250	3.1250	0.25	48.70	H936310	13.0000	2.1250	0.25	20.99	3.3750	
H936349	6.6250	3.1250	0.25	44.27							

All dimensions listed in inches unless otherwise noted.