



30203 - 30303 Metric series

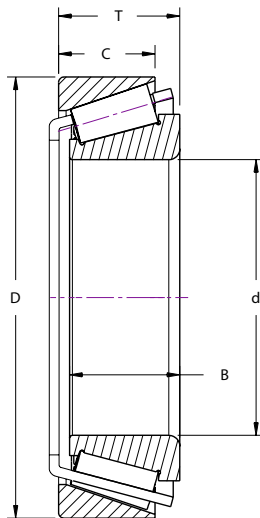


Number	Bore	OD	BRG Width	Cone Width	Cup Width	Max Shaft Fillet Radii	Max Housing Fillet Radii	Weight (lbs)
	d	D	T	B	C			
30202	15	35	11.75	11	10.0	2.5	2.0	0.11
30203	17	40	13.25	12	11.0	1.0	1.0	0.18
30204	20	47	15.25	14	12.0	1.0	1.0	0.28
30205	25	52	16.25	15	13.0	1.0	1.0	0.33
30206	30	62	17.25	16	14.0	1.0	1.0	0.51
30207	35	72	18.25	17	15.0	1.5	1.5	0.53
30208	40	80	19.75	18	16.0	1.5	1.5	0.95
30209	45	85	20.75	19	16.0	1.5	1.5	1.07
30210	50	90	21.75	20	17.0	1.5	1.5	1.21
30211	55	100	22.75	21	18.0	2.0	1.5	1.58
30212	60	110	23.75	22	19.0	2.0	1.5	1.97
30213	65	120	24.75	23	20.0	2.0	1.5	2.52
30214	70	125	26.25	24	21.0	2.0	1.5	2.56
30215	75	130	27.25	25	22.0	2.0	1.5	2.97
30216	80	140	28.25	26	22.0	2.5	2.0	4.72
30217	85	150	30.50	28	24.0	2.5	2.0	4.63
30218	90	160	32.50	30	26.0	2.5	2.0	5.65
30220	100	180	37.00	34	29.0	3.0	2.5	8.50
30221	105	190	39.00	36	30.0	3.0	2.54	9.93
30222	110	200	41.00	38	32.0	3.0	2.54	11.7
30224	120	215	43.50	40	34.0	3.0	2.5	13.73
30302	15	42	14.25	13	11.0	1.0	1.0	0.22
30303	17	47	15.25	14	12.0	1.0	1.0	0.29

30304 - 32009 Metric series

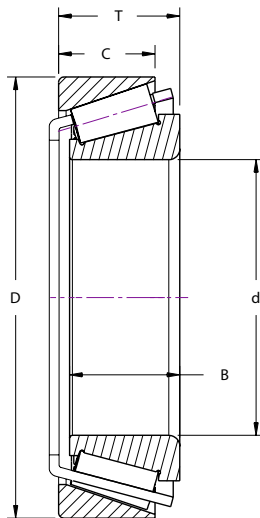


Number	Bore	OD	BRG Width	Cone Width	Cup Width	Max Shaft Fillet Radii	Max Housing Fillet Radii	Weight (lbs)
	d	D	T	B	C			
30304	20	52	16.25	15	13.0	1.5	1.5	0.39
30305	25	62	18.25	17	15.0	1.5	1.5	0.60
30306	30	72	20.75	19	16.0	1.5	1.5	0.88
30307	35	80	22.75	21	18.0	2.0	1.5	1.18
30308	40	90	25.25	23	20.0	2.0	1.5	1.62
30309	45	100	27.25	25	22.0	2.0	1.5	2.21
30310	50	110	29.25	27	23.0	2.5	2.0	2.80
30311	55	120	31.50	29	25.0	2.5	2.0	3.56
30312	60	130	33.50	31	26.0	3.0	2.5	4.32
30313	65	140	36.00	33	28.0	3.0	2.5	5.50
30314	70	150	38.00	35	30.0	3.0	2.5	6.64
30315	75	160	40.00	37	31.0	3.0	2.5	7.94
31307	35	80	22.75	21	15.0	2.0	1.5	1.10
31308	40	90	25.25	23	17.0	2.0	1.5	1.61
31309	45	100	27.25	25	18.0	2.0	1.5	2.20
31310	50	110	29.25	27	19.0	2.5	2.0	2.80
31311	55	120	31.50	29	21.0	2.5	2.0	3.42
31312	60	130	33.50	31	22.0	3.0	2.5	4.04
32004	20	42	15.00	15	12.0	0.6	0.6	0.21
32005	25	47	15.00	15	11.5	0.6	0.6	0.25
32006	30	55	17.00	17	13.0	1.0	1.0	0.38
32007	35	62	18.00	18	14.0	1.0	1.0	0.50
32008	40	68	19.00	19	14.5	1.0	1.0	0.61
32009	45	75	20.00	20	15.5	1.0	1.0	0.76

32010 - 32211 Metric series

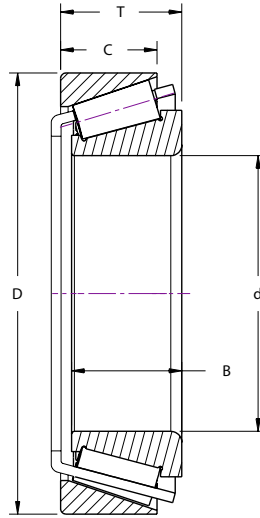


Number	Bore	OD	BRG Width	Cone Width	Cup Width	Max Shaft Fillet Radii	Max Housing Fillet Radii	Weight (lbs)
	d	D	T	B	C			
32010	50	80	20.00	20	15.5	1.0	1.0	0.82
32011	55	90	23.00	23	17.5	1.5	1.5	1.25
32012X	60	95	23.00	23	17.5	1.5	1.5	1.40
32013	65	100	23.00	23	17.5	1.5	1.5	1.41
32014	70	110	25.00	25	19.0	1.5	1.5	1.92
32015	75	115	25.00	25	19.0	1.5	1.5	1.98
32016	80	125	29.00	29	22.0	1.5	1.5	2.82
32017	85	130	29.00	29	22.0	1.5	1.5	2.98
32018	90	140	32.00	32	24.0	2.0	1.5	3.81
32019	95	145	32.00	32	24.0	2.0	1.5	3.98
32020	100	150	32.00	32	24.0	2.0	1.5	4.19
32021	105	160	35.00	35	26.0	2.5	2.0	5.30
32022	110	170	38.00	38	29.0	2.5	2.0	6.82
32024	120	180	38.00	38	29.0	2.5	2.0	7.31
32026X	130	200	45.00	45	34.0	2.5	2.0	11.2
32032X	160	240	51.00	51	38.0	3.0	2.5	17.5
32034	170	260	57.00	57	43.0	3.0	2.5	23.4
32205	25	52	19.25	18	15.0	1.0	1.0	0.39
32206	30	62	21.25	20	17.0	1.0	1.0	0.63
32207	35	72	24.25	23	19.0	1.5	1.5	0.97
32208	40	80	24.75	23	19.0	1.5	1.5	1.18
32209	45	85	24.75	23	19.0	1.5	1.5	1.29
32210	50	90	24.75	23	19.0	1.5	1.5	1.37
32211	55	100	26.75	25	21.0	2.0	1.5	1.87

32212 - 33205 Metric series

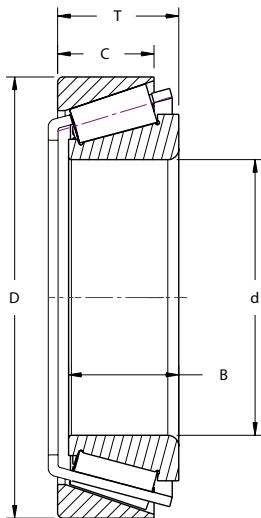

Number	Bore	OD	BRG Width	Cone Width	Cup Width	Max Shaft Fillet Radii	Max Housing Fillet Radii	Weight (lbs)
	d	D	T	B	C			
32212	60	100	29.75	28	24.0	2.0	1.5	2.54
32213	65	120	32.75	31	27.0	2.0	1.5	3.39
32214	70	125	33.25	31	27.0	2.0	1.5	3.61
32215	75	130	33.25	31	27.0	2.0	1.5	3.76
32216	80	140	35.25	33	28.0	2.5	2.0	4.51
32217	85	150	38.50	36	30.0	2.5	2.0	5.83
32218	90	160	42.50	40	34.0	2.5	2.0	7.37
32219	95	170	45.50	43	37.0	3.0	2.5	9.03
32221	105	190	53.00	50	43.0	3.0	2.5	15.20
32222	110	200	56.00	53	46.0	3.0	2.5	15.82
32230	150	270	77.00	73	60.0	4.0	3.0	42.40
32305	25	62	25.25	24	20.0	1.5	1.5	0.82
32306	30	72	28.75	27	23.0	1.5	1.5	1.24
32308	40	90	35.25	33	27.0	2.0	1.5	2.29
32309	45	100	38.25	36	30.0	2.0	1.5	3.03
32310	50	110	42.25	40	33.0	2.5	2.0	4.06
32311	55	120	45.50	43	35.0	2.5	2.0	2.18
32312	60	130	48.50	46	37.0	3.0	2.5	6.39
32313	65	140	51.00	48	39.0	3.0	2.5	7.81
32314	70	150	54.00	51	42.0	3.0	2.5	9.45
32928	140	190	32.00	32	25.0	2.0	1.5	5.56
32934	170	230	38.00	38	30.0	2.5	2.0	9.79
33013	65	100	27.00	27	21.0	1.5	1.5	1.70
33014	70	110	31.00	31	25.5	1.5	1.5	2.44
33018	90	140	39.00	39	32.5	2.0	1.5	5.07
33019	95	145	39.00	39	32.5	2.0	1.5	5.27
33205	25	52	22.00	22	18.0	1.0	1.0	0.50

33206 - 33216 Metric series

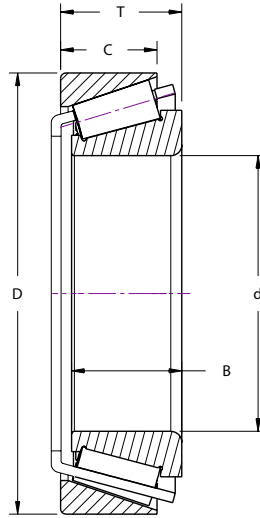

Number	Bore	OD	BRG Width	Cone Width	Cup Width	Max Shaft Fillet Radii	Max Housing Fillet Radii	Weight (lbs)
	d	D	T	B	C			
33206	30	62	25.00	25	19.5	1.0	1.0	0.78
33207	35	72	28.00	28	22.0	1.5	1.5	1.18
33208	40	80	32.00	32	25.0	1.5	1.5	1.62
33209	45	85	32.00	32	25.0	1.5	1.5	1.75
33210	50	90	32.00	32	24.5	1.5	1.5	1.87
33211	55	100	35.00	35	27.0	2.0	1.5	2.57
33212	60	110	38.00	38	29.0	2.0	1.5	3.37
33213	65	120	41.00	41	32.0	2.0	1.5	4.35
33214	70	125	41.00	41	32.0	2.0	1.5	4.66
33216	80	140	46.00	46	35.0	2.5	2.0	6.60