




7300 series – Duplex




BACK TO BACK



FACE TO FACE



TANDEM

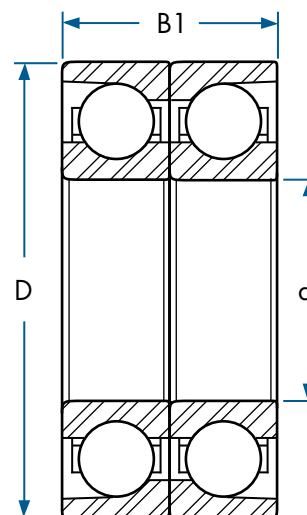

Bearing Size	Dimensions (mm)			Duplex Load Rating (lbf)		Duplex Limiting Speed (RPM)	
				Dynamic	Static	Grease	Oil
	d	D	B1	C _r	C _{0r}		
7301 BUA	12	37	24	3,780	2,200	15,000	22,000
7302 BUA	15	42	26	4,460	2,920	14,000	20,000
7303 BUA	17	47	28	5,070	3,640	12,000	17,000
7304 BUA	20	52	30	5,920	3,920	10,000	13,000
7305 BUA	25	62	34	8,370	5,980	8,300	11,000
7306 BUA	30	72	38	10,100	7,810	6,900	9,200
7307 BUA	35	80	42	11,850	9,110	6,200	8,200
7308 BUA	40	90	46	14,510	11,360	5,500	7,400
7309 BUA	45	100	50	18,460	15,340	4,900	6,600
7310 BUA	50	110	54	23,610	19,920	4,400	5,800
7311 BUA	55	120	58	27,210	23,380	4,000	5,400
7312 BUA	60	130	62	31,030	27,210	3,700	5,000
7313 BUA	65	140	66	35,070	31,250	3,500	4,600
7314 BUA	70	150	70	39,350	35,520	3,200	4,300
7315 BUA	75	160	74	42,940	40,020	3,000	4,000
7316 BUA	80	170	78	46,540	44,970	2,800	3,800
7317 BUA	85	180	82	50,140	50,140	2,700	3,500
7318 BUA	90	190	86	53,960	55,760	2,500	3,300
7319 BUA	95	200	90	57,560	61,380	2,400	3,200
7320 BUA	100	215	94	61,600	66,770	2,200	2,900
7321 BUA	105	225	98	69,700	79,810	2,100	2,800
7322 BUA	110	240	100	77,790	93,520	1,900	2,600

B = 40° contact angle

UA* = Flush ground for slight axial end play

UO = Flush ground for no end play

* Usually supplied UA. Usually supplied with MP brass cage.