



(C)CF-SB series

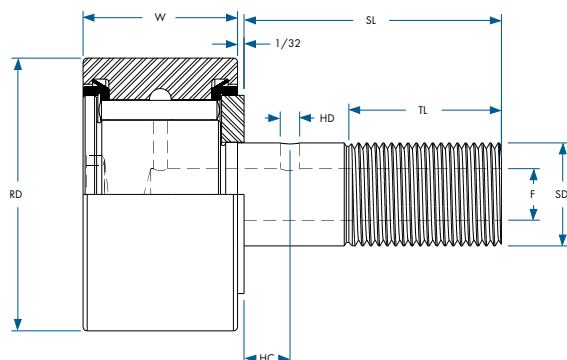

(CF)

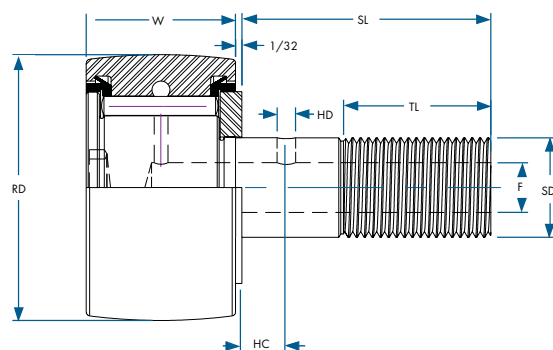

(CCF)

BEARING NUMBER	DIMENSIONS (INCH)											CROWN RADIUS	CLAMP TRQ (in./lbs.)	STATIC CAPACITY (lbf.)	DYNAMIC CAPACITY (lbf.)
	ROLLER DIA. (RD)	ROLLER WIDTH (W)	STUD DIA. (SD)	STUD LENGTH (SL)	THRD LENGTH (TL)	THRD	OIL HOLE CENTER (HC)	OIL HOLE DIA. (HD)	LUB FIT SIZE (F)	MIN. BOSS DIA.	HOUSING BORE DIA. (+.0002/-0.0003)				
(C)CF 1/2SB	0.5000	0.3750	0.1900	0.625	0.2500	10-32	—	—	1/8*	19/64	0.1903	7	15	790	680
(C)CF 9/16SB	0.5625	0.3750	0.1900	0.625	0.2500	10-32	—	—	1/8*	19/64	0.1903	7	15	790	680
(C)CF 5/8SB	0.6250	0.4375	0.2500	0.750	0.3125	1/4-28	—	—	1/8*	23/64	0.2503	8	35	1215	955
(C)CF 11/16SB	0.6875	0.4375	0.2500	0.750	0.3125	1/4-28	—	—	1/8*	23/64	0.2503	8	35	1215	955
(C)CF 3/4SB	0.7500	0.5000	0.3750	0.875	0.3750	3/8-24	1/4	3/32	3/16	1/2	0.3753	10	95	2065	1660
(C)CF 7/8SB	0.8750	0.5000	0.3750	0.875	0.3750	3/8-24	1/4	3/32	3/16	1/2	0.3753	10	95	2065	1660
(C)CF 1SB	1.0000	0.6250	0.4375	1.000	0.5000	7/16-20	1/4	3/32	3/16	41/64	0.4378	12	250	3060	2225
(C)CF 1 1/8SB	1.1250	0.6250	0.4375	1.000	0.5000	7/16-20	1/4	3/32	3/16	41/64	0.4378	12	250	3060	2225
(C)CF 1 1/4SB	1.2500	0.7500	0.5000	1.250	0.6250	1/2-20	5/16	3/32	3/16	49/64	0.5003	14	350	4250	3930
(C)CF 1 3/8SB	1.3750	0.7500	0.5000	1.250	0.6250	1/2-20	5/16	3/32	3/16	49/64	0.5003	14	350	4250	3930
(C)CF 1 1/2SB	1.5000	0.8750	0.6250	1.500	0.7500	5/8-18	3/8	3/32	3/16	57/64	0.6253	20	650	5640	4840
(C)CF 1 5/8SB	1.6250	0.8750	0.6250	1.500	0.7500	5/8-18	3/8	3/32	3/16	57/64	0.6253	20	650	5640	4840
(C)CF 1 3/4SB	1.7500	1.0000	0.7500	1.750	0.8750	3/4-16	7/16	3/32	3/16	1 3/64	0.7503	20	1250	7920	6385
(C)CF 1 7/8SB	1.8750	1.0000	0.7500	1.750	0.8750	3/4-16	7/16	3/32	3/16	1 3/64	0.7503	20	1250	7920	6385
(C)CF 2SB	2.0000	1.2500	0.8750	2.000	1.0000	7/8-14	1/2	1/8	3/16	1 13/64	0.8753	24	1500	10570	8090
(C)CF 2 1/4SB	2.2500	1.2500	0.8750	2.000	1.0000	7/8-14	1/2	1/8	3/16	1 13/64	0.8753	24	1500	10570	8090
(C)CF 2 1/2SB	2.5000	1.5000	1.0000	2.250	1.1250	1-14	9/16	1/8	3/16	1 5/16	1.0003	30	2250	16450	11720
(C)CF 2 3/4SB	2.7500	1.5000	1.0000	2.250	1.1250	1-14	9/16	1/8	3/16	1 5/16	1.0003	30	2250	16450	11720
(C)CF 3SB	3.0000	1.7500	1.2500	2.500	1.2500	1 1/4-12	5/8	1/8	1/4	1 3/4	1.2503	30	3450	24910	15720
(C)CF 3 1/4SB	3.2500	1.7500	1.2500	2.500	1.2500	1 1/4-12	5/8	1/8	1/4	1 3/4	1.2503	30	3450	24910	15720
(C)CF 3 1/2SB	3.5000	2.0000	1.3750	2.750	1.3750	1 3/8-12	11/16	1/8	1/4	1 59/64	1.3753	30	4200	31625	22800
(C)CF 4SB	4.0000	2.2500	1.5000	3.500	1.5000	1 1/2-12	3/4	1/8	1/4	2 9/32	1.5003	30	5000	44770	29985

*Oil hole (F) drilled from flange end of the stud to the radial oil hole only.
(Unless otherwise specified, all dimensions are listed in inches.)