



(C)CFH-SB series

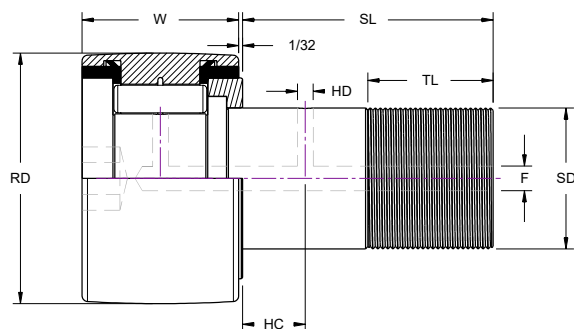

(CCFH)

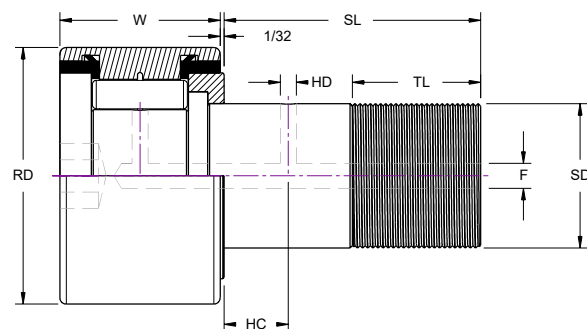

(CFH)

BEARING NUMBER	DIMENSIONS (INCH)											**RECOM. CLAMP TRQ (in./lbf.)	MAX STATIC CAPACITY (lbf.)	BASIC DYNAMIC RATING (lbf.)
	ROLLER DIA. (RD)	ROLLER WIDTH (W)	STUD DIA. (SD)	STUD LENGTH (SL)	THRD LENGTH (TL)	THRD	OIL HOLE CENTER (HC)	OIL HOLE DIA. (HD)	LUB FIT SIZE (F)	MIN. BOSS DIA.	HOUSING BORE DIA. (+.0002/-0.0003)			
(C)CFH 1/2SB	0.5000	0.3750	0.250	0.625	0.2500	1/4-28	—	—	1/8*	13/32	0.2503	35	1580	680
(C)CFH 9/16SB	0.5625	0.3750	0.250	0.625	0.2500	1/4-28	—	—	1/8*	13/32	0.2503	35	1580	680
(C)CFH 5/8SB	0.6250	0.4375	0.3125	0.750	0.3125	5/16-24	—	—	1/8*	15/32	0.3128	90	2480	955
(C)CFH 11/16SB	0.6875	0.4375	0.3125	0.750	0.3125	5/16-24	—	—	1/8*	15/32	0.3128	90	2480	955
(C)CFH 3/4SB	0.7500	0.5000	0.4375	0.875	0.3750	7/16-20	1/4	3/32	3/16	39/64	0.4378	250	4130	1660
(C)CFH 7/8SB	0.8750	0.5000	0.4375	0.875	0.3750	7/16-20	1/4	3/32	3/16	39/64	0.4378	250	4130	1660
(C)CFH 1SB	1.0000	0.6250	0.625	1.000	0.5000	5/8-18	1/4	3/32	3/16	25/32	0.6253	650	6120	2225
(C)CFH 1 1/8SB	1.1250	0.6250	0.625	1.000	0.5000	5/8-18	1/4	3/32	3/16	25/32	0.6253	650	6120	2225
(C)CFH 1 1/4SB	1.2500	0.7500	0.750	1.250	0.6250	3/4-16	5/16	3/32	3/16	63/64	0.7503	1250	8500	3930
(C)CFH 1 3/8SB	1.3750	0.7500	0.750	1.250	0.6250	3/4-16	5/16	3/32	3/16	63/64	0.7503	1250	8500	3930
(C)CFH 1 1/2SB	1.5000	0.8750	0.875	1.500	0.7500	7/8-14	3/8	3/32	3/16	1 3/32	0.8753	1500	11280	4840
(C)CFH 1 5/8SB	1.6250	0.8750	0.875	1.500	0.7500	7/8-14	3/8	3/32	3/16	1 3/32	0.8753	1500	11280	4840
(C)CFH 1 3/4SB	1.7500	1.0000	1.000	1.750	0.8750	1-14	7/16	3/32	3/16	1 1/4	1.0003	2250	15840	6385
(C)CFH 1 7/8SB	1.8750	1.0000	1.000	1.750	0.8750	1-14	7/16	3/32	3/16	1 1/4	1.0003	2250	15840	6385
(C)CFH 2SB	2.0000	1.2500	1.125	2.000	1.0000	1 1/8-12	1/2	1/8	3/16	1 13/32	1.1253	2800	21140	8090
(C)CFH 2 1/4SB	2.2500	1.2500	1.125	2.000	1.0000	1 1/8-12	1/2	1/8	3/16	1 13/32	1.1253	2800	21140	8090
(C)CFH 2 1/2SB	2.5000	1.5000	1.250	2.250	1.1250	1 1/4-12	9/16	1/8	3/16	1 11/16	1.2503	3450	32900	11720
(C)CFH 2 3/4SB	2.7500	1.5000	1.250	2.250	1.1250	1 1/4-12	9/16	1/8	3/16	1 11/16	1.2503	3450	32900	11720
(C)CFH 3SB	3.0000	1.7500	1.500	2.500	1.2500	1 1/2-12	5/8	1/8	1/4	2 1/8	1.5003	5000	49820	15720
(C)CFH 3 1/4SB	3.2500	1.7500	1.500	2.500	1.2500	1 1/2-12	5/8	1/8	1/4	2 1/8	1.5003	5000	49820	15720
(C)CFH 3 1/2SB	3.5000	2.0000	1.750	2.750	1.3750	1 3/4-12	11/16	1/8	1/4	2 7/16	1.7503	5000	63250	22800
(C)CFH 4SB	4.0000	2.2500	2.000	3.500	1.5000	2-12	3/4	1/8	1/4	2 51/64	2.0003	5000	89540	29985

**Clamping torque is based on dry threads. If threads are lubricated, use half of values shown.

*Oil Hole (F) drilled from the flange end of the stud to the radial oil hole only.

(Unless otherwise specified, all dimensions are listed in inches.)