


# 140 Sprockets

## 1 3/4" Pitch



# BLACKSTAR®

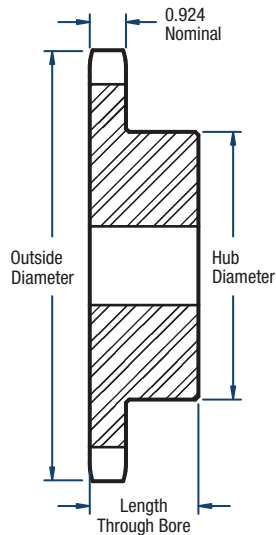

**TYPE B**

### Single- Type B

No. of Teeth	Catalog Number	Diameters (in)		Bore (in)		Hub (in)		Approx. Weight (lbs)
		Outside	Pitch	Minimum	Maximum	Diameter	Length Through Bore	
11	H140B11	7.01	6.213	1-1/2	2-3/4	4-1/4	2-1/4	11.3
12	H140B12	7.58	6.762	1-1/2	3	4-1/2	2-1/4	13.2
13	H140B13	8.15	7.313	1-1/2	3-3/4	5-1/2	2-3/8	18.9
14	H140B14	8.72	7.865	1-1/2	3-3/4	5-1/2	2-3/8	20.4
15	H140B15	9.28	8.418	1-1/2	4-1/4	6-1/4	2-3/8	25.1
16	H140B16	9.85	8.971	1-1/2	4-1/4	6-1/4	2-1/2	27.9
17	H140B17	10.41	9.524	1-1/2	4-1/4	6-1/4	2-1/2	29.8
18	H140B18	10.97	10.078	1-1/2	4-1/4	6-1/4	2-1/2	32.0
19	H140B19	11.54	10.633	1-1/2	4-1/4	6-1/4	2-1/2	34.1
20	H140B20	12.10	11.186	1-1/2	4-1/4	6-1/4	2-1/2	36.0
21	140B21H	12.66	11.743	1-1/2	4-1/4	6-1/4	2-1/2	38.7
22	140B22H	13.22	12.297	1-1/2	4-1/4	6-1/4	2-1/2	40.6
23	140B23H	13.78	12.852	1-1/2	4-1/4	6-1/4	2-1/2	42.1
24	140B24H	14.34	13.407	1-1/2	4-1/4	6-1/4	2-1/2	46.2
25	140B25H	14.90	13.963	1-1/2	4-1/4	6-1/4	2-1/2	47.8
26	140B26H	15.46	14.518	1-1/2	4-1/4	6-1/4	3	57.2
27	140B27H	16.02	15.075	1-1/2	4-1/4	6-1/4	3	58.5
28	140B28H	16.58	15.629	1-1/2	4-1/4	6-1/4	3	62.2
30	140B30H	17.70	16.742	1-1/2	4-1/4	6-1/4	3	69.8
31	140B31	18.26	17.297	1-1/2	4-1/4	6-1/4	3	73.0
32	140B32	18.82	17.854	1-1/2	4-1/4	6-1/4	3	76.3

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.