



140 Sprockets

1 3/4" Pitch



BLACKSTAR®

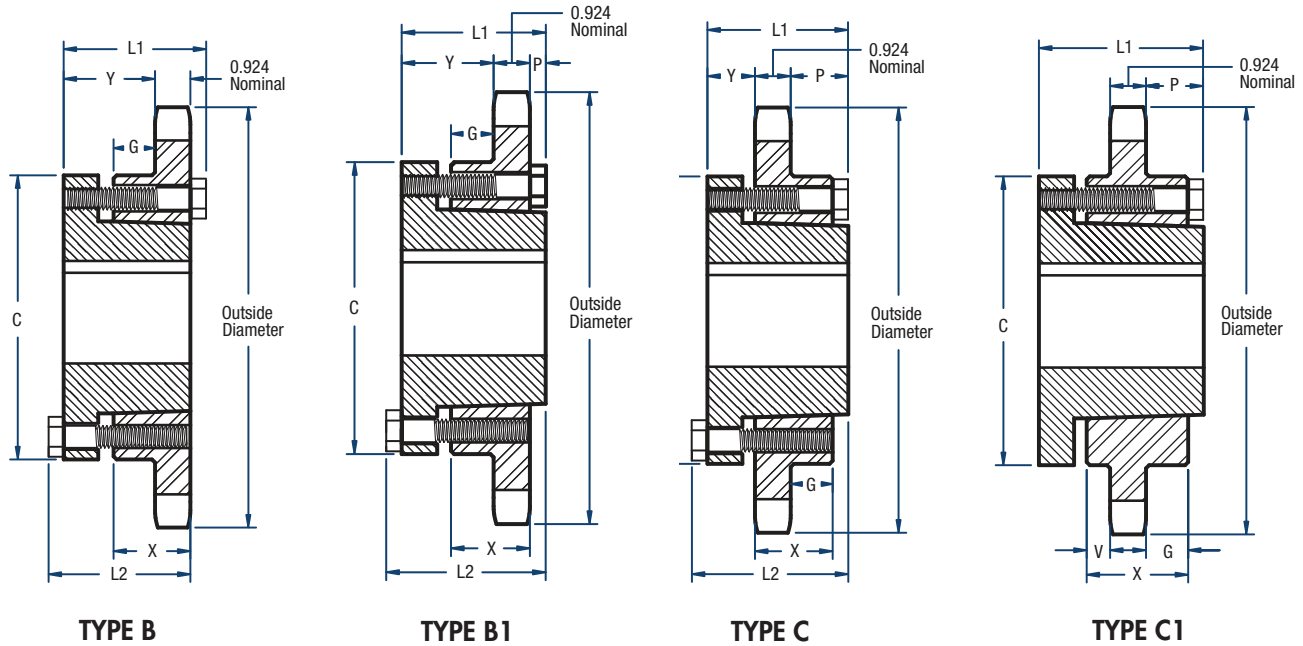

Single- QD Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)									Approx. Weight (lbs)	
			Outside	Pitch			L1	L2	C	Y	P	G	V	X	Bushing Only	Sprocket Only	
11	H140SF11	SF	7.01	6.213	B	2-15/16	2-1/4	2-1/4	4-5/8	1-5/64	—	21/64	—	1-1/4	3.0	5.6	
12	H140SF12	SF	7.58	6.762	B	2-15/16	2-1/4	2-1/4	4-5/8	1-5/64	—	21/64	—	1-1/4	3.0	7.4	
13	H140SF13	SF	8.15	7.313	B	2-15/16	2-1/4	2-1/4	4-5/8	1-5/64	—	21/64	—	1-1/4	3.0	8.9	
14	H140E14	E	8.72	7.865	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	11.6	
15	H140E15	E	9.28	8.418	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	14.2	
16	H140E16	E	9.85	8.971	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	15.9	
17	H140E17	E	10.41	9.524	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	18.0	
18	H140E18	E	10.97	10.078	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	19.6	
19	H140E19	E	11.54	10.633	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	22.0	
20	H140E20	E	12.10	11.186	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	24.6	
21	H140E21	E	12.66	11.743	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	27.6	
22	H140E22	E	13.22	12.297	B1	3-1/2	2-5/8	2-15/16	6	1-9/16	1/8	45/64	—	1-5/8	10.0	29.5	
23	H140F23	F	13.78	12.852	B1	3-15/16	3-5/8	4	6-5/8	2-9/16	1/8	1-37/64	—	2-1/2	11.5	36.4	
24	H140F24	F	14.34	13.407	B1	3-15/16	3-5/8	4	6-5/8	2-9/16	1/8	1-37/64	—	2-1/2	11.5	40.1	
25	H140F25	F	14.90	13.963	B1	3-15/16	3-5/8	4	6-5/8	2-9/16	1/8	1-37/64	—	2-1/2	11.5	42.3	
26	H140F26	F	15.46	14.518	B1	3-15/16	3-5/8	4	6-5/8	2-9/16	1/8	1-37/64	—	2-1/2	11.5	46.5	
30	H140F30	F	17.70	16.742	B1	3-15/16	3-5/8	4	6-5/8	2-9/16	1/8	1-37/64	—	2-1/2	11.5	60.4	
35	140F35	F	20.49	19.523	C	3-15/16	3-5/8	4	6-5/8	1	1-11/16	1-37/64	—	2-1/2	11.5	78.0	
36	140F36	F	21.05	20.080	C	3-15/16	3-5/8	4	6-5/8	1	1-11/16	1-37/64	—	2-1/2	11.5	84.0	
40	140J40	J	23.29	22.305	C	4-7/16	4-1/2	5	7-1/4	1-3/16	2-3/8	2-17/64	—	3-3/16	18.0	98.0	
45	140J45	J	26.08	25.088	C	4-7/16	4-1/2	5	7-1/4	1-3/16	2-3/8	2-17/64	—	3-3/16	18.0	120.0	
48	140J48	J	27.75	26.758	C	4-7/16	4-1/2	5	7-1/4	1-3/16	2-3/8	2-17/64	—	3-3/16	18.0	129.0	
54	140J54	J	31.10	30.097	C	4-7/16	4-1/2	5	7-1/4	1-3/16	2-3/8	2-17/64	—	3-3/16	18.0	149.0	
60	140J60	J	34.44	33.437	C	4-7/16	4-1/2	5	7-1/4	1-3/16	2-3/8	2-17/64	—	3-3/16	18.0	186.0	
70	140M70	M	40.02	39.006	C1	5-1/2	6-3/4	6-3/4	9	2-29/32	2-29/32	2-17/32	1-13/32	5-3/16	37.0	264.0	
80	140M80	M	45.59	44.574	C1	5-1/2	6-3/4	6-3/4	9	2-29/32	2-29/32	2-17/32	1-13/32	5-3/16	37.0	348.0	

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.