
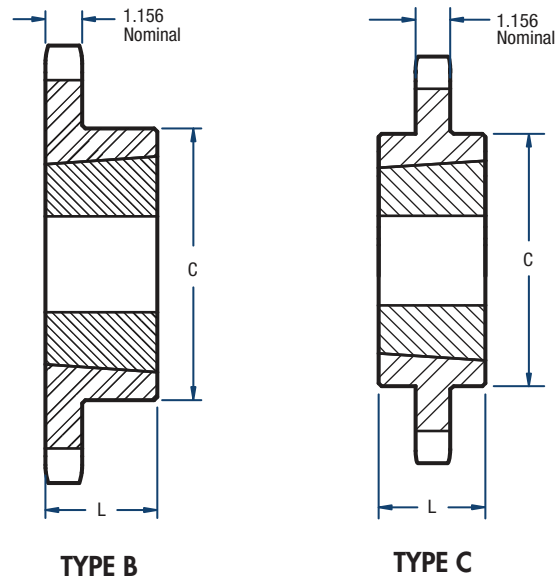


160 Sprockets

2" Pitch

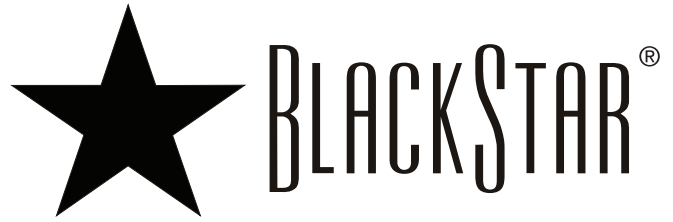

Single- TL Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)		Approx. Weight (lbs)	
			Outside	Pitch			L	C	Bushing Only	Sprocket Only
11	H160BTL11	2517	8.01	7.100	B	2-1/2	1-3/4	4-1/4	3.0	9.0
12	H160BTL12	3020	8.66	7.728	B	3	2	5-1/4	5.4	11.0
13	H160BTL13	3020	9.31	8.358	B	3	2	5-1/4	5.4	13.0
14	H160BTL14	3020	9.96	8.988	B	3	2	5-1/4	5.4	16.0
15	H160BTL15	3535	10.61	9.620	B	3-1/2	3-1/2	6-1/2	12.5	25.0
16	H160BTL16	3535	11.25	10.252	B	3-1/2	3-1/2	6-1/2	12.5	28.0
17	H160BTL17	3535	11.90	10.844	B	3-1/2	3-1/2	6-1/2	12.5	32.0
18	H160BTL18	3535	12.54	11.518	B	3-1/2	3-1/2	6-1/2	12.5	35.0
19	H160BTL19	3535	13.19	12.152	B	3-1/2	3-1/2	6-1/2	12.5	39.0
21	H160BTL21	3535	14.47	13.420	B	3-1/2	3-1/2	6-1/2	12.5	48.0
26	H160BTL26	3535	17.67	16.592	B	3-1/2	3-1/2	6-1/2	12.5	68.0
35	160CTL35	4040	23.42	22.312	C	4	4	7-3/4	17.0	118.0
45	160CTL45	4040	29.80	28.672	C	4	4	7-3/4	17.0	186.0
60	160CTL60	4545	39.36	38.214	C	4-1/2	4-1/2	8-3/4	24.0	292.0

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.