



Double Pitch Sprockets

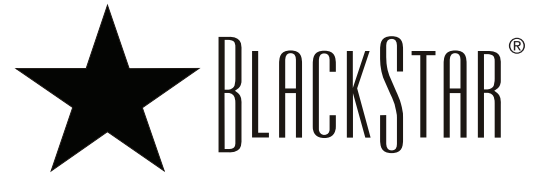

Conveyor or Driver Series— 1 1/4" Double Pitch

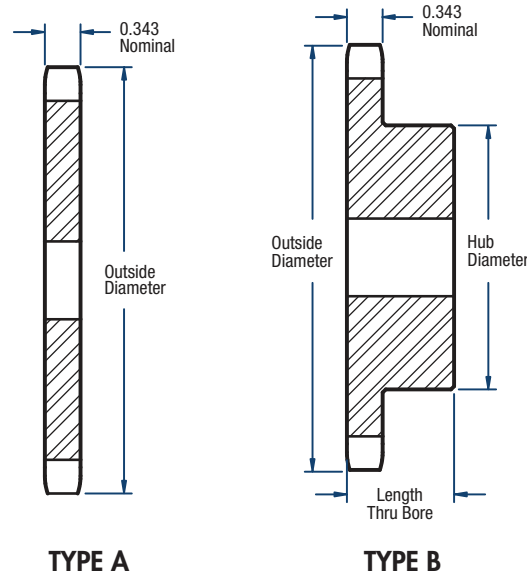

Conveyor or Drive Series- Standard Roller Double Pitch- 2050/C2050

No. of Teeth	Eff. No. Teeth	Diameters (in)		Catalog Number	Type	Bore (in)		Hub (in)		Approx. Weight (lbs)	Type	Catalog Number	Stock Bore	Approx. Weight (lbs)
		Outside	Pitch			Min.	Max.	Diameter	Length Through Bore					
11	5.5	2.50	2.315	2050B11	B	5/8	13/16	1-3/4*	1	0.62	—	—	—	—
12	6	2.71	2.500	2050B12	B	5/8	1	1-63/64	1	0.80	—	—	—	—
13	6.5	2.91	2.690	2050B13	B	5/8	1-7/32	1-23/32	1	0.82	—	—	—	—
14	7	3.11	2.881	2050B14	B	5/8	1-9/32	1-15/16	1	1.00	—	—	—	—
15	7.5	3.32	3.073	2050B15	B	5/8	1-13/32	2-5/32	1	1.22	—	—	—	—
16	8	3.52	3.266	2050B16	B	5/8	1-19/32	2-23/64	1	1.44	—	—	—	—
17	8.5	3.72	3.460	2050B17	B	5/8	1-3/4	2-9/16	1	1.68	—	—	—	—
18	9	3.92	3.655	2050B18	B	5/8	1-25/32	2-25/32	1	1.94	—	—	—	—
19	9.5	4.12	3.850	2050B19	B	5/8	1-31/32	2-63/64	1	2.24	—	—	—	—
20	10	4.32	4.045	2050B20	B	3/4	2	3	1	2.30	—	—	—	—
21	10.5	4.52	4.241	2050B21	B	3/4	2	3	1	2.40	—	—	—	—
22	11	4.72	4.437	2050B22	B	3/4	2	3	1	2.54	—	—	—	—
23	11.5	4.92	4.633	2050B23	B	3/4	2	3	1	2.66	—	—	—	—
24	12	5.12	4.830	2050B24	B	3/4	2	3	1-1/4	3.30	A	2050A24	23/32	1.6
25	12.5	5.32	5.026	2050B25	B	3/4	2	3	1-1/4	3.42	A	2050A25	23/32	1.7
26	13	5.52	5.223	2050B26	B	3/4	2	3	1-1/4	3.62	A	2050A26	23/32	1.9
28	14	5.92	5.617	2050B28	B	3/4	2	3	1-1/4	3.78	A	2050A28	23/32	2.2
30	15	6.32	6.012	2050B30	B	3/4	2-1/4	3-1/4	1-1/4	4.58	A	2050A30	23/32	2.5

*Has recessed groove in hub for chain clearance.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.