



Double Pitch Sprockets

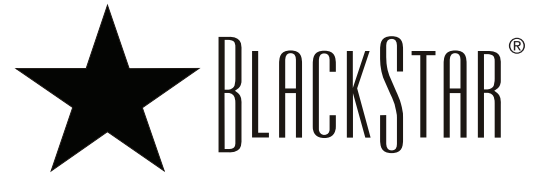

Conveyor or Driver Series— 1 1/4" Double Pitch

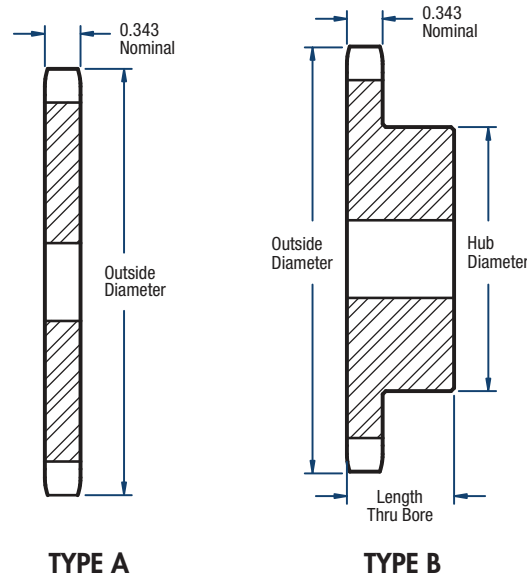

Conveyor Series- Carrier Roller Double Pitch- 2052/C2052

No. of Teeth	Diameters (in)		Catalog Number	Type	Bore (in)		Hub (in)		Approx. Weight (lbs)	Type	Catalog Number	Stock Bore	Approx. Weight (lbs)
	Outside	Pitch			Min.	Max.	Diameter	Length Thru Bore					
8	3.77	3.266	2052B8	B	5/8	1-19/32	2-23/64	1	1.38	—	—	—	—
9	4.19	3.655	2052B9	B	5/8	1-25/32	2-25/64	1	1.92	—	—	—	—
10	4.60	4.045	2052B10	B	5/8	2	3	1	2.30	—	—	—	—
11	5.01	4.437	2052B11	B	5/8	2	3	1	2.54	—	—	—	—
12	5.42	4.830	2052B12	B	3/4	2	3	1-1/4	3.20	A	2052A12	23/32	1.6
13	5.82	5.223	2052B13	B	3/4	2	3	1-1/4	3.48	A	2052A13	23/32	1.8
14	6.23	5.617	2052B14	B	3/4	2	3	1-1/4	3.88	A	2052A14	23/32	2.3
15	6.63	6.012	2052B15	B	3/4	2-1/4	3-1/4	1-1/4	4.46	A	2052A15	23/32	2.5
16	7.03	6.407	2052B16	B	3/4	2-1/4	3-1/4	1-1/4	4.80	A	2052A16	23/32	2.9
17	7.44	6.803	2052B17	B	3/4	2-1/4	3-1/4	1-1/4	5.34	A	2052A17	23/32	3.3
18	7.84	7.198	2052B18	B	3/4	2-1/4	3-1/4	1-1/4	5.64	A	2052A18	23/32	3.6
19	8.24	7.595	2052B19	B	3/4	2-1/4	3-1/4	1-1/4	6.04	A	2052A19	23/32	4.1
20	8.64	7.991	2052B20	B	3/4	2-1/4	3-1/4	1-1/4	6.48	A	2052A20	23/32	4.7
21	9.04	8.387	2052B21	B	3/4	2-1/4	3-1/4	1-1/4	7.00	A	2052A21	23/32	5.1
22	9.44	8.783	2052B22	B	3/4	2-1/4	3-1/4	1-1/4	7.30	A	2052A22	23/32	5.2
23	9.85	9.180	2052B23	B	1	2-3/4	3-3/4	1-1/4	8.66	A	2052A23	15/16	5.8
24	10.25	9.577	2052B24	B	15/16	2-3/4	3-3/4	1-1/4	9.32	A	2052A24	15/16	6.7
25	10.65	9.973	2052B25	B	15/16	2-3/4	3-3/4	1-1/4	10.30	A	2052A25	15/16	7.5
26	11.05	10.370	2052B26	B	15/16	2-3/4	3-3/4	1-1/4	11.00	A	2052A26	15/16	8.2
28	11.84	11.164	2052B28	B	15/16	2-3/4	3-3/4	1-1/4	11.70	A	2052A28	15/16	8.7
30	12.64	11.958	2052B30	B	15/16	2-3/4	3-3/4	1-1/4	12.90	A	2052A30	15/16	9.9

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.