



Double Pitch Sprockets

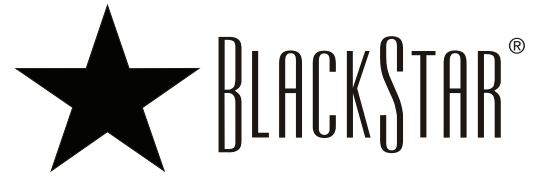

Conveyor or Driver Series— 1 1/2" Double Pitch

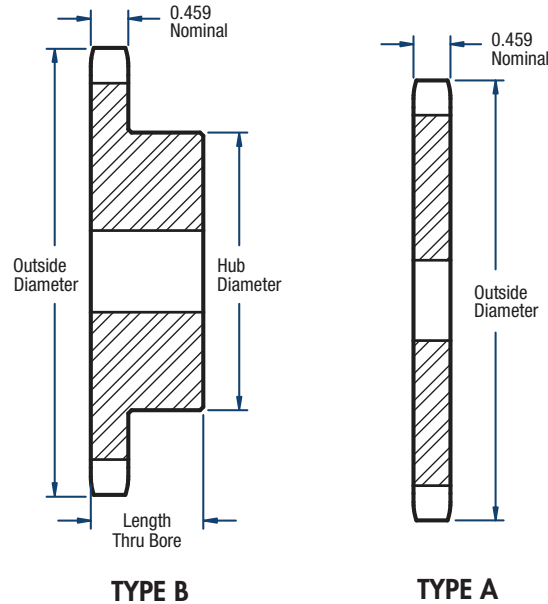

Conveyor or Drive Series- Standard Roller Double Pitch- 2060/C2060

No. of Teeth	Eff. No. Teeth	Diameters (in)		Catalog Number	Type	Bore (in)		Hub (in)		Approx. Weight (lbs)	Type	Catalog Number	Stock Bore	Approx. Weight (lbs)
		Outside	Pitch			Min.	Max.	Diameter	Length Through Bore					
11	5.5	3.00	2.773	2060B11	B	3/4	1	2-1/16*	1-1/4	1.14	—	—	—	—
12	6	3.25	3.000	2060B12	B	3/4	1-1/4	2-3/8*	1-1/4	1.46	—	—	—	—
13	6.5	3.49	3.228	2060B13	B	3/4	1-5/16	2-5/64	1-1/4	1.52	—	—	—	—
14	7	3.74	3.457	2060B14	B	3/4	1-9/16	2-21/64	1-1/4	1.86	—	—	—	—
15	7.5	3.98	3.688	2060B15	B	3/4	1-3/4	2-19/32	1-1/4	2.24	—	—	—	—
16	8	4.22	3.920	2060B16	B	3/4	1-27/32	2-27/32	1-1/4	2.64	—	—	—	—
17	8.5	4.46	4.152	2060B17	B	3/4	2-3/32	3-3/32	1-1/4	3.08	—	—	—	—
18	9	4.70	4.386	2060B18	B	3/4	2-9/32	3-11/32	1-1/4	3.56	—	—	—	—
19	9.5	4.94	4.620	2060B19	B	3/4	2-11/32	3-1/2	1-1/4	3.94	—	—	—	—
20	10	5.19	4.854	2060B20	B	3/4	2-9/16	3-7/8	1-1/4	4.50	—	—	—	—
21	10.5	5.43	5.089	2060B21	B	3/4	2-3/4	4	1-1/4	5.02	—	—	—	—
22	11	5.67	5.324	2060B22	B	3/4	2-3/4	4	1-1/4	5.26	—	—	—	—
23	11.5	5.91	5.560	2060B23	B	3/4	2-3/4	4	1-1/4	5.54	—	—	—	—
24	12	6.15	5.796	2060B24	B	3/4	2-3/4	4	1-1/4	5.90	A	2060A24	23/32	3.0
25	12.5	6.39	6.032	2060B25	B	3/4	2-3/4	4	1-1/4	6.08	A	2060A25	23/32	3.4
26	13	6.63	6.268	2060B26	B	3/4	2-3/4	4	1-1/4	6.36	A	2060A26	23/32	3.7
28	14	7.11	6.741	2060B28	B	3/4	2-3/4	4	1-1/4	7.02	A	2060A28	23/32	4.1
30	15	7.59	7.215	2060B30	B	3/4	2-3/4	4	1-1/4	7.54	A	2060A30	23/32	4.9

*Has recessed groove in hub for chain clearance.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.