



Double Pitch Sprockets

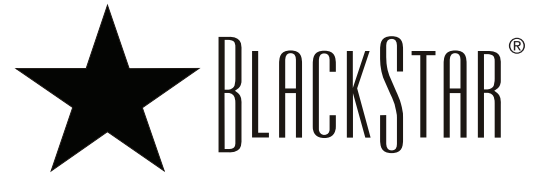

Conveyor or Driver Series— 2" Double Pitch

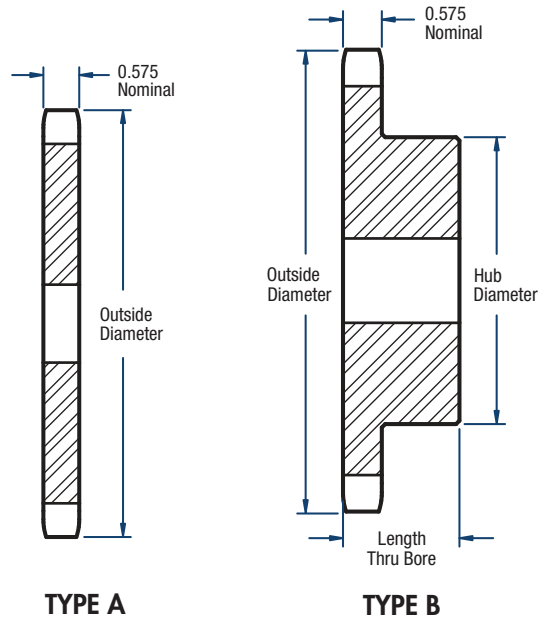

Conveyor or Drive Series- Standrad Roller Double Pitch- 2080/C2080

No. of Teeth	Eff. No. Teeth	Diameters (in)		Catalog Number	Type	Bore (in)		Hub (in)		Approx. Weight (lbs)	Type	Catalog Number	Stock Bore (in)	Approx. Weight (lbs)
		Outside	Pitch			Min.	Max.	Diameter	Length Through Bore					
11	5.5	4.01	3.694	2080B11	B	1	1-1/2	2-13/16*	1-5/8	2.5	—	—	—	—
12	6	4.33	4.000	2080B12	B	1	1-11/16	3-1/8*	1-5/8	3.2	—	—	—	—
13	6.5	4.66	4.304	2080B13	B	1	1-25/32	2-25/32	1-1/2	3.3	—	—	—	—
14	7	4.98	4.610	2080B14	B	1	2-1/8	3-1/8	1-1/2	4.0	—	—	—	—
15	7.5	5.30	4.917	2080B15	B	1	2-9/32	3-29/64	1-1/2	4.8	—	—	—	—
16	8	5.63	5.226	2080B16	B	1	2-17/32	3-51/64	1-1/2	5.7	—	—	—	—
17	8.5	5.95	5.536	2080B17	B	1	2-3/4	4-1/4	1-1/2	6.4	A	2080A17	15/16	3.4
18	9	6.27	5.848	2080B18	B	1	2-3/4	4-1/4	1-1/2	7.4	A	2080A18	15/16	3.8
19	9.5	6.59	6.160	2080B19	B	1	2-3/4	4-1/4	1-1/2	7.7	A	2080A19	15/16	4.3
20	10	6.91	6.472	2080B20	B	1	2-3/4	4-1/4	1-1/2	8.3	A	2080A20	15/16	4.8
21	10.5	7.23	6.785	2080B21	B	1	2-3/4	4-1/4	1-3/4	9.4	A	2080A21	15/16	5.3
22	11	7.56	7.099	2080B22	B	1	2-3/4	4-1/4	1-3/4	10.0	A	2080A22	15/16	5.8
23	11.5	7.88	7.413	2080B23	B	1	2-3/4	4-1/4	1-3/4	10.5	A	2080A23	15/16	6.4
24	12	8.20	7.727	2080B24	B	1	2-3/4	4-1/4	1-3/4	11.1	A	2080A24	15/16	7.1
25	12.5	8.52	8.042	2080B25	B	1	2-3/4	4-1/4	1-3/4	12.0	A	2080A25	15/16	7.5
26	13	8.84	8.357	2080B26	B	1-1/4	3-1/4	4-3/4	2	14.8	A	2080A26	1-3/16	8.3
28	14	9.48	8.988	2080B28	B	1-3/16	3-1/4	4-3/4	2	16.6	A	2080A28	1-3/16	9.2
30	15	10.11	9.620	2080B30	B	1-3/16	3-1/4	4-3/4	2	17.8	A	2080A30	1-3/16	10.7

*Has recessed groove in hub for chain clearance.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.