


41 Sprockets


1/2" Pitch



BLACKSTAR®

Single- Type B

No. of Teeth	Catalog Number	Diameters (in)		Bore (in)		Hub (in)		Approx. Weight (lbs)
		Outside	Pitch	Min.	Max.	Dia.	Length Through Bore	
6	H41B6	1.17	1.000	3/8	3/8	21/32*	7/8	0.07
7	H41B7	1.34	1.152	3/8	3/8	3/4*	7/8	0.10
8	H41B8	1.51	1.307	1/2	1/2	63/64*	7/8	0.19
9	H41B9	1.67	1.462	1/2	5/8	1-1/8*	7/8	0.20
10	H41B10	1.84	1.618	1/2	3/4	1-1/4*	7/8	0.27
11	H41B11	2.00	1.775	1/2	7/8	1-7/16*	7/8	0.35
12	H41B12	2.17	1.932	1/2	15/16	1-9/16*	7/8	0.44
13	H41B13	2.33	2.089	1/2	1	1-9/16	7/8	0.50
14	H41B14	2.49	2.247	1/2	1-1/4	1-3/4	7/8	0.57
15	H41B15	2.65	2.405	1/2	1-5/16	1-29/32	7/8	0.72
16	H41B16	2.81	2.563	5/8	1-3/8	2-1/16	7/8	0.91
17	H41B17	2.98	2.721	5/8	1-1/2	2-15/64	1	1.09
18	H41B18	3.14	2.879	5/8	1-5/8	2-3/8	1	1.25
19	H41B19	3.30	3.038	5/8	1-3/4	2-15/32	1	1.49
20	H41B20	3.46	3.196	5/8	1-7/8	2-3/4	1	1.64
21	H41B21	3.62	3.355	5/8	2	2-7/8	1	1.81
22	H41B22	3.78	3.513	5/8	2-1/4	3	1	1.93
23	H41B23	3.94	3.672	5/8	2-1/4	3-3/16	1	2.25
24	H41B24	4.10	3.831	5/8	2-1/4	3-1/4	1	2.33
25	H41B25	4.26	3.989	5/8	2-1/4	3-1/4	1	2.46
26	H41B26	4.42	4.148	5/8	2-1/4	3-1/4	1	2.50
27	H41B27	4.58	4.307	5/8	2-1/4	3-1/4	1	2.56
28	H41B28	4.74	4.465	5/8	2-1/4	3-1/4	1	2.64
30	H41B30	5.06	4.783	5/8	2-1/4	3-1/4	1	2.80
32	41B32	5.38	5.101	5/8	2-1/4	3-1/4	1	2.96
35	41B35	5.86	5.578	5/8	2-3/8	3-1/4	1	3.12
36	41B36	6.02	5.737	5/8	2-3/8	3-1/4	1	3.32
40	41B40	6.65	6.373	3/4	2-3/8	3-1/4	1-1/16	4.06
42	41B42	6.97	6.691	3/4	2-3/8	3-1/2	1-1/16	4.10
45	41B45	7.45	7.168	3/4	2-3/8	3-1/2	1-1/16	4.18
48	41B48	7.93	7.645	3/4	2-3/8	3-1/2	1-1/16	4.92
54	41B54	8.89	8.599	3/4	2-3/8	3-1/2	1-1/16	5.68
60	41B60	9.84	9.554	3/4	2-3/8	3-1/2	1-1/16	6.78
70	41B70	11.43	11.145	3/4	2-3/4	4	1-3/16	9.54
72	41B72	11.75	11.463	3/4	2-3/4	4	1-3/16	9.64
80	41B80	13.03	12.736	3/4	2-3/4	4	1-3/16	11.54
84	41B84	13.66	13.372	3/4	2-3/4	4	1-3/16	12.20
96	41B96	15.57	15.282	1	2-3/4	4	1-3/16	14.86
112	41B112	18.12	17.827	1	2-3/4	4	1-3/16	19.16

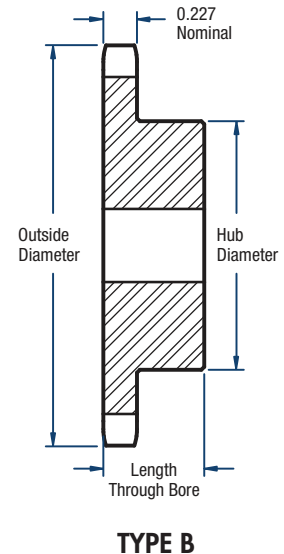

*Has recessed groove in the hub for chain clearance.
Sprockets with "H" prefix have hardened teeth.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.