



# 50 Sprockets

## 5/8" Pitch



# BLACKSTAR®

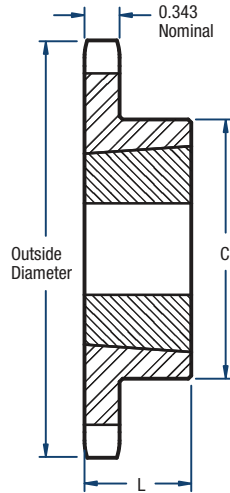

TYPE B

### Single- TL Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)		Approx. Weight (lbs)	
			Outside	Pitch			L	C	Bushing Only	Sprocket Only
12	H50BTL12	1008	2.71	2.415	B	1	7/8	1-15/16*	0.3	0.5
13	H50BTL13	1008	2.91	2.612	B	1	7/8	1-13/16	0.3	0.5
14	H50BTL14	1008	3.11	2.809	B	1	7/8	1-15/16	0.3	0.6
15	H50BTL15	1210	3.32	3.006	B	1-1/4	1	2-15/32*	0.6	0.7
16	H50BTL16	1610	3.52	3.204	B	1-5/8	1	2-25/32*	0.9	0.7
17	H50BTL17	1610	3.72	3.401	B	1-5/8	1	2-25/32*	0.9	0.8
18	H50BTL18	1610	3.92	3.599	B	1-5/8	1	2-25/32	0.9	0.9
19	H50BTL19	1610	4.12	3.798	B	1-5/8	1	3	0.9	1.3
20	H50BTL20	1610	4.32	3.995	B	1-5/8	1	3-1/4	0.9	1.6
21	H50BTL21	1610	4.52	4.194	B	1-5/8	1	3	0.9	1.5
22	H50BTL22	1610	4.72	4.392	B	1-5/8	1	3	0.9	1.6
23	H50BTL23	2012	4.92	4.590	B	2	1-1/4	3-9/16	1.7	2.0
24	H50BTL24	2012	5.12	4.788	B	2	1-1/4	3-9/16	1.7	2.2
25	H50BTL25	2012	5.32	4.987	B	2	1-1/4	3-9/16	1.7	2.4
26	H50BTL26	2012	5.52	5.185	B	2	1-1/4	3-9/16	1.7	2.5
27	H50BTL27	2012	5.72	5.384	B	2	1-1/4	3-9/16	1.7	2.6
28	H50BTL28	2012	5.92	5.582	B	2	1-1/4	3-9/16	1.7	2.8
30	H50BTL30	2012	6.32	5.979	B	2	1-1/4	3-9/16	1.7	3.2
32	50BTL32	2012	6.72	6.376	B	2	1-1/4	3-9/16	1.7	3.6
35	50BTL35	2012	7.32	6.973	B	2	1-1/4	3-9/16	1.7	4.2
36	50BTL36	2012	7.52	7.171	B	2	1-1/4	3-9/16	1.7	4.3
40	50BTL40	2012	8.32	7.966	B	2	1-1/4	3-9/16	1.7	5.2
42	50BTL42	2012	8.72	8.364	B	2	1-1/4	3-9/16	1.7	5.9
45	50BTL45	2012	9.31	8.960	B	2	1-1/4	3-9/16	1.7	6.5
48	50BTL48	2012	9.91	9.556	B	2	1-1/4	3-9/16	1.7	7.3
54	50BTL54	2012	11.11	10.749	B	2	1-1/4	3-9/16	1.7	9.0
60	50BTL60	2012	12.30	11.942	B	2	1-1/4	3-9/16	1.7	10.8
70	50BTL70	2517	14.29	13.931	B	2-1/2	1-3/4	4-1/4	3.5	14.0
72	50BTL72	2517	14.69	14.329	B	2-1/2	1-3/4	4-1/4	3.5	15.5
80	50BTL80	2517	16.28	15.919	B	2-1/2	1-3/4	4-1/4	3.5	19.5
84	50BTL84	2517	17.08	16.715	B	2-1/2	1-3/4	4-1/4	3.5	22.5
96	50BTL96	2517	19.47	19.102	B	2-1/2	1-3/4	4-1/4	3.5	29.0
112	50BTL112	2517	22.65	22.284	B	2-1/2	1-3/4	4-1/4	3.5	38.7

\*Has recessed groove in the hub for chain clearance.

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.