



60 Sprockets

3/4" Pitch



BLACKSTAR®

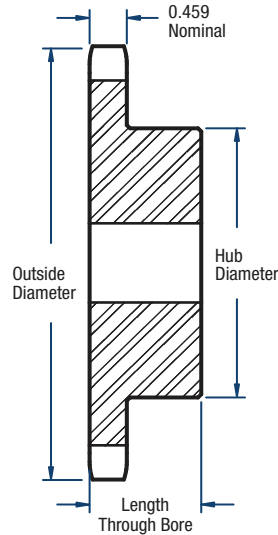

TYPE B

Single- Type B

No. of Teeth	Catalog Number	Diameters (in)		Bore (in)		Hub (in)		Approx. Weight (lbs)
		Outside	Pitch	Min.	Max.	Diameter	Length Through Bore	
8	H60B8	2.26	1.960	5/8	5/8	1-15/32*	1-1/4	0.54
9	H60B9	2.51	2.193	3/4	7/8	1-9/16*	1-1/4	0.64
10	H60B10	2.76	2.427	3/4	1-1/8	1-15/16*	1-1/4	0.99
11	H60B11	3.00	2.663	3/4	1-5/16	2-1/16*	1-1/4	1.16
12	H60B12	3.25	2.898	3/4	1-3/8	2-3/8*	1-1/4	1.50
13	H60B13	3.49	3.134	3/4	1-1/2	2-11/32	1-1/4	1.71
14	H60B14	3.74	3.371	3/4	1-3/4	2-9/16	1-1/4	2.05
15	H60B15	3.98	3.608	3/4	1-7/8	2-7/8	1-1/4	2.51
16	H60B16	4.22	3.845	3/4	2	3-1/16	1-1/4	2.88
17	H60B17	4.46	4.082	3/4	2-1/4	3-1/4	1-1/4	3.27
18	H60B18	4.70	4.319	3/4	2-3/8	3-1/2	1-1/4	3.77
19	H60B19	4.95	4.557	3/4	2-3/8	3-1/2	1-1/4	3.98
20	H60B20	5.19	4.794	3/4	2-5/8	3-7/8	1-1/4	4.69
21	H60B21	5.43	5.033	3/4	2-3/4	4	1-1/4	5.10
22	H60B22	5.67	5.270	3/4	2-3/4	4	1-1/4	5.34
23	H60B23	5.91	5.508	3/4	2-3/4	4	1-1/4	5.59
24	H60B24	6.15	5.746	3/4	2-3/4	4	1-1/4	5.59
25	H60B25	6.39	5.984	3/4	2-3/4	4	1-1/4	6.13
26	H60B26	6.63	6.222	3/4	2-3/4	4	1-1/4	6.42
28	H60B28	7.11	6.698	3/4	2-3/4	4	1-1/4	7.03
30	H60B30	7.59	7.175	3/4	2-3/4	4	1-1/4	7.69
32	60B32	8.07	7.652	3/4	2-3/4	4	1-1/4	5.26
35	60B35	8.78	8.367	1	2-3/4	4	1-1/4	9.41
36	60B36	9.02	8.606	1	2-3/4	4	1-1/4	9.60
40	60B40	9.98	9.560	1	2-3/4	4-1/4	1-1/4	11.91
45	60B45	11.18	10.752	1	2-3/4	4-1/4	1-1/4	14.34
60	60B60	14.76	14.330	1-1/4	2-3/4	4-1/4	1-3/4	25.05

*Has recessed groove in the hub for chain clearance.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.