



Sheaves

8B/QD STYLE

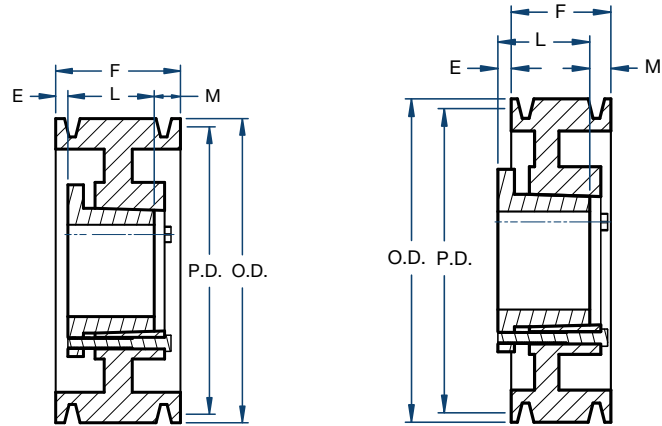

BLACKSTAR®



Type A

Type D

Part No.	Bushing	Bore Range (in)	Type	Diameter (in)			Dimensions (in)				Weight less Bore (lbs)
				Pitch B	Pitch A	Outside	E	F	L	M	
8B54SK	SK	1/2 – 2-5/8	A	5.4	5.0	5.75	1-1/32	6-1/4	1-15/16	3-9/32	15.0
8B56SK	SK	1/2 – 2-5/8	A	5.6	5.2	5.95	1-1/32	6-1/4	1-15/16	3-9/32	16.0
8B60SF	SF	1/2 – 2-15/16	A	6.0	5.6	6.35	31/32	6-1/4	2-1/16	3-7/32	20.0
8B62SF	SF	1/2 – 2-15/16	A	6.4	6.0	6.75	31/32	6-1/4	2-1/16	3-7/32	23.0
8B68SF	SF	1/2 – 2-15/16	A	6.8	6.4	7.15	31/32	6-1/4	2-1/16	3-7/32	25.0
8B74SF	SF	1/2 – 2-15/16	A	7.4	7.0	7.75	31/32	6-1/4	2-1/16	3-7/32	28.0
8B86E	E	7/8 – 3-1/2	A	8.6	8.2	8.95	1-7/32	6-1/4	2-3/4	2-9/32	40.0
8B94E	E	7/8 – 3-1/2	A	9.4	9.0	9.75	1-7/32	6-1/4	2-3/4	2-9/32	43.0
8B110E	E	7/8 – 3-1/2	A	11.0	10.6	11.35	1-7/32	6-1/4	2-3/4	2-9/32	49.0
8B124E	E	7/8 – 3-1/2	A	12.4	12.0	12.75	1-7/32	6-1/4	2-3/4	2-9/32	56.0
8B154E	E	7/8 – 3-1/2	A	15.4	15.0	15.75	1-7/32	6-1/4	2-3/4	2-9/32	69.0
8B184F	F	1 – 4	D	18.4	18.0	18.75	1/32	6-1/4	3-3/4	2-17/32	91.0
8B200F	F	1 – 4	D	20.0	19.6	20.35	1/32	6-1/4	3-3/4	2-17/32	98.0
8B250F	F	1 – 4	D	25.0	24.6	25.35	1/32	6-1/4	3-3/4	2-17/32	121.0
8B300F	F	1 – 4	D	30.0	29.6	30.35	1/32	6-1/4	3-3/4	2-17/32	148.0
8B380F	F	1 – 4	D	38.0	37.6	38.35	1/32	6-1/4	3-3/4	2-17/32	194.0