


# D40 Sprockets

## 1/2" Pitch



# BLACKSTAR®

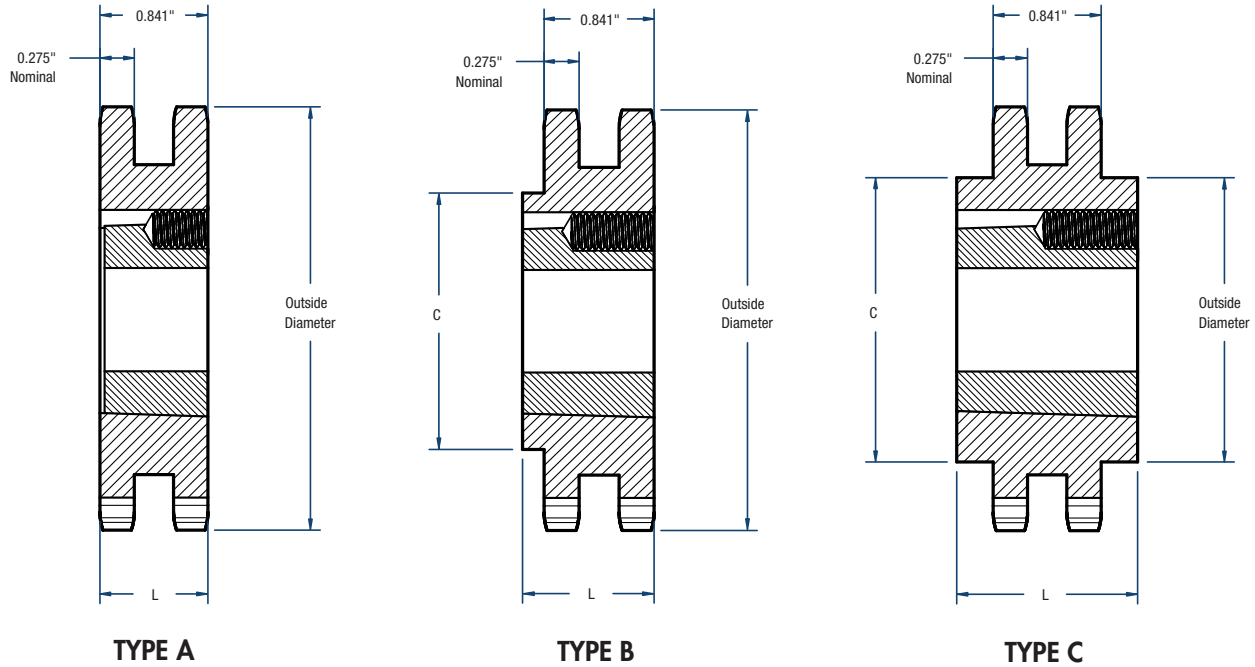

### Double- TL Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)		Approx. Weight (lbs)	
			Outside Diameter	Pitch Diameter			L	C	Bushing Only	Sprocket Only
15	D40ATL15H	1008	2.65	2.405	A	1	7/8	1-17/64	0.3	0.5
16	D40ATL16H	1008	2.81	2.563	A	1	7/8	1-17/64	0.3	0.6
17	D40ATL17H	1008	2.98	2.721	A	1	7/8	1-17/64	0.3	0.7
18	D40BTL18H	1210	3.14	2.879	B	1-1/4	1	2-5/16	0.6	0.7
19	D40BTL19H	1210	3.30	3.038	B	1-1/4	1	2-1/2	0.6	0.9
20	D40BTL20H	1610	3.46	3.196	B	1-5/8	1	2-5/8	0.9	0.9
21	D40BTL21H	1610	3.62	3.355	B	1-5/8	1	2-3/4	0.9	1.0
23	D40BTL23H	1610	3.94	3.672	B	1-5/8	1	3	0.9	1.3
25	D40BTL25H	2012	4.26	3.989	B	2	1-1/4	3-13/32	1.7	1.6
30	D40BTL30H	2012	5.06	4.783	B	2	1-1/4	4-15/64	1.7	3.4
36	D40BTL36	2012	6.02	5.737	B	2	1-1/4	5-5/32	1.7	5.9
42	D40CTL42	2517	6.97	6.691	C	2-1/2	1-3/4	4-1/4	3.5	7.0
48	D40CTL48	2517	7.93	7.645	C	2-1/2	1-3/4	4-1/4	3.5	9.6
52	D40CTL52	2517	8.57	8.281	C	2-1/2	1-3/4	4-1/4	3.5	11.4
60	D40CTL60	2517	9.84	9.554	C	2-1/2	1-3/4	4-1/4	3.5	15.4
68	D40CTL68	2517	11.12	10.826	C	2-1/2	1-3/4	4-1/4	3.5	20.5
76	D40CTL76	2517	12.39	12.099	C	2-1/2	1-3/4	4-1/4	3.5	25.7
84	D40CTL84	2517	13.66	13.372	C	2-1/2	1-3/4	4-1/4	3.5	31.6
95	D40CTL95	2517	15.41	15.122	C	2-1/2	1-3/4	4-1/4	3.5	34.1
102	D40CTL102	2517	16.53	16.236	C	2-1/2	1-3/4	4-1/4	3.5	36.8

Sprockets with "H" suffix have hardened teeth.

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.