


D40 Sprockets

1/2" Pitch



BLACKSTAR®

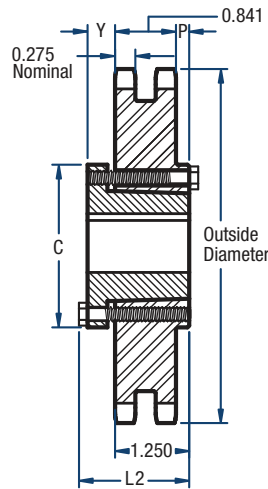

TYPE C

Double- QD Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)				Approx. Weight (lbs)	
			Outside Diameter	Pitch Diameter			L2	C	Y	P	Bushing Only	Sprocket Only
36	D40SK36	SK	6.02	5.737	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	4.68
40	D40SK40	SK	6.65	6.373	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	6.02
42	D40SK42	SK	6.97	6.691	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	6.82
45	D40SK45	SK	7.45	7.168	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	7.98
48	D40SK48	SK	7.93	7.645	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	9.22
52	D40SK52	SK	8.57	8.281	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	11.04
54	D40SK54	SK	8.89	8.599	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	12.06
60	D40SK60	SK	9.84	9.554	C	2-5/8	2-1/8	3-7/8	5/8	13/32	2.0	14.98
68	D40SF68	SF	11.12	10.826	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	19.72
72	D40SF72	SF	11.75	11.463	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	22.20
76	D40SF76	SF	12.39	12.099	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	25.20
84	D40SF84	SF	13.66	13.372	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	30.64
95	D40SF95	SF	15.41	15.122	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	37.22
102	D40SF102	SF	16.53	16.236	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	39.70
112	D40SF112	SF	18.12	17.827	C	2-15/16	2-1/4	4-5/8	3/4	13/32	3.0	49.60

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.