


DS50 Sprockets

5/8" Pitch



BLACKSTAR®

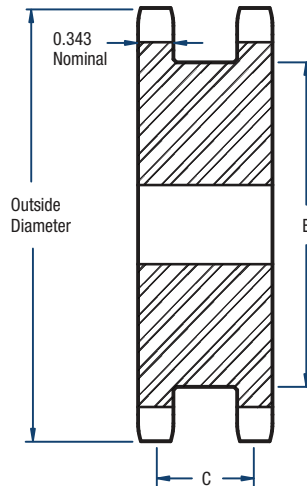

TYPE A

Double Single- Type A

No. of Teeth	Catalog Number	Diameters (in)		Bore (in)		C	E	Apprx. Weight (lbs)
		Outside	Pitch	Min.	Max.			
15	DS50A15H	3.32	3.006	5/8	1-1/2	1-3/16	2-3/8	2.1
16	DS50A16H	3.52	3.204	5/8	1-11/16	1-5/16	2-1/2	2.4
17	DS50A17H	3.72	3.401	5/8	1-3/4	1-5/16	2-11/16	2.9
18	DS50A18H	3.92	3.599	5/8	1-7/8	1-5/16	2-57/64	3.3
19	DS50A19H	4.12	3.798	5/8	2-1/16	1-5/16	3-5/64	3.7
20	DS50A20H	4.32	3.995	5/8	2-1/4	1-5/16	3-9/32	4.2
21	DS50A21H	4.52	4.194	5/8	2-1/4	1-5/16	3-31/64	4.8
22	DS50A22H	4.72	4.392	5/8	2-7/16	1-5/16	3-11/16	5.3
23	DS50A23H	4.92	4.590	5/8	2-5/8	1-5/16	3-57/64	5.8
24	DS50A24H	5.12	4.788	5/8	2-3/4	1-5/16	4-5/64	6.3

Sprockets with "H" suffix have hardened teeth.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.