


# D50 Sprockets

## 5/8" Pitch



# BLACKSTAR®

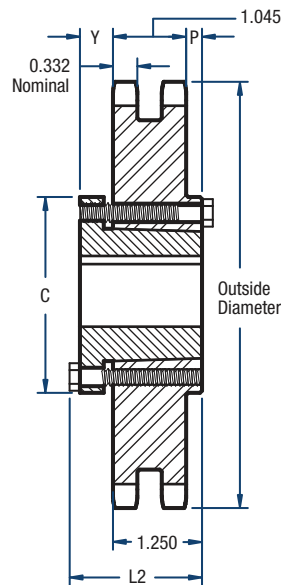

TYPE C

### Double- QD Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Max. Bore	Dimensions (in)				Approx. Weight (lbs)	
			Outside	Pitch			L2	C	Y	P	Bushing Only	Sprocket Only
36	D50SK36	SK	7.52	7.171	C	2-5/8	2-1/8	3-7/8	5/8	13/64	2.0	9.9
42	D50SK42	SK	8.72	8.364	C	2-5/8	2-1/8	3-7/8	5/8	13/64	2.0	13.2
48	D50SK48	SK	9.91	9.556	C	2-5/8	2-1/8	3-7/8	5/8	13/64	2.0	17.9
52	D50SF52	SF	10.71	10.351	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	21.3
54	D50SF54	SF	11.11	10.749	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	23.2
60	D50SF60	SF	12.30	11.942	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	29.1
68	D50SF68	SF	13.89	13.533	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	38.2
72	D50SF72	SF	14.69	14.329	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	43.3
76	D50SF76	SF	15.49	15.124	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	44.0
84	D50SF84	SF	17.08	16.715	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	45.0
95	D50SF95	SF	19.27	18.903	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	58.9
102	D50SF102	SF	20.66	20.296	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	66.0
112	D50SF112	SF	22.65	22.284	C	2-15/16	2-1/4	4-5/8	3/4	13/64	3.0	85.3

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.