



D60 Sprockets

3/4" Pitch



BLACKSTAR®

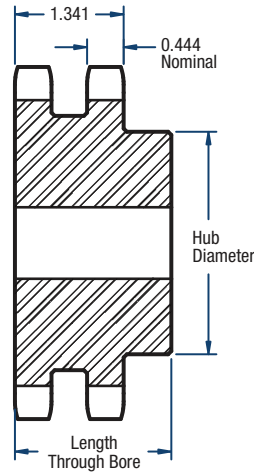

TYPE B

Double- Type B

| No. of Teeth | Catalog Number | Diameters (in) | | Bore (in) | | Hub (in) | | Approx. Weight (lbs) |
|--------------|----------------|----------------|--------|-----------|---------|----------|---------------------|----------------------|
| | | Outside | Pitch | Minimum | Maximum | Diameter | Length Through Bore | |
| 11 | D60B11H | 3.00 | 2.663 | 1 | 1-1/4 | 1-13/16 | 2-1/8 | 1.6 |
| 12 | D60B12H | 3.25 | 2.898 | 1 | 1-7/16 | 2-1/8 | 2-1/8 | 2.2 |
| 13 | D60B13H | 3.49 | 3.134 | 1 | 1-1/2 | 2-1/4 | 2-1/8 | 2.6 |
| 14 | D60B14H | 3.74 | 3.371 | 1 | 1-3/4 | 2-1/2 | 2-1/8 | 3.2 |
| 15 | D60B15H | 3.98 | 3.608 | 1 | 1-7/8 | 2-13/16 | 2-1/8 | 4.0 |
| 16 | D60B16H | 4.22 | 3.845 | 1 | 2 | 3 | 2-1/8 | 4.6 |
| 17 | D60B17H | 4.46 | 4.082 | 1 | 2-1/4 | 3-1/4 | 2-1/8 | 5.4 |
| 18 | D60B18H | 4.70 | 4.319 | 1 | 2-3/8 | 3-1/2 | 2-1/8 | 6.2 |
| 19 | D60B19H | 4.95 | 4.557 | 1 | 2-1/2 | 3-11/16 | 2-1/8 | 7.0 |
| 20 | D60B20H | 5.19 | 4.794 | 1 | 2-1/2 | 3-3/4 | 2-1/8 | 7.7 |
| 21 | D60B21H | 5.43 | 5.033 | 1 | 2-3/4 | 4-1/8 | 2-1/8 | 8.8 |
| 22 | D60B22H | 5.67 | 5.270 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 9.7 |
| 23 | D60B23H | 5.91 | 5.508 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 10.3 |
| 24 | D60B24H | 6.15 | 5.746 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 11.1 |
| 25 | D60B25H | 6.39 | 5.984 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 12.0 |
| 26 | D60B26H | 6.63 | 6.222 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 12.7 |
| 30 | D60B30H | 7.59 | 7.175 | 1 | 2-3/4 | 4-1/4 | 2-1/8 | 16.4 |
| 32 | D60B32 | 8.07 | 7.652 | 1-1/4 | 3 | 4-1/2 | 2-3/8 | 19.5 |
| 35 | D60B35 | 8.78 | 8.367 | 1-1/4 | 3 | 4-1/2 | 2-3/8 | 22.8 |
| 36 | D60B36 | 9.02 | 8.606 | 1-1/4 | 3 | 4-1/2 | 2-3/8 | 23.8 |
| 40 | D60B40 | 9.98 | 9.560 | 1-1/4 | 3-1/4 | 4-3/4 | 2-3/4 | 30.8 |
| 42 | D60B42 | 10.46 | 10.037 | 1-1/4 | 3-1/4 | 4-3/4 | 2-3/4 | 33.1 |
| 45 | D60B45 | 11.18 | 10.752 | 1-1/4 | 3-1/4 | 4-3/4 | 2-3/4 | 37.1 |
| 52 | D60B52 | 12.85 | 12.422 | 1-1/4 | 3-1/4 | 4-3/4 | 2-3/4 | 48.7 |
| 60 | D60B60 | 14.76 | 14.330 | 1-1/4 | 3-1/4 | 4-3/4 | 2-3/4 | 63.1 |

Sprockets with "H" suffix have hardened teeth.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.