


# DS100 Sprockets

## 1 1/4" Pitch



# BLACKSTAR®

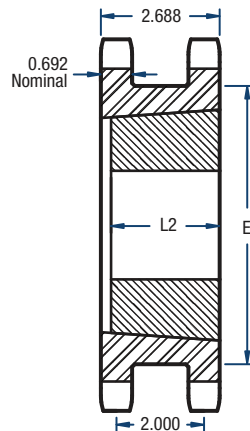

TYPE A

### Double Single- TL Style

No. of Teeth	Catalog Number	Bushing Size	Diameters (in)		Type	Bore (in)		Dimensions (in)		Approx. Weight (lbs)	
			Outside	Pitch		Min.	Max.	E	L2	Bushing Only	Sprocket Only
15	DS100ATL15H	2517	6.63	6.013	A	3/4	2-1/2	4-19/32	1-3/4	1.7	12.5
16	DS100ATL16H	2517	7.03	6.408	A	3/4	2-1/2	5	1-3/4	1.7	13.0
17	DS100ATL17H	3020	7.44	6.803	A	15/16	3	5-13/32	2	6.5	14.0
18	DS100ATL18H	3020	7.84	7.199	A	15/16	3	5-51/64	2	6.5	16.0
19	DS100ATL19H	3020	8.24	7.595	A	15/16	3	6-13/64	2	6.5	20.0
20	DS100ATL20H	3020	8.64	7.990	A	15/16	3	6-39/64	2	6.5	23.5
21	DS100ATL21H	3020	9.04	8.388	A	15/16	3	7	2	6.5	27.5

Sprockets with "H" suffix have hardened teeth.

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.