


# DS50 Sprockets

## 5/8" Pitch



# BLACKSTAR®

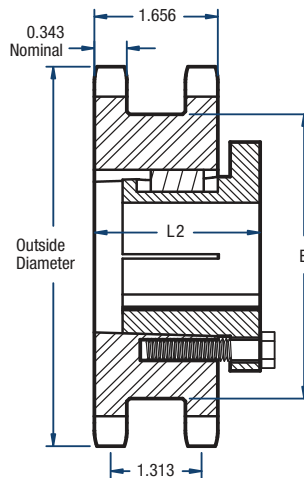

TYPE B

### Double Single- Split Taper Style

No. of Teeth	Catalog Number	Bushing	Diameters (in)		Type	Bore (in)		Dimensions (in)		Approx. Weight (lbs)	
			Outside	Pitch		Min.	Max.	E	L2	Bushing Only	Sprocket Only
17	DS50H17H	H	3.72	3.401	B	3/8	1-1/2	2-11/16	2-9/32	0.8	2.3
19	DS50P19H	P1	4.12	3.798	B	1/2	1-3/4	3-5/64	2-17/32	1.3	2.8
21	DS50P21H	P1	4.52	4.194	B	1/2	1-3/4	3-31/64	2-17/32	1.3	3.8
23	DS50P23H	P1	4.92	4.590	B	1/2	1-3/4	3-57/64	2-17/32	1.3	4.6
24	DS50P24H	P1	5.12	4.788	B	1/2	1-3/4	4-5/64	2-17/32	1.3	5.0

Sprockets with "H" prefix have hardened teeth.

**NOTE:** Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.