



Gear Rack

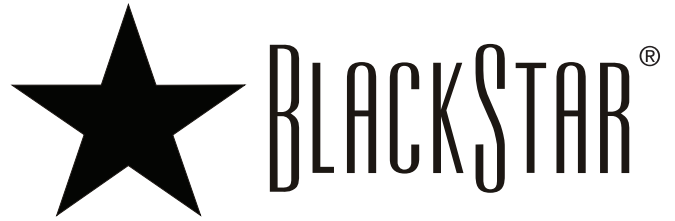

Standard Face Width

Steel — 14 1/2° & 20° Pressure Angle

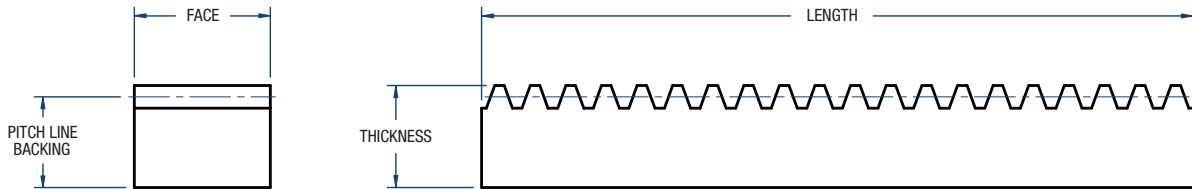

Catalog Number		Pitch	Face Width (in)	Overall Thickness (in)	Pitch Line Backing	Apx. Weight (lbs/pc)
14 1/2° P.A.	20° P.A.					
R3x2	TR3x2	3	3	1-1/2	1.167	24.0
R3x4	TR3x4	3	3	1-1/2	1.167	48.0
R3x6	TR3x6	3	3	1-1/2	1.167	72.0
R4x2	TR4x2	4	2	1-1/2	1.250	17.4
R4x4	TR4x4	4	2	1-1/2	1.250	34.8
R4x6	TR4x6	4	2	1-1/2	1.250	52.2
RA4x2		4	2	2	1.750	23.6
RA4x4		4	2	2	1.750	47.2
RA4x6		4	2	2	1.750	70.8
R5x2	TR5x2	5	1-3/4	1-1/4	1.050	12.8
R5x4	TR5x4	5	1-3/4	1-1/4	1.050	25.6
R5x6	TR5x6	5	1-3/4	1-1/4	1.050	38.4
RA5x2		5	1-3/4	1-1/2	1.300	16.0
RA5x4		5	1-3/4	1-1/2	1.300	32.0
RA5x6		5	1-3/4	1-1/2	1.300	48.0
R6x2		6	1-1/2	1	0.833	8.6
R6x4		6	1-1/2	1	0.833	17.2
R6x6		6	1-1/2	1	0.833	25.8
RA6x2	TR6x2	6	1-1/2	1-1/2	1.333	13.8
RA6x4	TR6x4	6	1-1/2	1-1/2	1.333	27.6
RA6x6	TR6x6	6	1-1/2	1-1/2	1.333	41.4
R8x2		8	1-1/4	3/4	0.625	5.2
R8x4		8	1-1/4	3/4	0.625	10.4
R8x6		8	1-1/4	3/4	0.625	15.6
RA8x2	TR8x2	8	1-1/4	1-1/4	1.125	9.8
RA8x4	TR8x4	8	1-1/4	1-1/4	1.125	19.6
RA8x6	TR8x6	8	1-1/4	1-1/4	1.125	29.4

Catalog Number		Pitch	Face Width (in)	Overall Thickness (in)	Pitch Line Backing	Apx. Weight (lbs/pc)
14 1/2° P.A.	20° P.A.					
R10x2		10	1	5/8	0.525	3.6
R10x4		10	1	5/8	0.525	7.2
R10x6		10	1	5/8	0.525	10.8
RA10x2	TR10x2	10	1	1	0.900	6.0
RA10x4	TR10x4	10	1	1	0.900	12.0
RA10x6	TR10x6	10	1	1	0.900	18.0
R12x2		12	3/4	1/2	0.417	2.0
R12x4		12	3/4	1/2	0.417	4.0
R12x6		12	3/4	1/2	0.417	6.0
RA12x2	TR12x2	12	3/4	3/4	0.667	3.4
RA12x4	TR12x4	12	3/4	3/4	0.667	6.8
RA12x6	TR12x6	12	3/4	3/4	0.667	10.2
R16x2		16	5/16	5/16	0.250	0.50
R16x4		16	5/16	5/16	0.250	1.00
R16x6		16	5/16	5/16	0.250	1.50
RA16x2	TR16x2	16	1/2	1/2	0.438	1.52
RA16x4	TR16x4	16	1/2	1/2	0.438	3.04
RA16x6	TR16x6	16	1/2	1/2	0.438	4.56
R20x2	TR20x2	20	3/8	3/8	0.325	0.84
R20x4	TR20x4	20	3/8	3/8	0.325	1.68
R20x6	TR20x6	20	3/8	3/8	0.325	2.52
R24x2		24	1/4	1/4	0.208	0.38
R24x4		24	1/4	1/4	0.208	0.76
R24x6		24	1/4	1/4	0.208	1.14