



50 Sprockets



BLACKSTAR®

5/8" Pitch

Stainless Steel

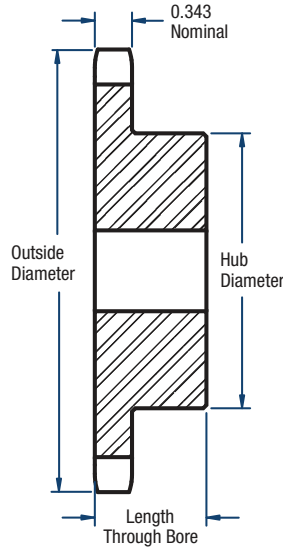

TYPE B

Single- Type B

No. of Teeth	Catalog Number	Diameters (in)		Bore (in)		Hub (in)		Approx. Weight (lbs)
		Outside	Pitch	Min.	Max.	Diameter	Length Through Bore	
8	50B8SS	1.88	1.633	5/8	5/8	1-1/8*	1	0.25
9	50B9SS	2.09	1.828	5/8	3/4	1-3/8*	1	0.36
10	50B10SS	2.30	2.023	5/8	7/8	1-9/16*	1	0.50
11	50B11SS	2.50	2.219	5/8	1	1-3/4*	1	0.60
12	50B12SS	2.71	2.415	5/8	1-1/4	1-63/64*	1	0.70
13	50B13SS	2.91	2.612	5/8	1-5/16	1-7/8	1	0.80
14	50B14SS	3.11	2.809	5/8	1-7/16	2-1/8	1	1.00
15	50B15SS	3.32	3.006	5/8	1-1/2	2-3/8	1	1.30
16	50B16SS	3.52	3.204	5/8	1-3/4	2-1/2	1	1.50
17	50B17SS	3.72	3.401	5/8	1-7/8	2-11/16	1	1.80
18	50B18SS	3.92	3.599	5/8	1-7/8	2-7/8	1	2.00
19	50B19SS	4.12	3.798	5/8	1-3/4	2-1/2	1	2.30
20	50B20SS	4.32	3.995	3/4	1-3/4	2-1/2	1	2.50
21	50B21SS	4.52	4.194	3/4	2	3	1	2.70
22	50B22SS	4.72	4.392	3/4	2	3	1	3.30
23	50B23SS	4.92	4.590	3/4	2	3	1	3.80
24	50B24SS	5.12	4.788	3/4	2	3	1-1/4	4.10
25	50B25SS	5.32	4.987	3/4	2	3	1-1/4	4.30
26	50B26SS	5.52	5.185	3/4	2	3	1-1/4	4.60
28	50B28SS	5.92	5.582	3/4	2	3	1-1/4	5.00
30	50B30SS	6.32	5.979	3/4	2-1/4	3-1/4	1-1/4	5.20
32	50B32SS	6.72	6.376	3/4	2-1/4	3-1/4	1-1/4	5.70
35	50B35SS	7.32	6.973	3/4	2-1/4	3-1/4	1-1/4	6.50
36	50B36SS	7.52	7.171	3/4	2-1/4	3-1/4	1-1/4	6.70
40	50B40SS	8.32	7.966	3/4	2-1/4	3-1/4	1-1/4	7.80
45	50B45SS	9.31	8.960	3/4	2-1/2	3-3/4	1-1/4	8.50
48	50B48SS	9.91	9.556	1	2-1/2	3-3/4	1-1/4	9.28
54	50B54SS	11.11	10.749	1	2-1/2	3-3/4	1-1/4	11.00
60	50B60SS	12.30	11.942	1	2-1/2	3-3/4	1-1/4	14.00

*Has recessed groove in the hub for chain clearance.

NOTE: Maximum bores shown will accommodate a standard keyseat and a setscrew over the keyseat. Slightly larger bores are possible with no keyseat, a shallow keyseat, or a setscrew at an angle to the keyseat.