




# British Standard

## Triple Strand Chain

(All dimensions listed in inches)

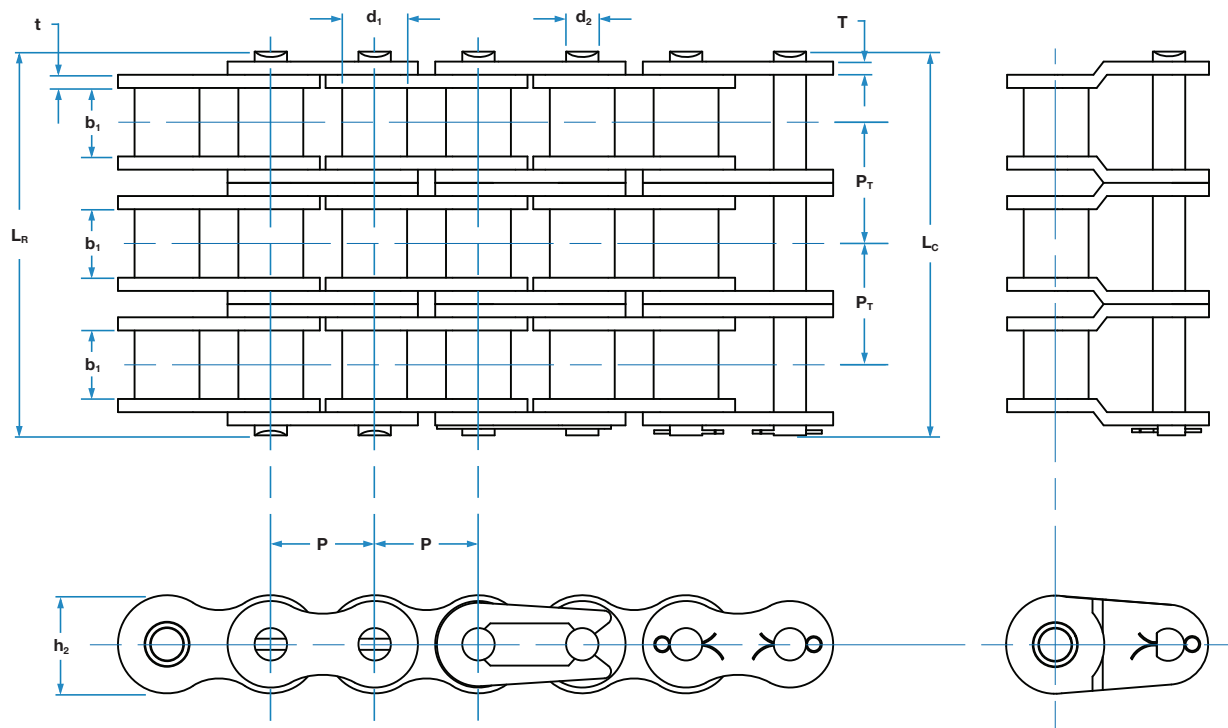

Chain Number	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Depth	Plate Thickness		Transverse Pitch	Min. Ultimate Tensile Strength (lbs)	Average Tensile Strength (lbs)	Weight per Foot (lbs/ft)
	P	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L <sub>r</sub> max	L <sub>c</sub> max	h <sub>2</sub> max	t max	T max	P <sub>r</sub>			
HD06B-3 RIV	0.375	0.250	0.225	0.129	1.32	1.36	0.32	0.051	0.051	0.40	5,659	6,767	0.8
HD08B-3 RIV	0.500	0.335	0.305	0.175	1.78	1.81	0.46	0.063	0.063	0.55	10,795	12,994	1.4
HD10B-3 RIV	0.625	0.400	0.380	0.200	2.07	2.13	0.58	0.067	0.067	0.65	15,159	18,996	1.9
HD12B-3 RIV	0.750	0.475	0.460	0.225	2.42	2.48	0.63	0.073	0.073	0.77	19,705	22,885	2.3
HD16B-3 RIV	1.000	0.625	0.670	0.326	3.93	3.98	0.83	0.163	0.122	1.26	36,364	45,794	5.5
HD20B-3 RIV	1.250	0.750	0.770	0.401	4.50	4.64	1.04	0.177	0.138	1.44	56,818	65,195	7.3
HD24B-3 RIV	1.500	1.000	1.000	0.576	5.91	6.09	1.31	0.236	0.189	1.90	96,591	110,831	13.5
HD28B-3 RIV	1.750	1.100	1.220	0.626	7.25	7.43	1.44	0.295	0.236	2.34	120,454	137,021	16.8
HD32B-3 RIV	2.000	1.150	1.220	0.701	7.21	7.41	1.65	0.276	0.236	2.31	152,273	173,215	21.2
HD40B-3 RIV	2.500	1.550	1.500	0.901	8.93	9.20	2.09	0.335	0.315	2.85	215,909	245,604	32.3
HD48B-3 RIV	3.000	1.900	1.800	1.151	11.09	11.39	2.51	0.472	0.394	3.59	340,909	384,423	50.4
HD56B-3 RIV	3.500	2.125	2.100	1.351	12.91	13.24	3.06	0.531	0.472	4.20	545,450	553,929	72.0
HD64B-3 RIV	4.000	2.500	2.400	1.551	14.56	14.89	3.55	0.591	0.512	4.72	681,820	741,870	91.4
HD72B-3 RIV	4.500	2.850	2.700	1.751	16.54	16.89	4.08	0.669	0.591	5.36	852,270	927,337	121.0