





SSER 200

Normal-Duty Ball Bearing with Snap Ring
Setscrew Lock
(Cylindrical O.D.)

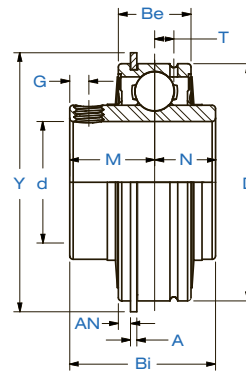

Seal
Styles



Permanent
Lubrication

Bearing Insert	Shaft Dia.	Setscrew Used	Dimensions in. mm.										Load Rating lbs. kN.		Weight
	d in. mm.	in. mm.	D	Bi	Be	N	M	A	AN	Y	G	T	Dynamic	Static	lbs. kg.
SSER 201	12	M6 x 0.75	1.8504 47.0	1.2205 31.0	0.6260 15.9	0.5000 12.7	0.7205 18.3	0.0421 1.1	0.0937 2.4	2.0748 52.7	0.1850 4.7	0.1575 4.0	2,331 10.37	1,142 5.08	0.5 0.2
SSER 201-8	1/2	1/4-28													
SSER 202	15	M6 x 0.75													
SSER 202-10	5/8	1/4-28													
SSER 203	17	M6 x 0.75													
SSER 204-12	3/4	1/4-28	2.0472 52.0	1.3740 34.9	0.7480 19.0	0.5157 13.1	0.8583 21.8	0.0421 1.1	0.0937 2.4	2.2795 57.9	0.1969 5.0	0.1693 4.3	2,542 11.31	1,349 6.00	0.5 0.2
SSER 204	20	M6 x 0.75													
SSER 205-14	7/8	1/4-28													
SSER 205-15	15/16	1/4-28													
SSER 205	25	M6 x 0.75													
SSER 206-17	1	1/4-28	2.4409 62.0	1.5000 38.1	0.8740 22.2	0.6260 15.9	0.8740 22.2	0.0650 1.7	0.1252 3.2	2.6654 67.7	0.1969 5.0	0.2165 5.5	3,554 15.81	1,942 8.64	0.8 0.4
SSER 206-18	1 1/16	1/4-28													
SSER 206-17	1 1/8	1/4-28													
SSER 206	30	M6 x 0.75													
SSER 206-19	1 3/16	1/4-28													
SSER 207-20	1 1/4	5/16-24	2.8346 72.0	1.6890 42.9	0.9370 23.8	0.6890 17.5	1.0000 25.4	0.0650 1.7	0.1252 3.2	3.0945 78.6	0.2362 6.0	0.2362 6.0	4,683 20.83	2,626 11.68	1.1 0.5
SSER 207-21	1 15/16	5/16-24													
SSER 207-22	1 3/8	5/16-24													
SSER 207	35	M8 x 1													
SSER 207-23	1 7/16	5/16-24													
SSER 208-24	1 1/2	5/16-24	3.1496 80.0	1.9370 49.2	1.0945 27.8	0.7480 19.0	1.1890 30.2	0.0650 1.7	0.1252 3.2	3.4094 86.6	0.3150 8.0	0.2953 7.5	5,294 23.55	3,057 13.60	1.5 0.7
SSER 208-25	1 9/16	5/16-24													
SSER 208	40	M8 x 1													
SSER 209-26	1 5/8	5/16-24	3.3465 85.0	1.9370 49.2	1.0945 27.8	0.7480 19.0	1.1890 30.2	0.0650 1.7	0.1252 3.2	3.6063 91.6	0.3150 8.0	0.2953 7.5	5,923 26.35	3,507 15.60	1.8 0.8
SSER 209-27	1 11/16	5/16-24													
SSER 209-28	1 3/4	5/16-24													
SSER 209	45	M8 x 1													
SSER 210-30	1 7/8	3/8-24	3.5433 90.0	2.0315 51.6	1.1260 28.6	0.7480 19.0	1.2835 32.6	0.0949 2.4	0.1252 3.2	3.7992 96.5	0.3937 10.0	0.2953 7.5	6,402 28.48	4,046 18.00	2.0 0.9
SSER 210-31	1 15/16	3/8-24													
SSER 210	50	M10 x 1.25													
SSER 210-32	2	3/8-24													
SSER 211-32	2	3/8-24	3.9370 100.0	2.1890 55.6	1.1890 30.2	0.8740 22.2	1.3150 33.4	0.0949 2.4	0.1252 3.2	4.1929 106.5	0.3937 10.0	0.2953 7.5	7,931 35.28	5,036 22.40	2.6 1.2
SSER 211-34	2 1/8	3/8-24													
SSER 211	55	M10 x 1.25													
SSER 211-35	2 3/16	3/8-24													
SSER 212-36	2 1/4	3/8-24	4.3307 110.0	2.5630 65.1	1.2520 31.8	1.0000 25.4	1.5630 39.7	0.0949 2.4	0.1240 3.2	4.5906 116.6	0.3937 10.0	0.3346 8.5	9,554 42.50	5,921 26.34	3.6 1.6
SSER 212	60	M10 x 1.25													
SSER 212-38	2 3/8	3/8-24													
SSER 212-39	2 7/16	3/8-24													