
E11432

Jumper cable with valve plug

VVSAB031MSS00,6H03STGH030MSS

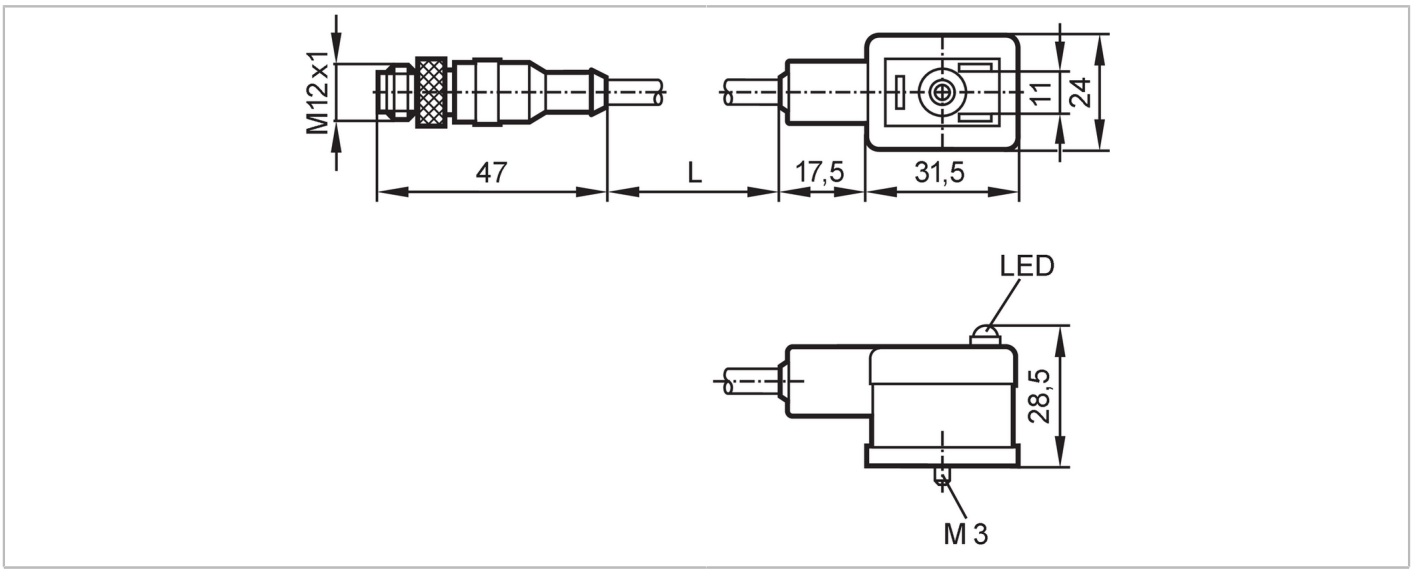

Application			
Special feature		Free from silicone; Halogen-free; Gold-plated contacts	
Application		Industrial applications / factory automation	
Free from silicone		yes	
Electrical data			
Operating voltage	[V]	< 24 AC/DC	
Overvoltage protection		yes; (VDR)	
Max. current load total	[A]	3	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 67	
Mechanical data			
Weight	[g]	76.7	
Materials		housing: PUR	
Moulded-body material		PUR	
Material nut		brass, nickel-plated	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Accessories			
Items supplied		screw: 1	
		panel for labelling: 1	
Remarks			
Pack quantity		1 pcs.	


E11432

Jumper cable with valve plug

VVSAB031MSS00,6H03STGH030MSS

Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Contacts: 3, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm



Electrical connection

Cable: 0.6 m, PUR, Halogen-free, black, Ø 5 mm; 3 x 0.5 mm² (42 x Ø 0.1 mm)

Connection

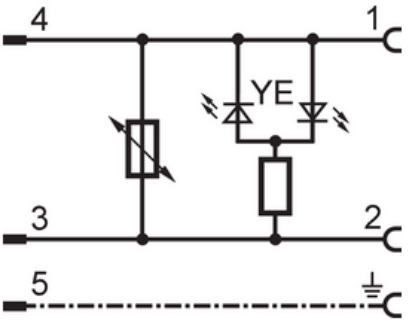

Electrical connection - socket

Connector: 1 x valve type B industrial standard, angled; Contacts: 3, nickel-plated brass; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm

