
E18520

Wirable socket

SDOGH040MSSFKPG-T

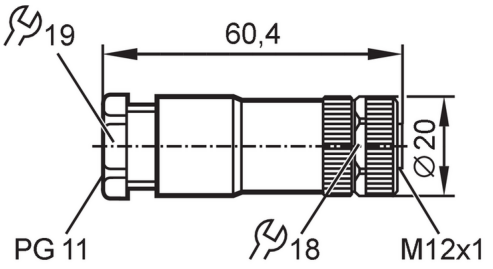


Application		
Special feature		Free from silicone; Gold-plated contacts
Design		Powerkabel, T-coded
Application		Industrial applications / factory automation; Use in machine tools, coolants and lubricants
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 60 DC
Max. current load total	[A]	12; (when using conductors with 1.5 mm²)
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67
Mechanical data		
Weight	[g]	29.03
Moulded-body material		PA
Material nut		diecast zinc
Sealing material		NBR
Remarks		
Pack quantity		1 pcs.

Electrical connection

screw terminals: 0.75...1.5 mm²; Cable sheath: Ø 8...10 mm

Electrical connection - socket

Connector: 1 x M12, straight; coding: T; Contacts: 4, gold-plated; Moulded body: PA; Locking: diecast zinc; Sealing: NBR; Tightening torque: 0.4 Nm



Connection

