
E18343

Wirable plug

SSTGH080MSSFKPG

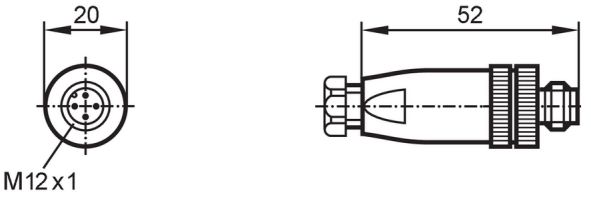


Application		
Special feature		Free from silicone; Gold-plated contacts
Application		Industrial applications / factory automation
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 125 AC/DC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...100
Protection		IP 68
Mechanical data		
Weight	[g]	23
Dimensions	[mm]	20 x 20 x 52
Moulded-body material		PA
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection

terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 8, gold-plated; Moulded body: PA; Locking: brass, nickel-plated



E18343

Wirable plug

SSTGH080MSSFKPG

Connection

