




Safety and warning instructions

Comply with the necessary safety precautions when handling components that are vulnerable to electrostatic discharges
(EN 61340-5-1, EN 61340-5-2).

Hardware installation:

The VDP16.3/40.3/60.3/92.3 is a panel screen for industrial use. Before using the VDP16.3/40.3/60.3/92.3, inform yourself about the special features of your configuration. Please refer to the manuals for more information about the settings.

VDP16.3/40.3/60.3/92.3
EN Contacts and interfaces

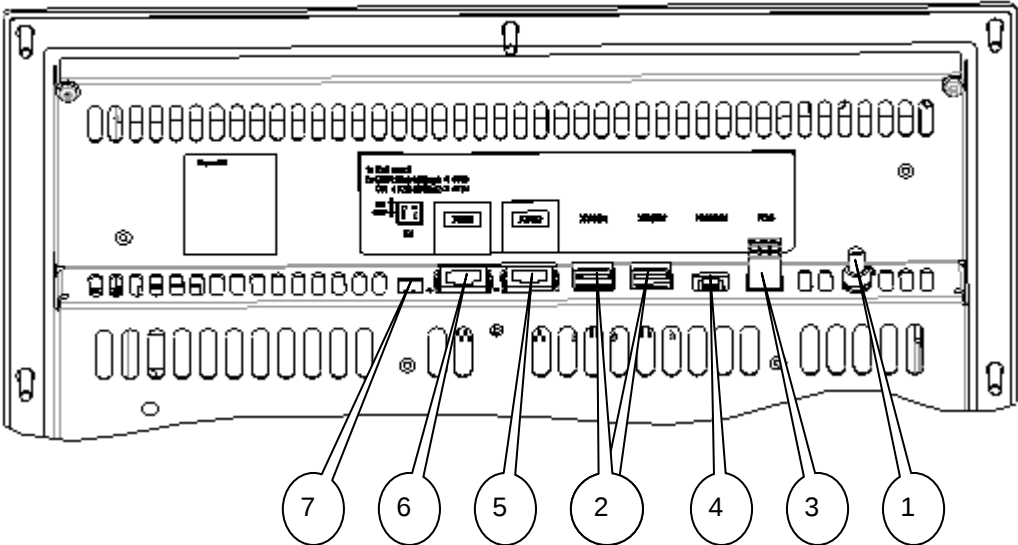

Check for the correct assignment of the connection cables in case of prewired terminals and connectors.
For terminal connectors, use copper conductors only.

Surrounding air temperature: +5 °C to +45 °C

Attention:

Never plug or remove any wiring while the system is running!
If required, unplug the power connector.



Warning:

Material damages to electronics due to missing functional earth ground connection!

No	Designation	Description / Type
1		Functional earth
2	XUSB1/2 + XUSB3/4	USB interface
3	X1S1	24VDC power supply
4	XUSBIN	USB interface VXB
5	XSER	RJ45 for full duplex- serial communication
6	XVID	RJ45 for DVI transfer
7	S1	DIP switch length of cable