


Lead Free Brass Ball Valve

Mini Valve, 2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, 600 WOG

T-83CG

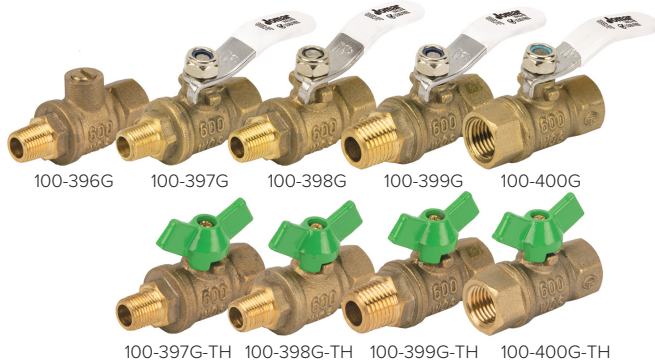

FEATURES

- Dezincification Resistant Brass Alloy
- Large Raised Wrench Flats
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content



CERTIFICATIONS/APPROVALS

- IAPMO Certified
 - NSF 61-8
 - NSF 372
 - Uniform Plumbing Code (cUPC)
 - IAPMO/ANSI Z1157-2014
 - NSF/ANSI 14-2014

MSS SP-110
ANSI B1.20.1

VALVE SEAT RATING

600 WOG - 150 WSP

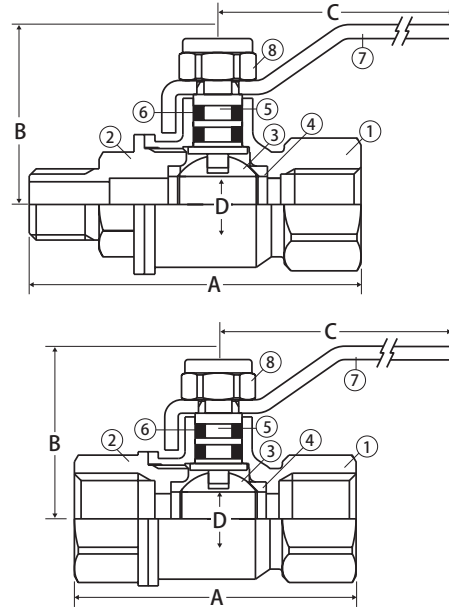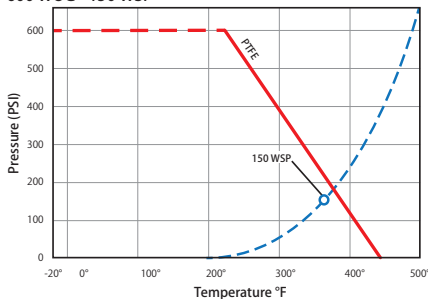

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	End Connection	Lead Free Brass - C46500
3	Ball	304 Stainless Steel
4	Seat (2)	PTFE
5	Stem	304 Stainless Steel
6	Stem O-Ring (2)	Buna-N
7	Handle*	Steel - Chrome Plated or Aluminum
8	Handle Nut / Screw*	Steel - Chrome Plated

*Material Depends on Handle Selection

DIMENSIONS

Part No	Size	A	B	C	D	C _v
Screwdriver Slot						
100-396G	1/4" FIP x 1/8" MIP	1.93	0.77	-	0.28	4.63
Lever Handle						
100-397G	1/8" FIP x 1/8" MIP	1.90	1.07	1.77	0.28	4.63
100-398G	1/4" FIP x 1/8" MIP	1.93	1.07	1.77	0.28	4.63
100-399G	1/4" FIP x 1/4" MIP	2.01	1.07	1.77	0.28	4.63
100-400G	1/4" FIP x 1/4" FIP	1.65	1.07	1.77	0.28	4.63
T-Handle						
100-397G-TH	1/8" FIP x 1/8" MIP	1.90	1.10	1.33	0.28	4.63
100-398G-TH	1/4" FIP x 1/8" MIP	1.93	1.10	1.33	0.28	4.63
100-399G-TH	1/4" FIP x 1/4" MIP	2.01	1.10	1.33	0.28	4.63
100-400G-TH	1/4" FIP x 1/4" FIP	1.65	1.10	1.33	0.28	4.63