


Lead Free Bronze Y-Strainer

Threaded Connection, 20 Stainless Steel Mesh, 150 WOG

T-651G



FEATURES


- Dezincification Resistant Bronze
- Residential and Commercial Applications
- 1/2" - 3/4": 3/8" FNPT Plugged Cap
- 1" - 3": 1/2" FNPT Plugged Cap
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

MSS SP-25
Truesdail Certified
- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372

PRESSURE/TEMPERATURE RATING

150 WOG
Max Temperature 250°F

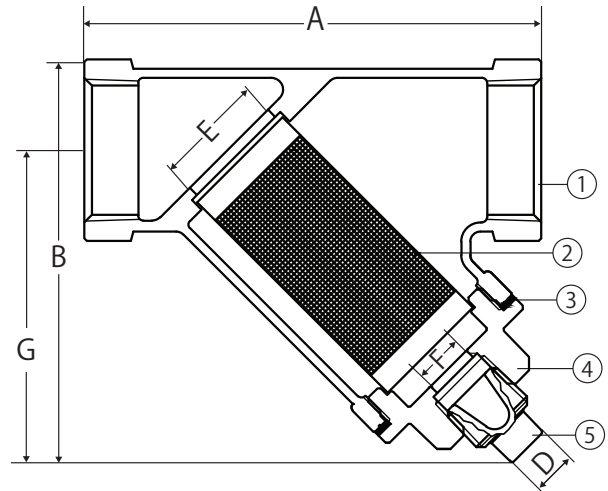

MATERIALS

No.	Part	Material
1	Body	Cast Bronze - C89844
2	Filter	304 Stainless Steel - 20 Mesh Screen
3	Packing	Fibre
4	Bonnet	Cast Bronze - C89844
5	Plug	Cast Bronze - C89844

DIMENSIONS

Part No	Size	A	B	D	E	F	G	C _v
106-303G	1/2"	3.23	3.01	0.45	0.61	0.43	2.44	9.42
106-304G	3/4"	3.94	3.49	0.45	0.83	0.43	2.78	13.84
106-305G	1"	4.53	4.03	0.52	1.00	0.57	3.19	23.72
106-306G	1-1/4"	5.33	4.70	0.52	1.30	0.59	3.66	31.03
106-307G	1-1/2"	6.20	5.02	0.52	1.64	0.59	3.82	38.58
106-308G	2"	7.44	6.14	0.52	2.03	0.59	4.65	45.11
106-309G	2-1/2"	8.94	7.22	0.52	2.50	0.59	5.39	84.94
106-310G	3"	10.00	7.85	0.52	3.01	0.59	5.67	100.52