LS-FLoat Series Float Switch


Description

This line of float switches are capable of 'pump up' or 'pump down' operation. The LS Float switch is only rated for DC applications. The LS Float switch is rated only for Clear water applications and should only be extended with twisted shielded pair wire.

Product Features

Part Numer	Contact Type	Max Contact Rating(W)	Max Switching Voltage(VDC)	Max Switching Current(A)	Temp Range (C)	Cord Length (Ft)	Max Internal Resistance (mOhm)
LS-Float	Either NC or NO	10	24	0.5	-10 to 85	15	100

Measurements

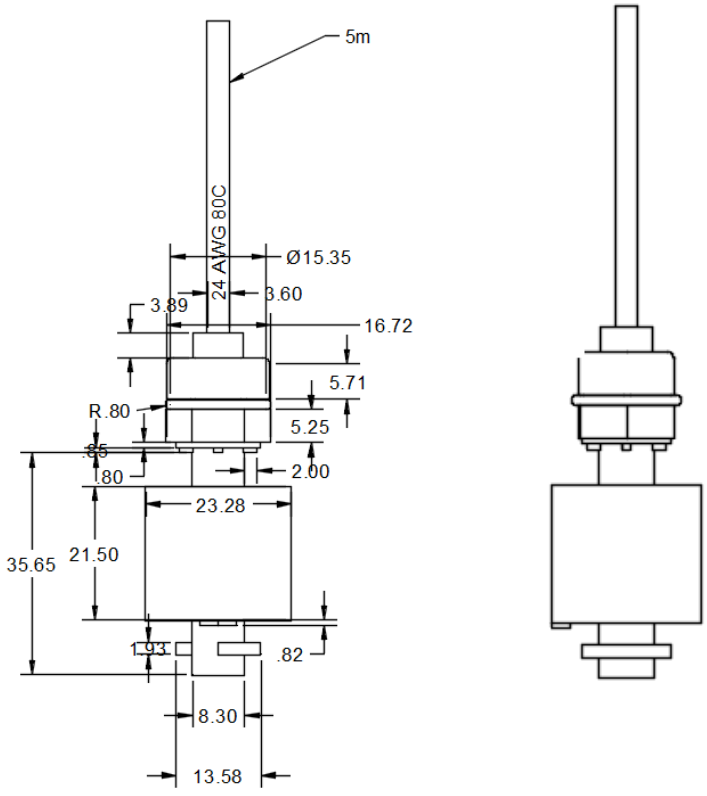

**Measurements in Milimeters*

Material


Float Ball	Float Body	Screw Nut	E-Ring
Polypropylene	Polypropylene + Glass Fiber	Polypropylene + Glass Fiber	Polypropylene

Switch


Type	Switch Type	Max Operating Time (ms)	Mercury Free	UL Approval?	Polarity?
Kofu Reed Switch	Reed Switch	0.4	Yes	No	No

Float State

Normally Open	Arrow on Bottom
Normally Closed	Arrow on Top

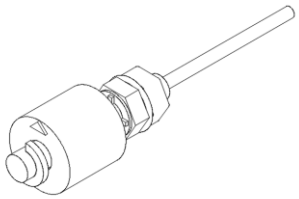

Normally Closed

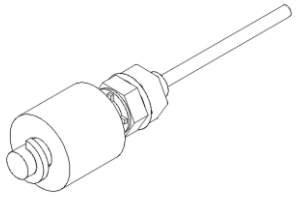

Normally Open

The datasheets provided by Sump Alarm Inc., its subsidiaries, and/or affiliates (“Sump Alarm”) are intended solely to assistthird parties (“Buyers”) in the evaluation and integration of Sump Alarm products (herein referred to as “components”) into their systems. Buyers are solely responsible for conducting their own independent analysis, validation, and engineering judgment when designing and implementing any system or product that incorporates Sump Alarm components.
Sump Alarm datasheets are developed under standard laboratory conditions and in accordance with established engineering practices. Unless explicitly stated within the datasheet, no additional testing or evaluation has been performed. Sump Alarm may update, revise, or improve its datasheets or components at any time without prior notice.
Datasheets may be used solely in connection with the specific Sump Alarm components identified therein. No other license, express or implied, by estoppel or otherwise, is granted to any intellectual property right of Sump Alarm or any third party.
All float switches covered in this datasheet are covered under a 2-year part warranty from the date of purchase, guaranteeing replacement for any component that fails under normal use due to defects in materials or workmanship. This warranty does not extend to damage caused by misuse, improper installation, or external events beyond Sump Alarm’s control.
All product sales are subject to Sump Alarm’s standard terms and conditions of sale, which are available atwww.sumpalarm.com. Sump Alarm assumes no liability for application-specific guidance or the final design and performance of Buyer’s products.
Buyer acknowledges that it is solely responsible for ensuring its products meet all applicable legal, regulatory, and safetystandards. Any use of Sump Alarm components in Buyer applications is at Buyer’s own risk, regardless of any technical assistance or application information that may be provided by Sump Alarm.
Mailing Address: Sump Alarm Inc., 12150 Lackland Rd, St. Louis MO, 63146 USA