


DIAMOND

CHAIN COMPANY INC.

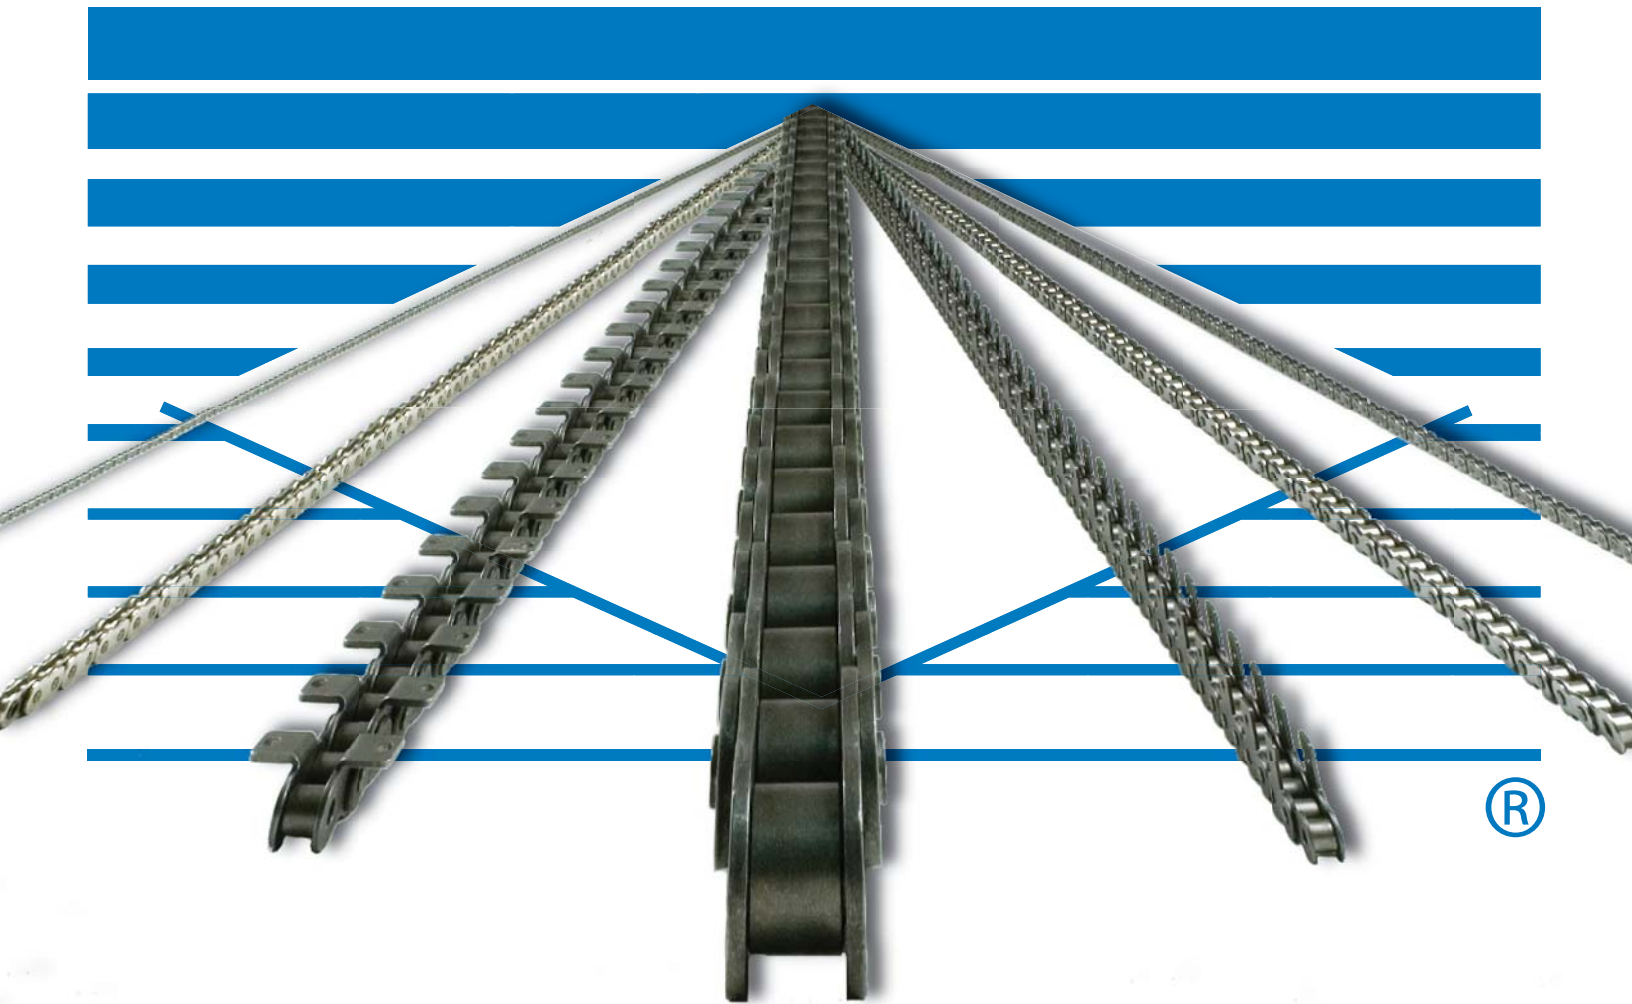


Maintenance Guide

TABLE OF CONTENTS

ORDERING INFORMATION	3
INSTALLATION	4
LUBRICATION	5
INSPECTIONS	6
ELONGATION LIMITS	7
TROUBLESHOOTING	8

WHAT IS CHAIN WEAR?

Did you know—Chain does not “STRETCH”? Chain Wear is actually when material is removed from Pin and Bushing.

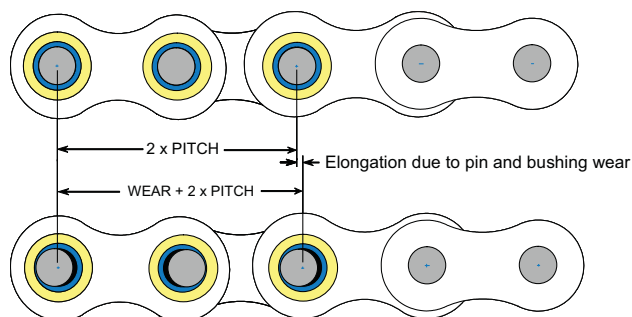

INSTRUCTIONS

WHEN DISASSEMBLING OR ASSEMBLING CHAINS:

WARNING — The components of a chain are hardened parts. Striking these parts may cause metal chips to break off from the chain or the tools used resulting in personal injury. During all stages of chain assembly, wear safety glasses to prevent metal parts or chips from entering your eyes and have personnel in the immediate area do likewise.

A. Pin Removal

- 1) If chain is of cotterpin-type construction, remove cotters.
- 2) If chain is riveted-type construction, grind pin heads off so pin ends are flush with the linkplate.
- 3) Drive pins out of linkplate using a Diamond pin extractor Model #113 or 135. Some multiple strand chains or large pitch models will require a hammer and punch or a press to remove the pins.

B. Installation of Coversides

Diamond coversides are manufactured three different ways: (1) Slip Fit, (2) Modified Press Fit, and (3) Full Press Fit. Modified and Full Press Fits require some patience and tools to assemble and/or disassemble.

C. Installation of Spring Locks and Cotterpins

After coverside have been installed, install spring locks or cotters (depending on chain design). Avoid using bent or worn cotters or spring locks. After spring locks (or cotters) are installed, lightly tap pin ends to position these parts snug against the coverside for additional support.

WHEN INSTALLING CHAIN DRIVES ON EQUIPMENT:

WARNING — You may be seriously injured if you attempt to install chain on equipment under power. Shut off power and lock out gears and sprockets before attempting installation.

Once installed, the chain drive must be guarded to prevent personal injury or property damage in the event the chain separates during operation. If chain drive is not guarded, contact equipment manufacturer for recommendations on guarding before using equipment.

Knowing more about how the chain is constructed may help in assembly and disassembly. Further information may be obtained by calling or writing Diamond Chain Company:

Call toll free: 1-800-872-4246

Or write: Diamond Chain Company
402 Kentucky Avenue
Indianapolis, IN 46207
317-638-6431
FAX: 317-633-2243

ORDERING INFORMATION



Basic Information needed to order all chain.

- Quantity
- Type
- Chain length
- Catalog number
- Riveted or cottered when optional

If you have any questions, please do not hesitate to contact Diamond's sales engineering staff.

Headquarters

402 Kentucky Avenue
P.O. Box 7045
Indianapolis, IN 46207
1-317-638-6431
1800-872-4246
1-800 US CHAIN

Service Centers:


Dallas, Texas
877-453-9128 (toll free)
214-631-2374 (fax)

Sacramento, California
877-453-9127 (toll free)
916-372-5801 (fax)


New Castle, United Kingdom
44-(0)191-414-8822
44-(0)191-414-8877 (fax)

Brampton, Ontario, Canada
905-455-6969
905-455-6061 (fax)


Chain-5 pitches long, roller link each end.




Chain-9 pitches long, with bent attachments, both sides of chain, every pitch.

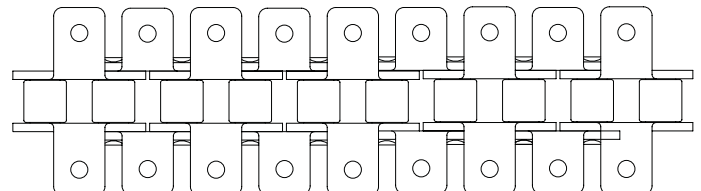


Chain-6 pitches long, including connecting link.

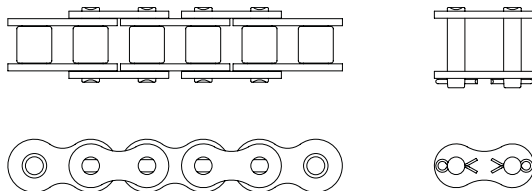


Chain-9 pitches long, with straight attachments, every pitch.

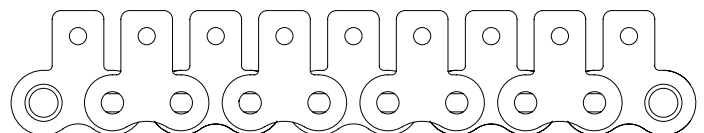

Chain-24 pitches long, riveted endless.

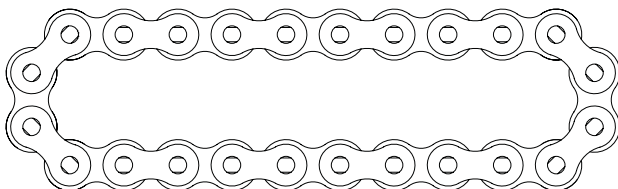

Chain-9 pitches long, with all pins extended.

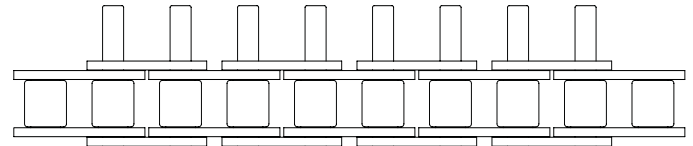

1-800 US CHAIN

1-800-872-4246

INSTALLATION

To obtain maximum service-life and efficiency from a chain drive, it is necessary that certain precautions in installation be taken. Chain drive installation is relatively simple and good results may be obtained when the following conditions are met:

1. The roller chain, sprockets, and other components are in good condition.
2. The sprockets are properly aligned.
3. Provision is made for adequate lubrication.
4. The chain is correctly tensioned.


Condition of Components

Shafting, bearings, and foundations should be supported rigidly to maintain the initial alignment. Roller chain should be free of grit and dirt. Wash chain in kerosene when required and then re-lubricate!

Drive Alignment

Misalignment results in uneven loading across the width of the chain and may cause roller linkplate and sprocket tooth wear. Drive alignment involves two things: parallel shaft alignment and axial sprocket alignment.

1. Shafts should be parallel and level. This condition may be readily checked by the use of a feeler bar, and a machinist's level. If there is axial movement of the shaft (as in the case of an electric motor), lock the shaft in the normal running position before aligning the sprockets.

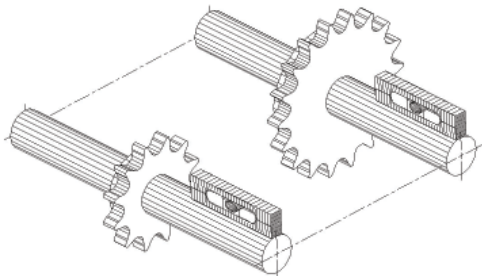


Most single strand drives will perform acceptably if the shafts are parallel and in the same plane within .050 in/ft (4.2 mm/m) or 1/4°. However, high speed, high horse power, or multiple strand drives should be aligned within the tolerance obtained from the following formula:

$$\text{Tolerance} = \frac{.00133 C}{P n} \text{ (in/ft), or } \frac{.111 C}{P n} \text{ (mm/m)}$$

Where: C = center distance, in inches or mm.
P = chain pitch, in inches or mm.
n = number of chain strands.

2. Sprocket axial alignment can be checked with a straight edge which will extend across the finished sides of the two sprockets. Normally, it is good practice to align the

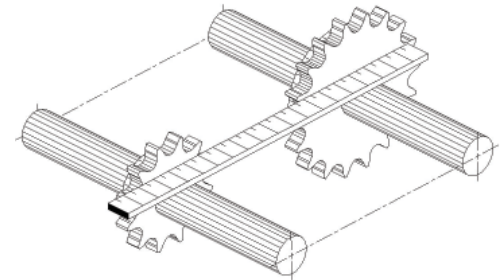

sprockets as close to the shaft bearing as possible. For long center distances, use a taut cord, or wire long enough to extend beyond each of the sprockets. The maximum allowable amount of axial misalignment is obtained from the following formula:

$$\text{Max. Offset} = 0.045 P \text{ in or mm}$$

Where: P - chain pitch, in inches or mm.

This formula applies to both single and multiple strand chains.

Installing the Chain


Recheck all preceding adjustments for alignment and make certain all setscrews, bolts and nut are tight. Fit chain around both sprockets and bring the free ends together on one sprocket for connection. The sprocket teeth will locate the chain end links. Install the connecting link, and connecting link coverplate, and the spring clip or cotter pins. On larger pitch or heavy multiple strand chains, it may be necessary to lock the sprockets for this operation. When press fit coverplates are used, be careful not to drive the plate on so far as to grip the roller links. Stiff joints can result if this is done. On drives with long spans, it may be necessary to support the chain with a plank or bar as the connection is made.

Chain Tension

Check chain tension to be certain the slack span has 4-6% mid-span movement in horizontal drives and 2-3% in vertical drives. Please reference the table below.

Recommended Possible Mid-Span Movement AC

Drive Center-Line	Tangent Length Between Sprockets								
	5"	10"	15"	20"	30"	40"	60"	80"	100"
Horizontal to 45°	.25"	.5"	.75"	1"	1.5"	2"	3"	4"	5"
Vertical to 45°	.12	.25	.38	.5	.75	1	1.5	2	2.5

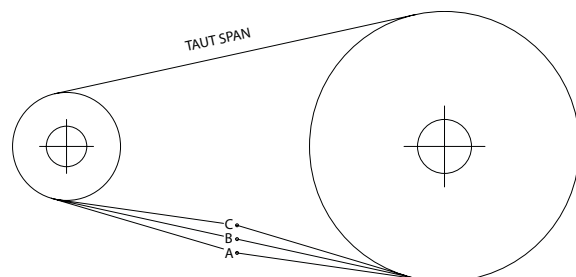

AC = Total Possible Mid-Span Movement

LUBRICATION

Roller chain consists of a series of connecting traveling metallic bearings, which must be properly lubricated to obtain the maximum service life of the chain. Although many slow speed drives operate successfully with little or no lubrication beyond the initial factory lubrication, proper lubrication will greatly extend the useful life of every chain drive. The chain drive requires lubrication for six purposes.


1. To resist wear of the pin-bushing joint.
2. To cushion impact loads.
3. To dissipate any heat generated.
4. To flush away foreign materials.
5. To lubricate chain-sprocket contact surfaces.
6. To retard rust or corrosion.

A good grade of clean petroleum oil without additives, free flowing at the prevailing temperatures, should be used. Some additives leave a varnish or gum deposit which prevents the oil from entering chain joints. Heavy oils and greases are generally too stiff to enter the chain joints and should not be used.

With proper lubrication, a separating wedge of lubrication is formed between the pins and bushings in the chain joints much like that formed in journal bearings. The viscosity of the lubricant greatly affects its film strength, and its ability to separate moving parts. The highest viscosity oil which will flow between the chain linkplates and fill the pin-bushing areas will provide the best wear life. This is essential to minimize metal to metal contact and, if supplied in sufficient volume, the lubricant also provides effective cooling and impact dampening at higher speeds.

Note: Speeds beyond the maximum recommended for chain operation are indicated in the horsepower rating tables with zero horsepower. Operation at these or higher speeds will result in excessive galling of the chain pins and bushings regardless of the volume of oil applied.

Chain drives should be protected from abrasive and corrosive conditions, and the oil supply kept free of contamination. Periodic oil changes are desirable.

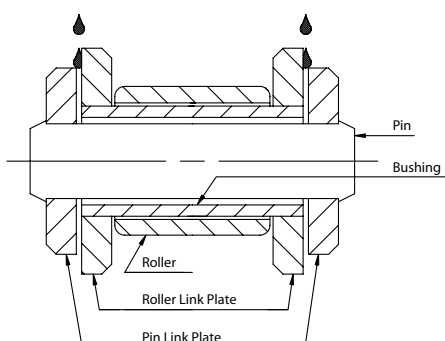

**Chain Cross-Section
Showing Exaggerated Clearances**

Note: Oil should be applied to the lower span of chain on the upper edges of linkplates since access of oil to pin-bushing joints is possible only through the clearances between the roller chain linkplates.

Oil applied to rollers

only cannot reach pin-bushing joints, and therefore, cannot retard chain elongation due to wear. The lengthening of chains in service results from wear on pin and bushing surfaces, not rollers.

When lubricating multiple strand chain, it is important that lubricant be directed to each row of chain linkplates.

In conveyor applications, oil should be directed between the rollers and bushings as well as between the chain linkplates.

The following table indicates the lubricant viscosity recommended for various surrounding temperatures:


Recommended Grade	Temperature, °F
SAE 5	- 50 to + 50
SAE 10	- 20 to + 80
SAE 20	+ 10 to + 110
SAE 30	+ 20 to + 130
SAE 40	+ 30 to + 140
SAE 50	+ 40 to + 150

There are three basic types of lubrication for roller chain drives. Close adherence to the recommended type of lubrication is essential to obtaining maximum service life of a chain drive.

The recommended type of lubrication as shown in the horsepower rating tables is determined by the chain speed and the amount of power transmitted.

Manual or drip lubrication. (Type A)

Oil should be applied periodically between the chain linkplate edges with a brush, spout can, or drip lubrication.




Oil bath or oil slinger. (Type B)

With bath lubrication, the lower strand of chain runs through a sump of oil in the drive housing. The oil level should reach the pitch line of the chain at its lowest point while operating. Only a short length of chain should run through the oil. A typical drive arrangement for bath lubrication is shown in the illustration below.

LUBRICATION

Oil bath or oil slinger. (Type B) continued

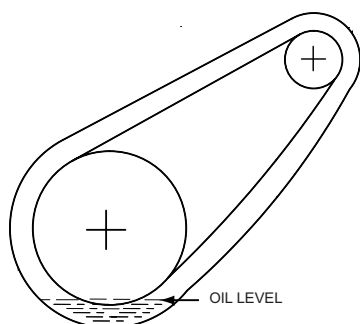


Drive arrangements which permit long length of chain to travel through the oil should be avoided as overheating or foaming may result.

With slinger disc lubrication, the chain operates above the oil level. The disc picks up oil from

the sump and deposits it into the chain, usually by means of a trough. The diameter of the disc should produce rim speeds between 600 Ft/Min. minimum and 8000 Ft/Min. maximum. A collector plate is usually required to direct the oil to the chain linkplates. See typical drive installation using slinger disc lubrication immediately below.

Oil Stream Lubrication. (Type C)

This type of lubrication is required for large horsepower, high speed drives. An oil pump should be provided to spray the oil across the lower span of chain in a continuous stream. Orifices should be placed so that oil is sprayed across each strand of the chain. This type of lubrication may be used up to the maximum speeds shown in the horsepower rating tables for each size of chain, except where the rating is zero.

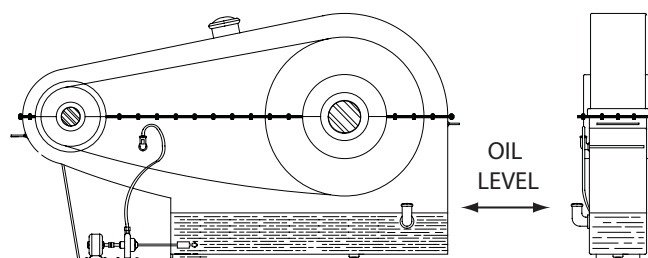

Limiting Chain Speed for Various Types of Lubrication (Chain Speed in Ft/Min.)

Chain No.	35	40	50	60	80	100	120	140	160	200
Type A	350	300	250	215	165	145	125	110	100	80
Type B	2650	2200	1900	1750	1475	1250	1170	1050	1000	865
Type C	Use for speeds higher than Type B limits.									

INSPECTIONS

All chain drives should receive regular maintenance. Each drive should be inspected after the initial 100 hours of operation. Thereafter, most drives may be inspected at 500 hour intervals. However, drives subjected to shock loads or severe operating conditions should be inspected at 200 hour intervals.

At each inspection, the following items should be checked and corrected, if necessary.

1. **Check lubrication** — On slow speed drives, where manual lubrication is used, be sure the lubrication schedule is being followed. If the chain is covered with dirt and debris, clean the chain with kerosene and re-lubricate it.

WARNING! NEVER USE GASOLINE OR OTHER FLAMMABLE SOLVENTS TO CLEAN A CHAIN. A FIRE MAY RESULT.

If drip lubrication is used, check for adequate oil flow and proper application to the chain. With bath or pump

lubrication, check oil level and add oil if needed. Check oil for contamination and change oil if needed. Change oil after the first 100 hours of operation and each 500 hours thereafter. If pump lubrication is used, check each orifice to be sure it is clear and is directing oil onto the chain properly.

2. **Check Chain Tension** — Check chain tension and adjust as needed to maintain the proper sag in the slack span. If elongation exceeds the available adjustment, remove two pitches and reconnect the chain.
3. **Check Chain Wear** — Measure the chain wear elongation and if elongation exceeds functional limits or is greater than 3% (.36 inches in one foot) replace the entire chain. Do not connect a new section of chain to a worn chain because it may run rough and damage the drive. Do not continue to run a chain worn beyond 3% elongation because the chain will not engage the sprockets properly and it may damage the sprockets.

INSPECTIONS

4. **Check Sprocket Tooth Wear** — Check for roughness or binding when the chain engages or disengages from the sprocket. Inspect the sprocket teeth for reduced tooth section and hooked tooth tips. If these conditions are present, the sprocket teeth are excessively worn and the sprocket should be replaced. Do not run new chain on worn sprockets as it will cause the new chain to wear rapidly. Conversely, do not run a worn chain on new sprockets as it will cause the new sprockets to wear rapidly.
5. **Check Sprocket Alignment** — If there is noticeable wear on the inside surface of the chain roller linkplates, the sprockets may be misaligned. Realign the sprockets as outlined in the installation instructions to prevent further abnormal chain and sprocket wear.
6. **Check for Drive Interference** — Check for interference between the drive and other parts of the equipment. If there is any, correct it immediately. Interference can cause abnormal and potentially destructive wear on the chain or the interfering part. If the edges of the chain linkplates impact against a rigid part, linkplate fatigue and chain failure can result.

Check for and eliminate any buildup of debris or foreign material between the chain and sprockets. A RELATIVELY SMALL AMOUNT OF DEBRIS IN THE SPROCKET ROLL SEAT CAN CAUSE TENSILE LOADS GREAT ENOUGH TO BREAK THE CHAIN IF FORCED THROUGH THE DRIVE.

7. **Check for Failure** — Inspect the chain for cracked, broken or deformed parts. If any of these conditions are found, REPLACE THE ENTIRE CHAIN, even though portions of the chain appear to be in good condition. In all likelihood, the entire chain has been damaged.

For additional technical assistance, contact any of Diamond Chain's Distribution Centers, United States sales offices or stocking distributors located throughout the world.


Our engineers will assist with any custom-chain application or installation. At Diamond Chain Company, we believe service is as important as quality.

FOR REFERENCE ONLY

3.0% Max. Elongation Adjustable Center Distance Drives

1.5% Max. Elongation Fixed Center Distance Drives


Chain Wear Scale available free from any Diamond Sales Representative.

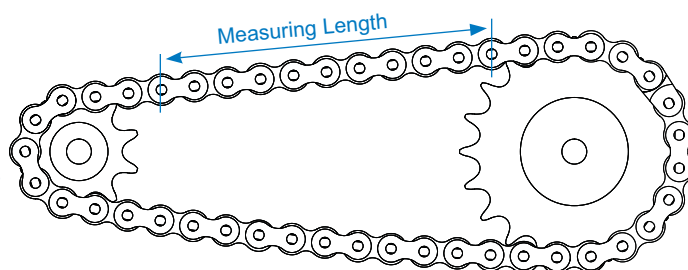


Chain Wear Elongation Limits

ANSI Chain No.	Chain Pitch		Measured Length				
	in.	mm	Pitches	Nominal		At 3% Wear	
				in.	mm	in.	mm
25	.250	6.35	48	12.00	305	12.375	314
35	.375	9.52	32	12.00	305	12.375	314
41	.500	12.70	24	12.00	305	12.375	314
40	.500	12.70	24	12.00	305	12.375	314
50	.625	15.88	20	12.50	318	12.875	327
60	.750	19.05	16	12.00	305	12.375	314
80	1.000	25.40	12	12.00	305	12.375	314
100	1.250	31.75	20	25.00	635	25.750	654
120	1.500	38.10	16	24.00	610	24.719	628
140	1.750	44.45	14	24.50	622	25.250	641
160	2.000	50.80	12	24.00	610	24.719	628
180	2.250	57.15	12	27.00	686	27.812	706
200	2.500	63.50	10	25.00	635	25.750	654
240	3.000	76.20	8	24.00	610	24.719	628

TROUBLESHOOTING GUIDE EXAMPLES

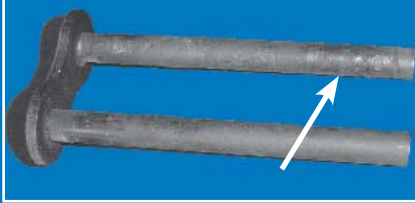


Pin Galling





Interference



Pin Tensile Failure

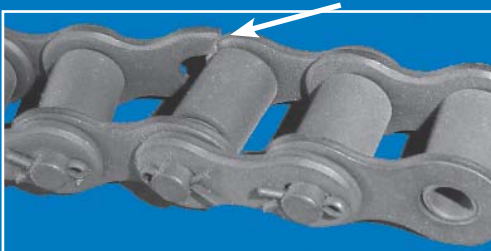


Roller Link Plate Tensile Failure

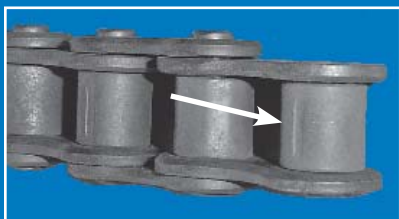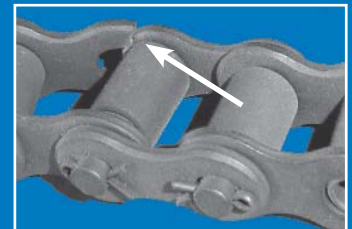

Tooth Topping and Roller Damage




TROUBLESHOOTING GUIDE EXAMPLES




Pin Fatigue Failure




Pin Link Plate Fatigue Failure



Roller Link Plate Fatigue Failure







Offset Link Plate Fatigue Failure







Sprocket Wear



TROUBLESHOOTING GUIDE


CONDITION/SYMPTOM	POSSIBLE CAUSE	WHAT TO DO
Tight Joints 	Dirt or foreign material in chain joints.	Clean and re-lubricate chain.
	Inadequate lubrication.	Replace chain. Re-establish proper lubrication.
	Misalignment.	Replace sprockets and chain if needed. Realign sprockets.
	Internal corrosion or rust.	Replace chain. Eliminate cause of corrosion or protect chain.
Rusted Chain 	Overload bends pins or spreads roller linkplates.	Replace chain. Eliminate cause of overload.
	Exposed to moisture.	Replace chain. Protect from moisture.
	Water in lubricant.	Change lubricant. Protect lubrication system from water. Replace chain.
Turned Pins 	Inadequate lubrication.	Provide or re-establish proper lubrication. Replace chain, if needed.
	Overload.	Replace chain. Eliminate cause of overload.
Enlarged Holes 	Inadequate lubrication	Replace chain. Re-establish proper lubrication.
	Overload.	Replace chain. Eliminate cause of overload.
Broken Pins Broken Linkplates 	Extreme Overload.	Replace chain. Replace sprockets if indicated. Eliminate cause of overload or redesign drive for larger pitch chain.
Missing Parts 	Missing at assembly.	Replace chain.
	Broken and lost.	Find and correct cause of damage. Replace chain.
Broken, Cracked or Deformed Rollers 	Speed too high.	Replace chain. Reduce speed.
	Sprockets too small.	Replace chain. Use larger sprockets, or possibly redesign drive for smaller pitch chain.
	Chain riding too high on sprocket teeth.	Replace chain. Re-tension chain more often.
Pin Galling 	Speed or load too high.	Reduce speed or load. Possibly redesign drive for smaller pitch chain.
	Inadequate lubrication.	Provide or re-establish proper lubrication.
Chain Climbs Sprocket Teeth 	Excess chain slack.	Re-tension chain.
	Excessive chain wear.	Replace and re-tension chain.
	Excessive sprocket wear.	Replace sprockets and chain.
	Excessive overload.	Replace chain. Eliminate cause of overload.

TROUBLESHOOTING GUIDE

CONDITION/SYMPTOM	POSSIBLE CAUSE	WHAT TO DO
Missing or Broken Cotters	Cotters installed improperly. Vibration. Excessively high speed.	Install new cotters per manufacturer's instructions. Replace chain. Reduce vibration. Use larger sprockets. Replace chain. Reduce speed. Redesign drive for smaller pitch chain.
Exposed Chain Surfaces Corroded or Pitted	Exposure to corrosive environment.	Replace chain. Protect from hostile environment.
Cracked Linkplates (Stress Corrosion) 	Exposure to corrosive environment combined with stress from press fits.	Replace chain. Protect from hostile environment.
Cracked Linkplates (Fatigue) 	Loading greater than chain's dynamic capacity.	Replace chain. Reduce dynamic loading or redesign drive for larger chain.
Battered Linkplate Edges 	Chain striking an obstruction.	Replace chain. Eliminate interference.
Worn Linkplate Contours 	Chain rubbing on casing, guide, or obstruction.	Replace chain if 5% or more of height worn away. Re-tension chain. Eliminate interference.
Excessive Noise	Chain striking an obstruction. Loose casing or shaft mounts. Excess chain slack. Excessive sprocket wear. Sprocket misalignment. Inadequate lubrication. Chain pitch too large Too few sprocket teeth.	Replace chain. Eliminate interference. Tighten fasteners. Re-tension chain. Replace and re-tension chain. Replace chain and sprockets, if needed. Realign sprockets. Replace chain if needed. Re-establish proper lubrication. Redesign drive for smaller pitch chain. Check to see if larger sprockets can be used. If not, redesign drive.
Wear on Inside of Roller Linkplates and One Side of Sprockets	Sprocket misalignment.	Replace sprockets and chain if needed. Realign drive. Re-tension chain.
Chain Clings to Sprocket	Excessive sprocket wear. Sprocket misalignment.	Replace sprockets and chain. Replace sprockets and chain if needed. Realign sprockets.

DIAMOND

CHAIN COMPANY INC.

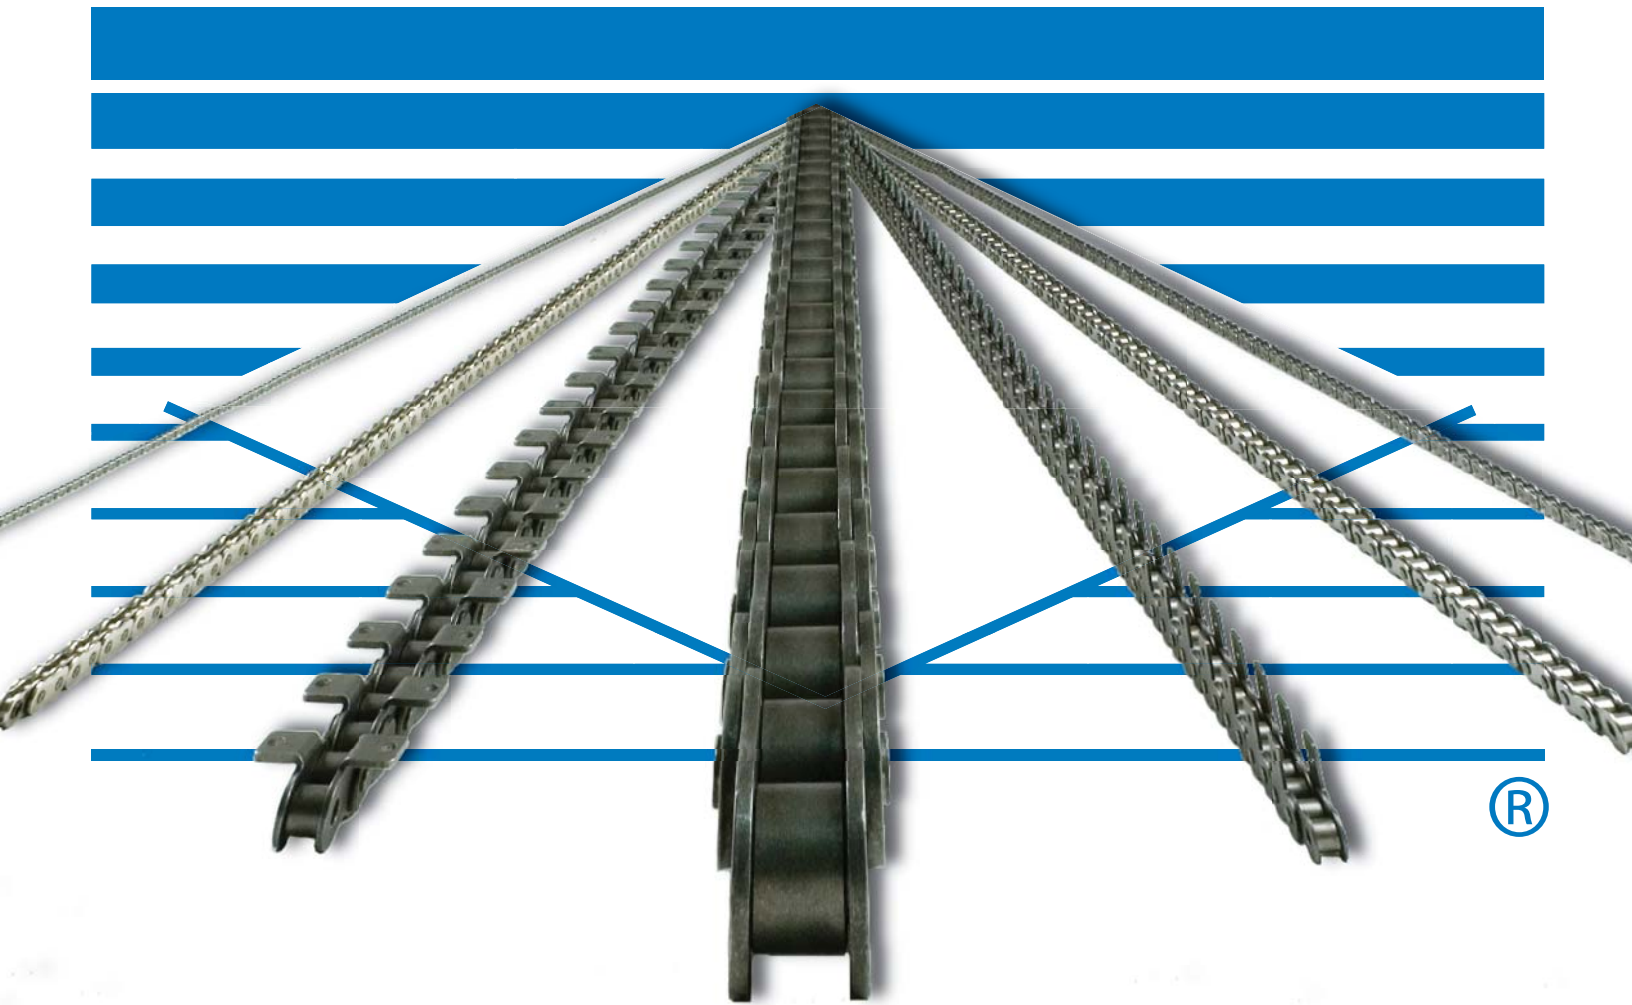

CALL 1-800-US CHAIN

1-800-872-4246

FAX 317-633-2243

**402 Kentucky Avenue
Indianapolis, IN 46207**

www.diamondchain.com

