

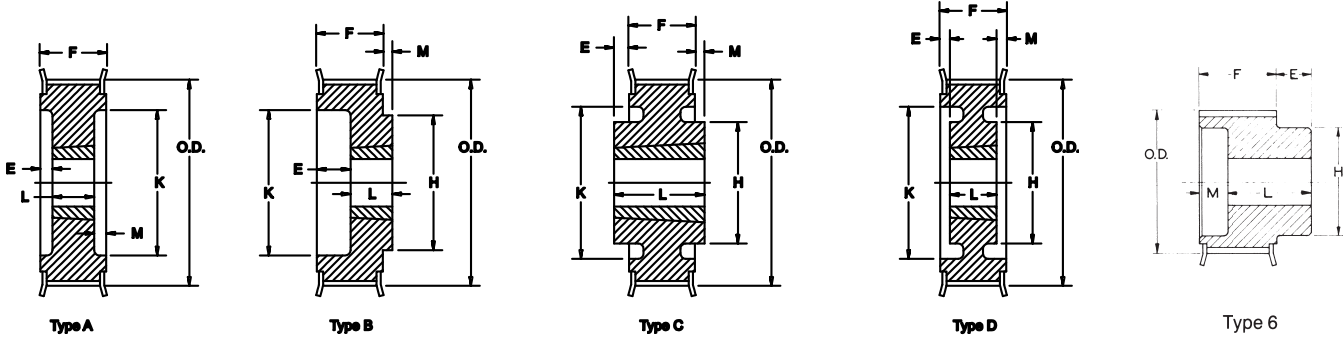


Table No. 1

Specifications

Sprocket Number	Bushing	Bore Range		Type	No. Teeth	Diameters			Dimensions					Wt. Lbs
		Min.	Max.			P. D.	O. D.	Flange	E	F	K	L	M	
FOR 14M40 BELTS — 14mm PITCH — 40mm (1.57") WIDE														
B2814M40TL	2012	1/2"	2	A1F	28	4.912"	4.802"	5.562"	—	2.13"	3.13	1.25"	.88"	6.03
B2914M40TL	2012	1/2	2	A1F	29	5.088	4.978	5.562	—	2.13	3.13	1.25	.88	6.66
B3014M40TL	2012	1/2	2	A1F	30	5.263	5.153	5.763	—	2.13	3.13	1.25	.88	6.61
B3114M40TL	2012	1/2	2	A1F	31	5.439	5.329	6.124	—	2.13	3.13	1.25	.88	7.5
B3214M40TL	2012	1/2	2	A1F	32	5.614	5.504	6.124	—	2.13	3.13	1.25	.88	7.5
B3314M40TL	2012	1/2	2	A1F	33	5.790	5.680	6.465	—	2.13	3.13	1.25	.88	9
B3414M40TL	2012	1/2	2	A1F	34	5.965	5.855	6.465	—	2.13	3.13	1.25	.88	9.52
B3514M40TL	2012	1/2	2	A1F	35	6.141	6.031	6.816	—	2.13	3.13	1.25	.88	10
B3614M40TL	2517	1/2	2 1/2	A1F	36	6.316	6.206	6.816	—	2.13	3.38	1.75	.38	10.76
B3714M40TL	2517	1/2	2 1/2	A1F	37	6.492	6.382	7.167	—	2.13	3.38	1.75	.38	11.7
B3814M40TL	2517	1/2	2 1/2	A1F	38	6.669	6.559	7.167	—	2.13	3.38	1.75	.38	12.45
B3914M40TL	2517	1/2	2 1/2	A1F	39	6.842	6.732	7.518	—	2.13	3.38	1.75	.38	13.7
B4014M40TL	2517	1/2	2 1/2	A1F	40	7.018	6.908	7.518	—	2.13	3.38	1.75	.38	14.71
B4214M40TL	2517	1/2	2 1/2	A1F	42	7.369	7.259	8.044	—	2.13	3.38	1.75	.38	16
B4414M40TL	2517	1/2	2 1/2	A1F	44	7.720	7.610	8.395	—	2.13	3.38	1.75	.38	18.07
B4614M40TL	2517	1/2	2 1/2	A1F	46	8.070	7.960	8.395	—	2.13	3.38	1.75	.38	21
B4814M40TL	2517	1/2	2 1/2	A1F	48	8.421	8.311	8.941	—	2.13	3.38	1.75	.38	22.27
B5014M40TL	2517	1/2	2 1/2	A1F	50	8.772	8.662	9.292	—	2.13	6.5	1.75	.38	25
B5214M40TL	2517	1/2	2 1/2	A1F	52	9.123	9.013	9.687	—	2.13	7.18	1.75	.38	27.03
B5614M40TL	2517	1/2	2 1/2	A1F	56	9.825	9.715	10.355	—	2.13	7.88	1.75	.38	31.6
B6014M40TL	3020	15/16	3	A1F	60	10.527	10.417	11.067	—	2.13	8.50	2	.13	29.53
B6414M40TL	3020	15/16	3	A1F	64	11.229	11.119	11.75	—	2.13	9.25	2	.13	32.54
B6814M40TL	3020	15/16	3	D1F	68	11.930	11.820	12.5	—	2.13	10	2	.13	32.67
B7214M40TL	3020	15/16	3	D1F	72	12.632	12.522	13.187	—	2.13	10.69	2	.13	39.15
B8014M40TL	3020	15/16	3	D3F	80	14.036	13.926	14.625	—	2.13	12.53	2	.13	33.1
B9014M40TL	3020	15/16	3	D3	90	15.790	15.680	—	—	2.13	14.25	2	.13	39
B11214M40TL	3020	15/16	3	A3	112	19.650	19.540	—	—	2.13	18.09	2	.13	100.5
B14414M40TL	3020	15/16	3	A3	144	25.264	25.154	—	—	2.13	23.65	2	.13	154.1
B16814M40TL	3020	15/16	3	A3	168	29.475	29.365	—	—	2.13	27.5	2	.13	133.2
B19214M40TL	3020	15/16	3	A3	192	33.686	33.576	—	—	2.13	31.75	2	.13	167.6

FOR 14M55 BELTS — 14mm PITCH — 55mm (2.17") WIDE

B2814M55TL	2012	1/2	2	A1F	28	4.912	4.802	5.562	—	2.75	3.13	1.25	1.50	7.38
B2914M55TL	2012	1/2	2	A1F	29	5.088	4.978	5.562	—	2.75	3.13	1.25	1.50	8.17
B3014M55TL	2517	1/2	2 1/2	A1F	30	5.263	5.153	5.763	—	2.75	3.38	1.75	1	7.25
B3214M55TL	2517	1/2	2 1/2	A1F	32	5.614	5.504	6.124	—	2.75	3.38	1.75	1	9.09
B3414M55TL	2517	1/2	2 1/2	A1F	34	5.965	5.855	6.465	—	2.75	3.38	1.75	1	11.11
B3614M55TL	2517	1/2	2 1/2	A1F	36	6.316	6.206	6.816	—	2.75	3.38	1.75	1	12.36
B3814M55TL	2517	1/2	2 1/2	A1F	38	6.669	6.559	7.167	—	2.75	3.38	1.75	1	15.31
B4014M55TL	2517	1/2	2 1/2	A1F	40	7.018	6.908	7.518	—	2.75	3.38	1.75	1	16.66
B4414M55TL	2517	1/2	2 1/2	A1F	44	7.720	7.610	8.395	—	2.75	3.38	1.75	1	20.72
B4814M55TL	3020	15/16	3	A1F	48	8.421	8.311	8.941	—	2.75	3.5	2	.75	24.21
B5214M55TL	3020	15/16	3	A1F	52	9.123	9.013	9.687	—	2.75	7.18	2	.75	29.26
B5614M55TL	3020	15/16	3	A1F	56	9.825	9.715	10.355	—	2.75	7.88	2	.75	34.87
B6014M55TL	3020	15/16	3	A1F	60	10.527	10.417	11.067	—	2.75	8.5	2	.75	41.55
B6414M55TL	3020	15/16	3	A1F	64	11.229	11.119	11.75	—	2.75	9.25	2	.75	48.04
B6814M55TL	3020	15/16	3	D1F	68	11.930	11.820	12.5	—	2.75	10	2	.75	42.91
B7214M55TL	3020	15/16	3	D1F	72	12.632	12.522	13.187	—	2.75	10.69	2	.75	47.51
B8014M55TL	3020	15/16	3	D3F	80	14.036	13.926	14.625	—	2.75	12	2	.75	37.91
B9014M55TL	3020	15/16	3	D3	90	15.790	15.680	—	—	2.75	14.22	2	.75	55
B11214M55TL	3020	15/16	3	D2	112	19.650	19.540	—	—	2.75	18.04	2	.75	116
B14414M55TL	3020	15/16	3	D3	144	25.264	25.154	—	—	2.75	23.38	2	.75	98
B16814M55TL	3020	15/16	3	D3	168	29.475	29.365	—	—	2.75	27.5	2	.75	145.5
B19214M55TL	3020	15/16	3	C3	192	33.686	33.576	—	—	2.75	31.93	2	.75	432.3

NOTE— Numerals in Type Designations mean: 1 = Solid, 2 = Web, 3 = Arm Construction; F = Flanged Sprocket.