

Wilkerson Miniature Combination Units (Filter, Regulator, Lubricator)

Features:

- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 175°F** (0°C to 80°C)
- Included components: (2) adapters

Filter series F03:


- 5 micron element
- .5 oz. bowl

Regulator series R03:

- 2-125 PSI adjusting range
- balanced valve design
- self-relieving
- supplied with a GC620 gauge
- can be mounted with knob in up or down position

Lubricator series L03:

- 1 oz. bowl
- adjustable oil feed
- full view sight dome

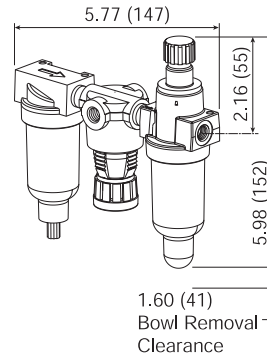

transparent bowl

F

Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	20	C03-01A	\$226.40	C03-01M	\$217.00	C03-01AMB	\$241.00	C03-01MMB	\$231.70
1/4"	20	C03-02A	227.00	C03-02M	217.60	C03-02AMB	241.60	C03-02MMB	232.30

Features:

- maximum operating conditions:
 - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
 - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)
- Included components: (2) mounting brackets with joiner set

Filter series F08:


- 5 micron element
- .4 oz. bowl

Regulator series R08:

- 0-125 PSI adjusting range
- balanced valve design
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge

Lubricator series L08:

- .6 oz. bowl
- adjustable oil feed
- full view sight dome

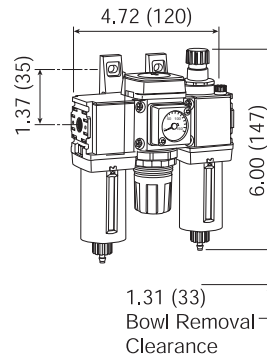

metal bowl

Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	29	C08-01A	\$263.55	C08-01M	\$254.40	C08-01AMB	\$277.20	C08-01MMB	\$269.70
1/4"	44	C08-02A	263.55	C08-02M	254.40	C08-02AMB	277.20	C08-02MMB	269.70



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.