

PN Gold Mounted Ball Bearings

SEALMASTER®



Duty: Standard

Housing: High Strength Composite Four Bolt Flange



Self-Alignment: +/- 2 Degrees

Lock: Skwezloc Locking Collar

Seal: HPS

Temperature: 0° to 150°F

Grease: Sealmaster GoldPlex-FG

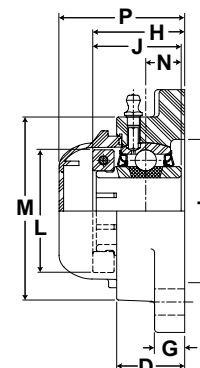

CRFC Bearings

CRFC-PN T Series 4 Bolt Flange Skwezloc Locking Collar

Bore Diameter		Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch/mm												Unit Wt. lb/kg	Open Cap	Closed Cap	Backside Shield
					A	B	G	D	H	J	L	M	N	P	T	Bolt Size				
inch	mm																			
3/4	-	CRFC-PN12T	PN-12T	2611 11614	3 7/16	2 1/2	7/16	61/64	1 9/32	1 7/32	1 3/4	2 3/8	1/2	2 13/64	2	3/8	.78 .35	ECO-12	ECC-12	4BSS-12
-	20	CRFC-PN204T	PN-204T		87.3	63.5	11.1	24.2	32.5	31.0	44.5	60.3	12.7	56.0	50.8					
1	-	CRFC-PN16T	PN-16T	2801 12459	3 51/64	2 3/4	17/32	1 5/64	1 7/16	1 3/8	1 15/16	2 21/32	9/16	2 23/64	2 3/16	7/16	.99 .45	ECO-16	ECC-16	4BSS-16
-	25	CRFC-PN205T	PN-205T		96.4	69.9	13.5	27.4	36.5	34.9	49.2	67.5	14.3	59.9	55.6					
1 3/16	-	CRFC-PN19T	PN-19T	4381 19488	4 11/32 110.3	3 1/4 82.6	17/32 13.5	1 13/64 30.6	1 9/16 39.7	1 1/2 38.1	2 3/16 55.6	3 3/16 81.0	5/8 15.9	2 15/32 62.7	2 9/16 65.1	7/16	1.54 .70	ECO-19	ECC-19	4BSS-19
1 1/4	-	CRFC-PN20RT	PN-20RT															ECO-20R		4BSS-20R
-	30	CRFC-PN206T	PN-206T															ECO-19		4BSS-19
1 1/4	-	CRFC-PN20T	PN-20T	5782 25720	4 53/64 122.6	3 5/8 92.1	9/16 14.3	1 11/32 34.1	1 3/4 44.5	1 11/16 42.9	2 7/16 61.9	3 21/32 92.9	11/16 17.5	2 43/64 67.9	2 15/16 74.6	1/2	2.21 1.00	ECO-20	ECC-23	4BSS-20
1 3/8	-	CRFC-PN22T	PN-22T	5782 25720	4 53/64 122.6	3 5/8 92.1	9/16 14.3	1 11/32 34.1	1 3/4 44.5	1 11/16 42.9	2 9/16 65.1	3 21/32 92.9	11/16 17.5	2 43/64 67.9	2 15/16 74.6	1/2	2.21 1.00	ECO-23	ECC-23	4BSS-22
1 7/16	-	CRFC-PN23T	PN-23T																	4BSS-23
-	35	CRFC-PN207T	PN-207T																	N/A
1 1/2	-	CRFC-PN24T	PN-24T	5307	5 1/4	4	9/16	1 1/2	2 1/64	1 15/16	2 11/16	4 1/64	3/4	2 15/16	3 9/32	1/2	2.78 1.26	ECO-24	ECC-24	4BSS-24
-	40	CRFC-PN208T	PN-208T	23607	133.4	101.6	14.3	38.1	51.2	49.2	68.3	102.0	19.1	74.6	83.3					N/A

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.