

Ultimate Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.

Series 9000 mobile base reels offer the greatest amount of stability for high volume air, water, diesel fuel and gasoline. Ideal for portable service trucks, permanent service or plant work areas. A durable baked-on powder coat finish produces a rugged corrosion resistant product suitable for a wide variety of heavy duty applications. Basic reels without hose will handle air, water or oil; consult Reelcraft for other applications.


Made

in USA



D9350 OLPBW

	Dimensions - Size Index					
	1		2		3	
	in	mm	in	mm	in	mm
A	26 3/8	670	26 3/8	670	26 3/8	670
B	26 1/4	667	26 1/4	667	26 1/4	667
C	22 1/4	565	22 1/4	565	22 1/4	565
D	7 3/4	197	13 1/2	343	7 3/4	197
E	12	305	17 3/4	451	13 3/8	340
F	24 1/8	613	24 1/8	613	24 1/8	613
G	4 3/4	121	3 7/8	98	4 1/2	114

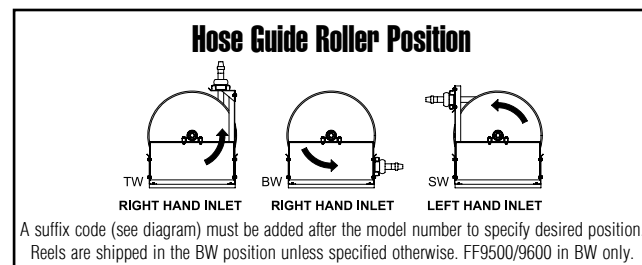

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight	Pressure	Size Index #
	lbs kg	in mm	in mm	ft m	psi bar	in	in		lbs kg	psi bar	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C)											
D9275 OLP	122 55	1/2 13	.750 19	75 23	300 21	1/2	1/2	D9200 OLP	115 52	500 35	1
D9299 OLP	127 58	1/2 13	.750 19	100 30	300 21	1/2	1/2	D9200 OLP	115 52	500 35	1
D9350 OLP	140 64	3/4 19	1.075 27	50 15	250 17	3/4	3/4	D9300 OLP	115 52	500 35	1
D9375 OLP	152 69	3/4 19	1.075 27	75 23	250 17	3/4	3/4	D9300 OLP	115 52	500 35	1
D9399 OLPBW	143 65	3/4 19	1.075 27	100 30	250 17	3/4	3/4	D9305 OLPBW	115 52	500 35	3
D9450 OLP	157 71	1 25	1.375 35	50 15	250 17	3/4	1	D9400 OLP	115 52	500 35	1
D9465 OLPBW	164 74	1 25	1.375 35	65 20	250 17	3/4	1	D9405 OLPBW	115 52	500 35	3
Not available with hose		1 1/4 32	1.750 44	50 15	---	---	1 1/2	FF9500 OLPBW	125 57	600 41	2
Not available with hose		1 1/2 38	2.000 51	50 15	---	---	1 1/2	FF9600 OLPBW	135 61	600 41	2
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)											
D9275 OMP	131 59	1/2 13	.820 21	75 23	3250 224	1/2	1/2	D9200 OMP	117 53	3250 224	1
D9350 OMP	142 64	3/4 19	1.188 30	50 15	1250 86	3/4	3/4	D9300 OMP	117 53	3000 207	1
E9450 OMP	160 73	1 25	1.480 38	50 15	3250 224	1	1	E9400 OMP	120 54	3250 224	1
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)											
D9175 OHP	153 69	3/8 10	.730 19	75 23	4800 331	3/8	1/2	D9100 OHP	118 54	5000 345	1

Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100 R2T two wire braid hose. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example D9300 OLP70. FF9500 and FF9600 models will have BSPP threads. **Note: To specify our heavy duty model, change prefix from D to E. Not available on FF9500 or FF9600.** Modification: Reels without hose can be modified to handle gasoline and diesel fuel, to order place prefix "F" before model number - example (FD9300 OLP). Reference page 6 for guide arm positions.

Available Options

Optional Roller Guides
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50

