

Anti-Freeze Lubricants

Application:

- winter grade air tool lubricant prevents air line, air tool and in-line lubricator freeze-up

Features:

- can be poured directly into tool or used with air line lubricators
- minimum temperature **-45°F**

Size	Part #	Price/E	Opt Qty
1 pint	DATL016W	\$26.00	12
1 gallon	DATL128W	158.00	4



1 pint

1 gallon

F

Air Tool Lubricants

Application:

- high grade lubricant prolongs the service life of air tools, cylinders and accessories

Features:

- #10 weight lubricant
- compound is superior in performance to ordinary lubricants
- prohibits rust and removes moisture as it lubricates
- non-corrosive, non-reactive and does not decompose
- easy pour spout helps prevent costly spills
- use with the in-line lubricators on page 130

Size	Part #	Price/E	Opt Qty
1 pint	DATL016	\$16.00	12
1 gallon	DATL128	69.00	4



1 pint

1 gallon

Valves

Button

Thread	Brass	
	Part #	Price/E
1/4" NPT female	BV2F	\$24.75
1/4" NPT male	BV2M	24.75



Tank Filler


Application:

- used on compressed air tanks and other applications

Feature:

- standard valve stem thread

Connection	Length	Material	Part #	Price/E
1/8" NPT	7/16"	<i>nickel plated</i>	TFV1S	\$5.10
1/8" NPT	3/4"	<i>brass</i>	TFV1L	6.30
1/4" NPT	3/4"	<i>nickel plated</i>	TFV2	5.95
1/4" barb	11/16"	<i>brass</i>	TFV2HB	8.45

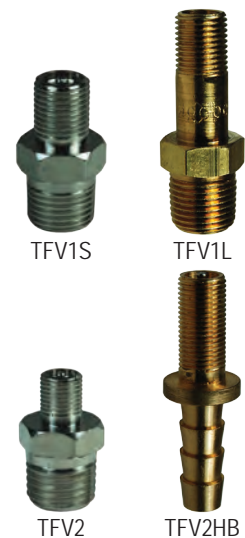

TFV1S

TFV1L

TFV2

TFV2HB