



Spiral Guard™ Flame Retardant Hose & Cable Protection



Flame Retardant Version



Standard Version

Provides heavy duty protection for hose, cable or wire. Used in offshore industries, mining, quarrying, forestry, and most hydraulic hose applications.

- chemical and UV ray resistant
- self-lubricating to reduce hose wear
- easy to install on-site
- smooth radius on all edges
- can be used on single or multiple hose bundles
- spiral guard ID is equal to the guard at rest
- sold in coil lengths only

Flame Retardant Product

- approved by MSHA 1C-231/1
- flame retardant and self extinguishing
- temperature range: **-148°F to 212°F (-100°C to 100°C)**

Nominal ID	Coil Length	OD Range (inches)	Flame Retardant Part #
½"	66'	½" to 5/8"	FRSGX16
5/8"	66'	5/8" to 7/8"	FRSGX20
¾"	66'	7/8" to 1-1/16"	FRSGX25
15/16"	66'	1-1/16" to 1-¼"	FRSGX32
1-¼"	66'	1-¼" to 1-5/8"	FRSGX40
1-½"	66'	1-5/8" to 2-1/8"	FRSGX50
1-15/16"	66'	2" to 2-½"	FRSGX63
2-3/8"	66'	2-½" to 3-¼"	FRSGX75
2-5/8"	66'	3" to 6"	FRSGX90
3-3/16"	33'	6" plus	FRSGX110

Standard Product

- **NOT** flame retardant
- temperature range: **-58°F to 194°F (-50°C to 90°C)**

Nominal ID	Coil Length	OD Range (inches)	Standard Product Part #
½"	66'	½" to 5/8"	NFSGX16
5/8"	66'	5/8" to 7/8"	NFSGX20
¾"	66'	7/8" to 1-1/16"	NFSGX25
15/16"	66'	1-1/16" to 1-¼"	NFSGX32
1-¼"	66'	1-¼" to 1-5/8"	NFSGX40
1-½"	66'	1-5/8" to 2-1/8"	NFSGX50
1-15/16"	66'	2" to 2-½"	NFSGX63
2-3/8"	66'	2-½" to 3-¼"	NFSGX75
2-5/8"	66'	3" to 6"	NFSGX90
3-3/16"	33'	6" plus	NFSGX110

Fire Jackets for Hose

Used to protect hose and hose assemblies, tubing, piping, wiring and cables from high temperatures or molten splash. Helps maintain line temperature and reduce environmental overheating or overcooling.



- compounded silicone rubber coating over fiberglass
- completely non-asbestos
- resistant to hydraulic fluids and lubricating oil
- sleeving slides easily over hose and expands to go over fittings
- color is iron oxide red
- supplied in 50' lengths
- temperature range: **-65°F to 500°F (-54°C to 260°C)**

Nominal ID	Standard Product Part #
¼"	0610-4
3/8"	1010-6
½"	1310-8
5/8"	1610-10
¾"	1910-12
7/8"	2210-14
1"	2510-16
1-¼"	3210-20
1-½"	3810-24
1-¾"	4510-28
2"	5110-32
2-½"	6410-40
3"	7610-48
4"	10210-64

Fiberglass Sleeving

- Braided texturized fiberglass tubing provides thermal insulation protection in applications with service temperatures up to **1000°F**.




- 1/16" wall thickness is braided from texturized E-glass filament yarns. The untreated tubing is flexible and expands to cover changing diameters.

Nominal ID	100' rolls Part #	Nominal ID	100' rolls Part #
1/4"	LW04200	1-1/4"	LW20200
3/8"	LW06200	1-1/2"	LW24200
1/2"	LW08200	2"	LW32200
5/8"	LW10200	2-1/2"	LW40200
3/4"	LW12200	3"	LW48200
7/8"	LW14200	3-1/2"	LW56200
1"	LW16200	4"	LW64200

Protective Hose Coverings



- Woven nylon tubular sleeves are uniquely designed and ideal for protecting the coverings on hydraulic and industrial hoses.
- MSHA accepted
- withstands temperature up to **275°F (135°C)**
- fully passes flammability tests
- tight weave of the seamless tubular sleeving helps dispense the flow of fluid in a ruptured hose

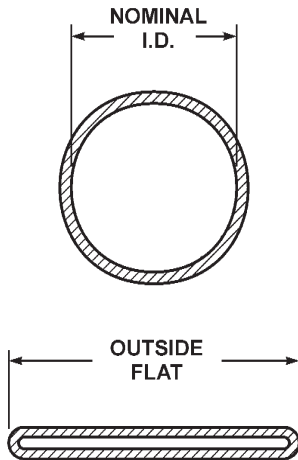

Nominal ID	Outside Flat	100' rolls Part #	300' rolls Part #
0.90"	1.50"	DHS90-100	DHS90-300
1.00"	1.66"	DHS100-100	DHS100-300
1.13"	1.88"	DHS106-100	DHS106-300
1.25"	2.13"	DHS122-100	DHS122-300
1.46"	2.25"	DHS138-100	DHS138-300
1.42"	2.50"	DHS142-100	DHS142-300
1.58"	2.75"	DHS159-1-100	DHS159-1-300
1.78"	2.88"	DHS175-100	DHS175-300
1.91"	3.00"	DHS181-100	DHS181-300
2.18"	3.63"	DHS219-100	DHS219-300
2.38"	3.88"	DHS238-100	DHS238-300
2.65"	4.25"	DHS263-100	DHS263-300
2.86"	4.75"	DHS288-100	DHS288-300
3.65"	5.88"	DHS366-100	DHS366-300

Dixon's couplings and retention devices are designed to work safely for their intended use. The selection of the proper hose, coupling and retention device, and the proper application of the coupling to the hose are of utmost importance.

Users must consider the size, temperature, application, media, pressure and hose and coupling manufacturer's recommendations when selecting the proper hose assembly components. Dixon recommends that all hose assemblies be tested in accordance with the Rubber Manufacturers Association's recommendations and be inspected regularly (before each use) to ensure that they are not damaged or have become loose. Visit RMA.org for more information. Where safety devices are integral to the coupling, they must be working and utilized. The use of supplementary safety devices such as safety clips or safety cables are recommended. If any problem is detected, couplings must be removed from service immediately.

Dixon is available to consult, train and recommend the proper selection and application of all fittings we sell. We strongly recommend that distributors and end users make use of Dixon's Testing and Recommendation Services. Call 877-963-4966 or click dixonvalve.com to learn more.



The Right Connection™

Dixon Valve & Coupling Company

800 High Street, Chestertown, MD 21620

Phone: 877.963.4966

Fax: 410-778-4702 • 800-283-4966

www.dixonvalve.com



The Right Connection™