




| KVA        | A     | B     | C     | D    | E     | F     | WT.<br>LBS. |
|------------|-------|-------|-------|------|-------|-------|-------------|
| 9          | 20.30 | 9.03  | 14.86 | 4.00 | 13.25 | 7.00  | 300         |
| 11         | 20.30 | 9.03  | 14.86 | 4.00 | 13.25 | 7.00  | 265         |
| 14         | 20.30 | 9.03  | 14.86 | 4.00 | 13.25 | 7.00  | 270         |
| 15         | 20.30 | 9.03  | 14.86 | 4.00 | 13.25 | 7.00  | 300         |
| 20         | 20.94 | 10.18 | 16.77 | 4.00 | 13.88 | 8.16  | 435         |
| 30         | 23.69 | 10.37 | 17.36 | 4.00 | 11.72 | 8.62  | 445         |
| 45         | 27.89 | 12.76 | 17.86 | 4.00 | 14.50 | 11.01 | 635         |
| 75         | 32.39 | 13.79 | 20.82 | 4.00 | 18.00 | 12.04 | 928         |
| 75<br>AUTO | 20.30 | 9.03  | 14.86 | 4.00 | 13.25 | 7.00  | 300         |

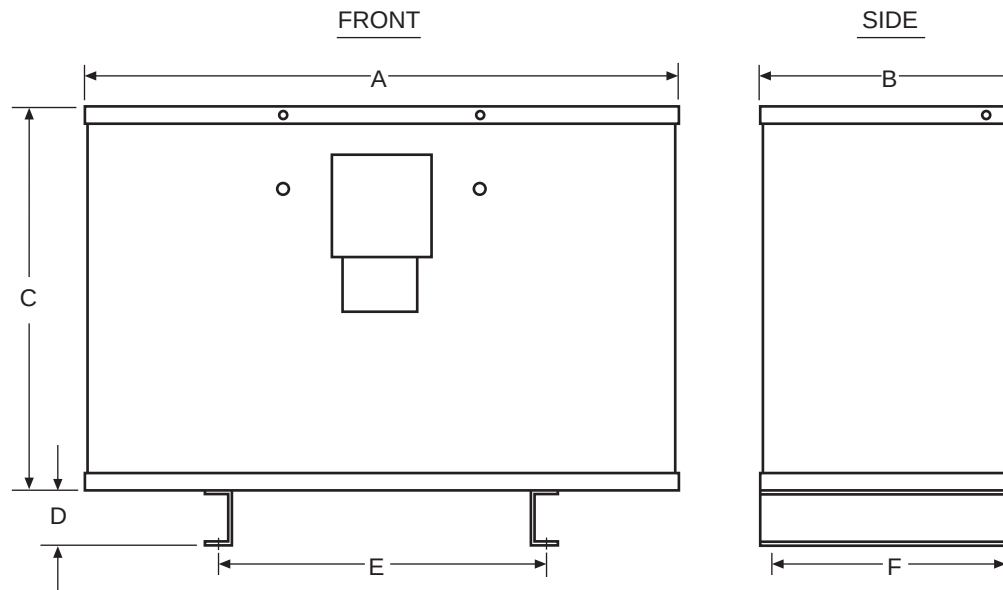

**Acme Electric  
Corporation**

Power Distribution Products Division

4815 West Fifth Street  
Lumberton, NC 28358  
910-738-1121 Inside NC  
800-334-5214 Outside NC  
910-739-0024 Fax  
[www.acmepowerdist.com](http://www.acmepowerdist.com)

A-700070-46