



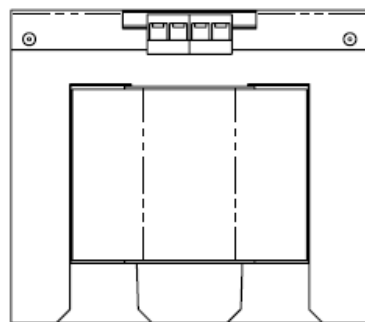


Revisions



Type No.

Date: March 16, 2010

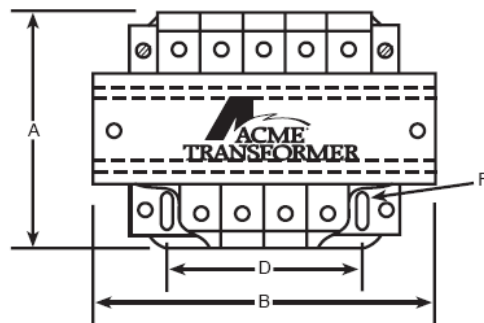

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
3000	FS-2-3000	240 x 480	120		60 Lbs	1φ	50/60 Hz

Temp. Rise:	80°C
Insulation:	130°C
Windings:	CU

TYPICAL PERFORMANCE DATA

Standard	UL/CSA/CE	Impedance:	
----------	-----------	------------	--

FINGER/GUARD

Typical Efficiency	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F				
7.44	7.50	6.68	6.50	6.47	.41 x .81				

A

PRINTS TO

CONTROL
7