



The Right Connection™

Gauges & Thermometers

All of the gauges supplied by Dixon are designed for long, reliable service under rugged conditions.

Dry Gauges

styles

- standard
- Flutterguard™
- Contractor Pressure
- Compound
- Vacuum
- Welding

materials

- ABS
- Brass
- Stainless steel

face size

- 1½"
- 2"
- 2½"
- 3½"
- 4½"

(contractor pressure gauge only)

mount type

- lower
- center back



**Welding
gauge**



**Vacuum
gauge**



**Brass Standard
gauge**



**General Purpose
digital gauge**



**Flutterguard™
gauge**



**Standard
center back mount
gauge**



**Contractor Pressure
gauge**



**Stainless Steel Standard
gauge**



**Compound
gauge**

Liquid Filled Gauges

styles

- standard

mount type

- lower
- center back

materials

- ABS
- Brass
- Stainless steel

face size

- 2½"
- 4"



Stainless Steel
center back mount
gauge



ABS
gauge



Brass
gauge

Thermometers & Miscellaneous

thermometers

- bi-metal
 - model 30
 - model 31
 - model 50
 - model 52
- pocket
- magnetic surface mount
- threaded thermowells
- 180° steam gauge siphon



Bi-metal
thermometer




Magnetic
thermometer



Pocket Bi-metal
thermometer



180° steam gauge siphon

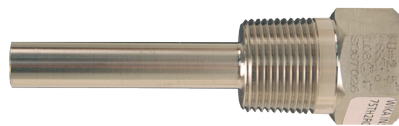

threaded thermowells

Hose Coupling Safety

- Use Dixon couplings, retention devices and accessory products **only** for their intended service.
- All recommendations of the Hose Manufacturer, and the Coupling Manufacturer, must be employed with regards to **Size, Temperature, Application, Media, and Pressure** when selecting the components for a hose assembly.
- All finished hose assemblies should be tested in accordance with the Rubber Manufacturers Association recommendations.
- All hose assemblies should be thoroughly inspected prior to each use to insure they are undamaged, and properly coupled.
- Use safety clips on couplings, and King Safety Cables on assemblies where required by the manufacturer, as well as State and Federal regulations.
- Call Dixon (1-800-355-1991) for advice on couplings, retention devices, and accessories for your application.



The Right Connection™

Dixon Valve & Coupling Co.
800 High Street • Chestertown, MD 21620
800.355.1991
Fax: 800.283.4966
www.dixonvalve.com